


## From V2.2.5 to V2.3.2

### Upgrade i4500R/i5500 firmware to v2.3.2

1. Login as admin from web interface to your i4500R/i5500.
2. In the [Maintenance] menu, choose the [Upgrade] item.
3. Press the [browse] button and select the firmware you download from Thecus website.
4. Press [Confirm] and the confirm window will pop up. Please select [OK] button. The entire upgrade takes about 3 minutes.



5. During firmware upgrade process, you will see a blue progressing bar indicating the percentage of completeness.

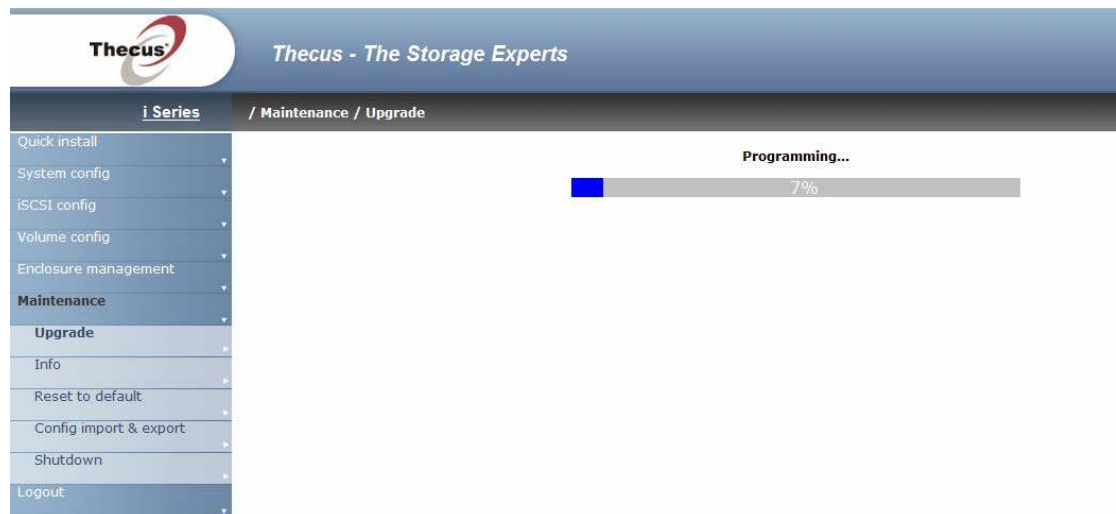

**NOTE: During firmware upgrade process, it is imperative that user do not turn off the power to device or close the browser.**

6. After the firmware is upgraded, Press [Maintenance] of menu, and choose the [Shutdown] item.
7. Please select [Reboot] to start reboot process.
8. When system boots up successfully, the device buzzer will alarms 1 second.
9. Re-login the system, please enter username and password again.
10. In case, the upgrade process failed, please DO NOT restart or shutdown the NAS. Get back to step #2 and upgrade the firmware again.