

OS7 User's Manual

N2350/N4350

Copyright and Trademark Notice

Thecus and other names of Thecus products are registered trademarks of Thecus Technology Corp. Microsoft, Windows, and the Windows logo are registered trademarks of Microsoft Corporation. Apple, iTunes and Apple OS X are registered trademarks of Apple Computers, Inc. All other trademarks and brand names are the property of their respective owners. Specifications are subject to change without notice.

Copyright © 2017 Thecus Technology Corporation. All rights reserved.

About This Manual

All information in this manual has been carefully verified to ensure its correctness. In case of an error, please provide us with your feedback. Thecus Technology Corporation reserves the right to modify the contents of this manual without notice.

Product name: N2350/N4350

Manual Version: 1.5

Release Date: 2017/06

Limited Warranty

Thecus Technology Corporation guarantees all components of Thecus NAS products are thoroughly tested before they leave the factory and should function normally under general usage. In case of any system malfunctions, Thecus Technology Corporation and its local representatives and dealers are responsible for repair without cost to the customer if the product fails within the warranty period and under normal usage. Thecus Technology Corporation is not responsible for any damage or loss of data deemed to be caused by its products. It is highly recommended that users conduct necessary back-up practices.

Check the functions that are available on your particular Thecus NAS model at:
<http://www.Thecus.com>

Safety Warnings

For your safety, please read and follow the following safety warnings:

- Read this manual thoroughly before attempting to set up your Thecus IP storage.
- Your Thecus IP storage is a complicated electronic device. DO NOT attempt to repair it under any circumstances. In the case of malfunction, turn off the power immediately and have it repaired at a qualified service center. Contact your vendor for details.
- DO NOT allow anything to rest on the power cord and DO NOT place the power cord in an area where it can be stepped on. Carefully place connecting cables to avoid stepping or tripping on them.
- Your Thecus IP storage can operate normally under temperatures between 5°C and 40°C, with relative humidity of 20% – 85%. Using Thecus IP storage under extreme environmental conditions could damage the unit.
- Ensure that the Thecus IP storage is provided with the correct supply voltage. Plugging the Thecus IP storage to an incorrect power source could damage the unit.
- Do NOT expose Thecus IP storage to dampness, dust, or corrosive liquids.
- Do NOT place Thecus IP storage on any uneven surfaces.
- DO NOT place Thecus IP storage in direct sunlight or expose it to other heat sources.
- DO NOT use chemicals or aerosols to clean Thecus IP storage. Unplug the power cord and all connected cables before cleaning.
- DO NOT place any objects on the Thecus IP storage or obstruct its ventilation slots to avoid overheating the unit.
- Keep packaging out of the reach of children.
- If disposing of the device, please follow your local regulations for the safe disposal of electronic products to protect the environment.
- Risk of explosion if battery is replaced by an incorrect type.
- Dispose of used batteries according to the instructions

Table of Contents

Copyright and Trademark Notice	2
About This Manual	2
Limited Warranty	2
Safety Warnings	3
Table of Contents	4
Chapter 1: Introduction.....	7
Overview	7
Product Highlights	7
Package Contents.....	9
N2350.....	10
Front Panel.....	10
Rear Panel	11
N4350 Series	12
Front Panel.....	12
Rear Panel	13
Chapter 2: Hardware Installation	14
Overview	14
Before You Begin.....	14
Cable Connections	14
Chapter 3: First Time Setup	16
Overview	16
Thecus Setup Wizard	16
Typical Setup Procedure	18
Chapter 4: System Administration	19
Overview	19
Web Administration Interface.....	19
Menu Tree.....	20
Feedback for OS7.0	22
Quick System Log Info.....	22
Quick System Resource Monitor	22
System shut down and reboot	23
Language Selection	23
Logout	23
Change Password	23
Thecus OS7.0 Web Interface Revision (FW v3.02.00 and after)	24
Control Panel	24
CONTROL	24
Log and Notification.....	24
Power & Hardware.....	28
System Information.....	32
Network.....	34
Regional Option	40
External Device.....	42
Monitor	42
Firmware Setting	44
PRIVILEGE.....	46
Share Folder.....	46
Adding Folders.....	47
Modify/Remove Folders.....	50
Local Account	54
ADS	63

LDAP	65
Storage	66
Disk & RAID	66
iSCSI.....	80
ISO Mount.....	92
Disk Clone & Wipe.....	94
Services	96
File Service	96
Web Service	104
SSH Service	105
iTunes Service	105
VPN Service.....	107
UPnP Service	110
Backup.....	112
Local Backup	112
Remote Backup.....	122
Rsync Service	130
USB Copy.....	132
AWS S3	135
System Failover	135
Chapter 5: General User Login.....	135
Overview.....	135
General User Login Interface.....	135
Menu Tree.....	136
Quick System Resource Monitor	136
Language Selection	138
Logout	138
Change Password	138
App Center	138
File Center	140
Photo Center	142
Chapter 6: Tips and Tricks.....	144
Access your NAS from Windows	144
Share folder accessibility with associated login user account.....	144
USB Storage Expansion.....	145
Remote Administration.....	145
Part I - Setup a DynDNS Account.....	146
Part II - Enable DDNS on the Router.....	146
Part III - Setting up Virtual Servers (HTTPS)	146
Firewall Software Configuration	146
Replacing Damaged Hard Drives.....	147
Hard Drive Damage	147
Replacing a Hard Drive	147
RAID Auto-Rebuild	147
Chapter 7: Troubleshooting	148
Forgot My Network IP Address	148
Can't Map a Network Drive in Windows XP.....	148
Restoring Factory Defaults.....	148
Problems with Time and Date Settings	149
Appendix A: Customer Support.....	150
Appendix B: RAID Basics	151
Overview.....	151
Benefits	151
Improved Performance	151

Data Security	151
RAID Levels	151
Overview	154
What is Active Directory?.....	154
ADS Benefits.....	154
Appendix D: Licensing Information	155
Overview	155
Source Code Availability	155
CGIC License Terms.....	156
GNU General Public License	156

Chapter 1: Introduction

Overview

Thank you for choosing the Thecus IP Storage Server. The Thecus IP storage is an easy-to-use storage server that allows a dedicated approach to storing and distributing data on a network. Data reliability is ensured with RAID features that provide data security and recovery—over multiple Terabyte of storage are available using RAID 5 and RAID 6. Gigabit Ethernet ports enhance network efficiency, allowing Thecus IP storage to take over file management functions, increase application and data sharing and provide faster data response. The Thecus IP storage offers data mobility with a disk roaming feature that lets you swap working hard drives for use in other Thecus IP storage, securing the continuity of data in the event of hardware failure. The Thecus IP storage allows data consolidation and sharing between Windows (SMB/CIFS), UNIX/Linux, and Apple OS X environments. The Thecus IP storage's user-friendly GUI supports multiple Languages.

Product Highlights

File Server

First and foremost, the Thecus IP storage allows you to store and share files over an IP network. With a Network Attached Storage (NAS) device, you can centralize your files and share them easily over your network. With the easy-to-use web-based interface, users on your network can access these files in a snap.

FTP Server

With the built-in FTP Server, friends, clients, and customers can upload and download files to your Thecus IP storage over the Internet with their favorite FTP programs. You can create user accounts so that only authorized users have access.

iTunes Server

With the built-in iTunes server capability, the Thecus IP storage enables digital music to be shared and played anywhere on the network!

Printer Server

With the Thecus IP storage's Printer Server, you can easily share an IPP printer with other PCs connected to your network.

Multiple RAID

Thecus IP storage supports multiple RAID volumes on one system. So, you can create RAID 0 for your non-critical data, and create RAID 1,5,6,50 or 60 (depend on model) for mission-critical data. Create the RAID levels depending on your needs.

iSCSI Capability

Thecus IP storage is not only a file server, but it also supports iSCSI initiators. Your server can access Thecus IP storage as a direct-attached-storage over the LAN or Internet. There is no easier way to expand the capacity of your current application servers. All the storage needs can be centrally managed and deployed. This brings ultimate flexibility to users.

Superior Power Management

Thecus IP storage supports schedule power on/off. With this feature, administrator can set at what time to turn on or off the system. This feature is a big plus for people who want to conserve energy. Wake-On-LAN enables administrator to remotely turn on the system without even leaving their own seat.

Package Contents

N2350 Series/N4350 Series

The Thecus IP storage should contain the following common items:


- System Unit x1
- QIG (Quick Installation Guide) x1
- CD-Title (OS7 Universal CD)
- Ethernet Cable x1
- Accessory box x1
- HDD Compatibility list Card x1
- Multiple Languages Warranty Card x1
- Power adaptor cable tie x1
- Power adaptor x1
- Power cord x1

Please check to see if your package is complete. If you find that some items are missing, contact your dealer.

N2350

Front Panel

The Thecus N2350 front panel has the device's controls, indicators, and hard disk trays:

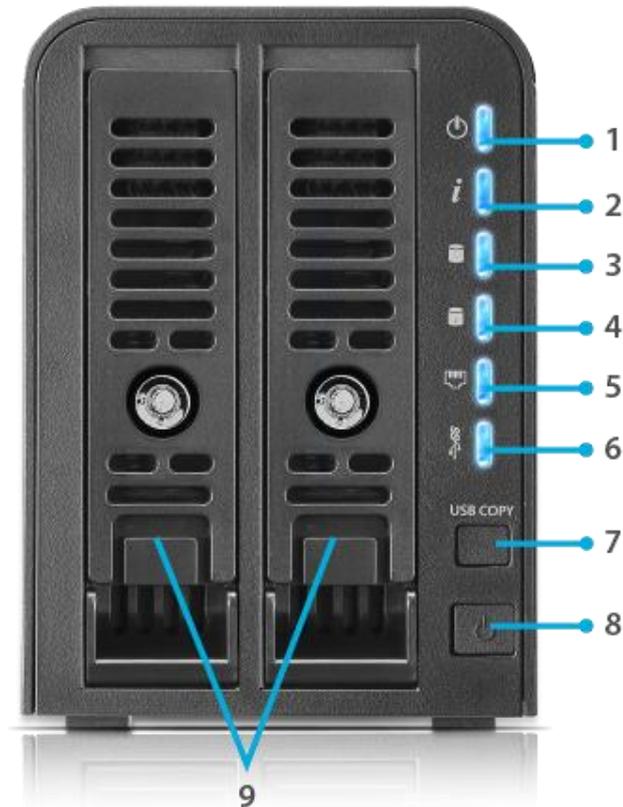

Front Panel	
Item	Description
1. Power LED	Solid blue: System ready Blinking blue: Power on process Solid Orange: System with error occurred
2. System status LED	Blinking blue: Diagnostic mode kick-in Solid blue: Diagnostic completed Solid Orange: System with error occurred
3. HDD1 LED	Blinking blue: HDD activity Orange: HDD failure
4. HDD2 LED	Blinking blue: HDD activity Orange: HDD failure
5. LAN LED	Solid blue: LAN Cable link Blinking : Network activity
6. USB LED	Solid blue: Installed Blinking blue: USB copy activity Solid Orange: USB copy failure
7. USB Copy Button	Copies USB storage contents to N2350.
8. Power Button	Power the N2350 on/off.
9. HDD Trays	Two HDD Trays for two 2.5"/3.5" SATA HDDs with Hot-swappable supports.

Rear Panel

The N2350 rear panel features ports and connectors.



Back Panel	
Item	Description
1. USB 3.0 Port	USB 3.0 port for compatible USB devices, such as digital cameras, USB disks, and USB printers.
2. USB 3.0 Port	USB 3.0 port for compatible USB devices, such as digital cameras, USB disks, and USB printers.
2. LAN Port	LAN port for connecting to an Ethernet network through a switch or a router.
4. Reset Button	Resets the N2350. Pressing and holding the Reset button on the back for 1 seconds will reset your network setting and password, and turn off Jumbo Frame Support.
5. Power Connector	Connect the included power cords to this connector.
6. System Fan	System fan that exhausts heat from the unit.

N4350 Series

Front Panel

The Thecus N4350 Series front panel has the device's controls, indicators, and hard disk trays:



Front Panel	
Item	Description
1. Power LED	Solid blue: System ready Blinking blue: Power on process Solid Orange: System with error occurred
2. System status LED	Blinking blue: Diagnostic mode kick-in Solid blue: Diagnostic completed Solid Orange: System with error occurred
3. HDD1-4 LED	Blinking blue: HDD activity Orange: HDD failure
4. LAN LED	Solid blue: LAN Cable link Blinking : Network activity
5. USB LED	Solid blue: Installed Blinking blue: USB copy activity Solid Orange: USB copy failure
6. USB Copy Button	Copies USB storage contents to N4350.
7. Power Button	Power the N4350 on/off.
8. HDD Trays	Two HDD Trays for two 2.5"/3.5" SATA HDDs with Hot-swappable supports.

Rear Panel

The N4350 Series rear panel features ports and connectors.



Back Panel	
Item	Description
1. USB 3.0 Port	USB 3.0 port for compatible USB devices, such as digital cameras, USB disks, and USB printers.
2. USB 3.0 Port	USB 3.0 port for compatible USB devices, such as digital cameras, USB disks, and USB printers.
3. LAN Port	LAN port for connecting to an Ethernet network through a switch or a router.
4. Reset Button	Resets the N4350. Pressing and holding the Reset button on the back for 1 seconds will reset your network setting and password, and turn off Jumbo Frame Support.
5. Power Connector	Connect the included power cords to this connector.
6. System Fan	System fan that exhausts heat from the unit.

Chapter 2: Hardware Installation

Overview

Your Thcus IP storage is designed for easy installation. To help you get started, the following chapter will help you quickly get your Thcus IP storage up and running. Please read it carefully to prevent damaging your unit during installation.

Before You Begin

Before you begin, be sure to take the following precautions:

1. Read and understand the **Safety Warnings** outlined in the beginning of the manual.
2. If possible, wear an anti-static wrist strap during installation to prevent static discharge from damaging the sensitive electronic components on the Thcus IP storage.
3. Be careful not to use magnetized screwdrivers around the Thcus IP storage's electronic components.

Cable Connections

To connect the Thcus IP storage product to your network, follow the steps below:

1. Connect an Ethernet cable from your network to the WAN/LAN1 port on the back panel of the Thcus IP storage.



▲ N2350/N4350
WAN/LAN1 port

2. Connect the provided power adaptor and power cord into the power socket on the back panel. Plug the other end of the cord into a surge protector socket.



▲ N2350 Series power socket



▲ N4350 Series power socket

3. Press the power button on the Front Panel to boot up the Thecus IP storage.



▲N4350 Series power button



▲N2350 Series power button

Chapter 3: First Time Setup

Overview

Once the hardware is installed, physically connected to your network, and powered on, you can configure the Thecus IP storage so that it is accessible to your network users. There are two ways to set up your Thecus IP storage: using the **Thecus Setup Wizard** or the **LCD display (Depend on models)**. Follow the steps below for initial software setup.

Thecus Setup Wizard

The handy Thecus Setup Wizard makes configuring Thecus IP storage a snap. To configure the Thecus IP storage using the Setup Wizard, perform the following steps:


1. Insert the installation CD into your CD-ROM drive (the host PC must be connected to the network).
2. The Setup Wizard should launch automatically. If not, please browse your CD-ROM drive and double click on **Setup.exe**.



NOTE

For MAC OS X users, double click on Thecus Setup Wizard .dmg file.


3. The Setup Wizard will start and automatically detect all Thecus storage devices on your network. If none are found, please check your connection and refer to [Chapter 7: Troubleshooting](#) for assistance.

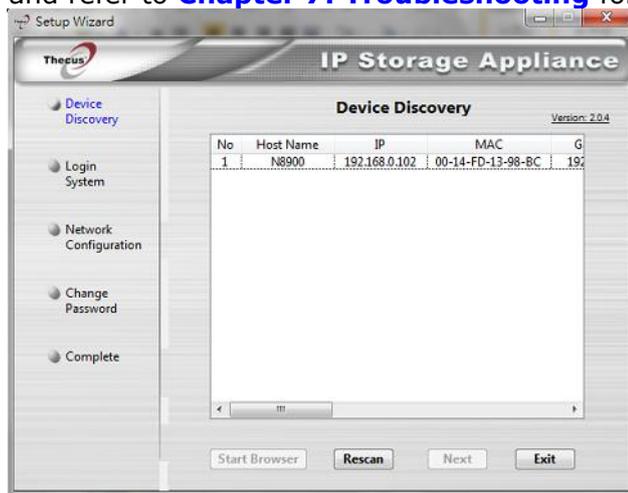


4. Select the Thecus IP storage that you like to configure.
5. Login with the administrator account and password. The default account and password are both "admin".



6. Name your Thecus IP storage and configure the network IP address. If your switch or router is configured as a DHCP Server, configuring the Thecus IP storage to automatically obtain an IP address is recommended. You may also use a static IP address and enter the DNS Server address manually.

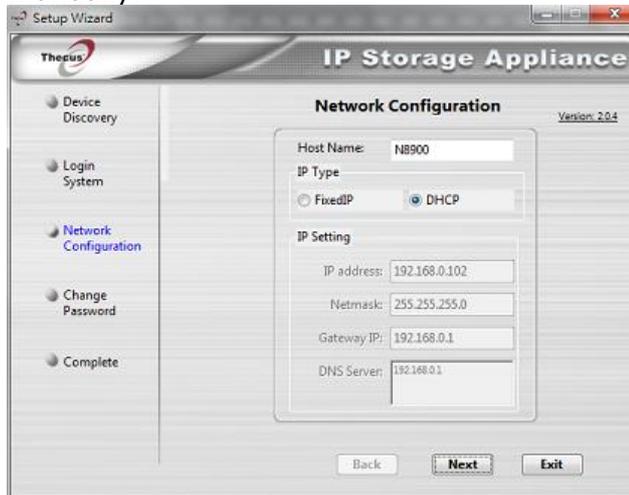

7. Change the default administrator password.

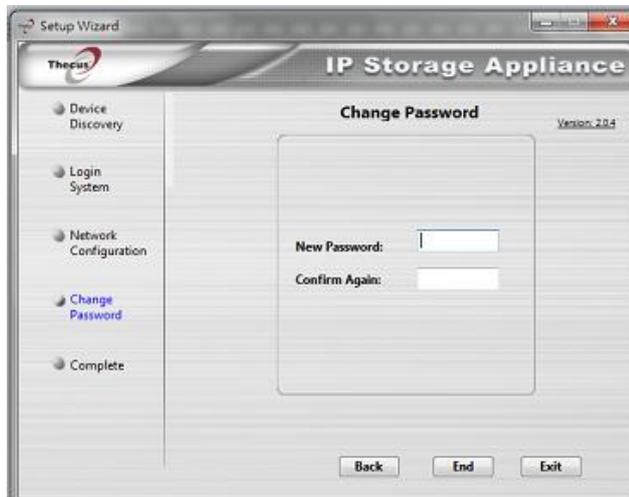

8. Finished! Access the Thecus IP storage Web Administrator Interface by pressing the **Start Browser** button. You can also configure another

Thecus IP storage at this point by clicking the **Setup Other Device** button. Press **Exit** to exit the wizard.



NOTE

The Thecus Setup Wizard is designed for installation on systems running Windows XP/2000/vista/7/8/10 or Mac OSX or later. Users with other operating systems will need to install the Thecus Setup Wizard on a host machine with one of these operating systems before using the unit.

Typical Setup Procedure

From the Web Administration Interface, you can begin to setup your Thecus IP storage for use on your network. Setting up the Thecus IP storage typically follows the five steps outlined below.

Step 1: Network Setup

From the Web Administration Interface, you can configure the network settings of the Thecus IP storage for your network. You can access the **Network** menu from the control panel.

Step 2: RAID Creation

Next, administrators can configure their preferred RAID setting and build their RAID volume. You can access RAID settings from the control panel of the Web Administration Interface by navigating to **Storage Management > Disk and RAID**.

Step 3: Create Local Users or Setup Authentication

Once the RAID is ready, you can begin to create local users for Thecus IP storage, or choose to setup authentication protocols such as Active Directory (AD).

Step 4: Create Folders and Set Up ACLs

Once users are introduced into your network, you can begin to create various folders on the Thecus IP storage and control user access to each using Folder Access Control Lists.

Step 5: Start Services

Finally, you can start to setup the different services of Thecus IP storage for the users on your network.

Chapter 4: System Administration


Overview

The Thecus IP storage provides an easily accessible **Web Administration Interface**. With it, you can configure and monitor the Thecus IP storage anywhere on the network.

Web Administration Interface

Make sure your network is connected to the Internet. To access Thecus IP storage **Web Administration Interface**:

1. Type the Thecus IP storage IP address into your browser. (Default IP address is `http://192.168.1.100`)

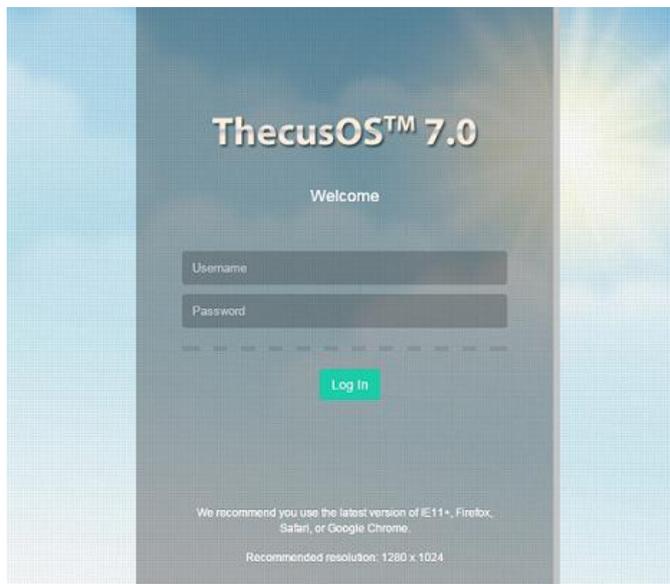

NOTE

Your computer's network IP address must be on the same subnet as the Thecus IP storage. If the Thecus IP storage has default IP address of 192.168.1.100, your managing PC IP address must be 192.168.1.x, where x is a number between 1 and 254, but not 100.

2. Login to the system using the administrator user name and password. The factory defaults are:

User Name: admin

Password: admin

- ※ If you changed your password in the setup wizard, use the new password.


Once you are logged in as an administrator, the disclaimer page will appear as below. Please click the check box if you do not want to have this page displayed during the next login.



Following the disclaimer page, you will see the **Web Administration Interface**. From here, you can configure and monitor virtually every aspect of the Thecus IP storage from anywhere on the network.

Menu Tree

The **Menu Tree** is where you will find all of the information screens and system settings of Thecus IP storage. The various settings are placed in the following groups on the menu bar.

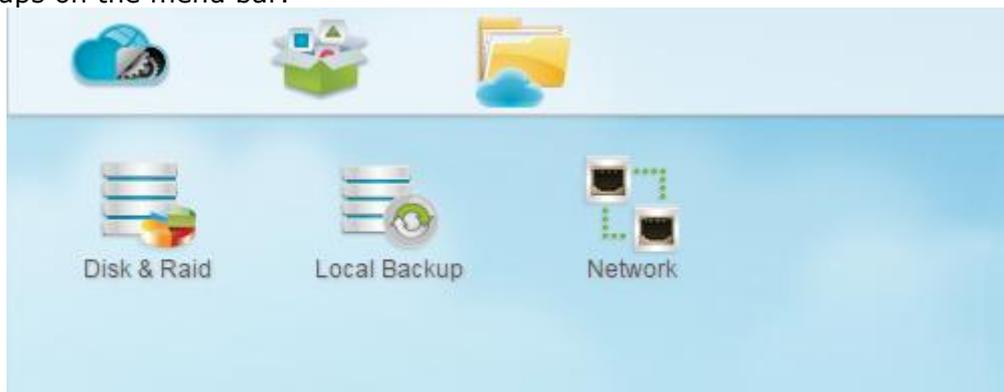


Menu Bar	
Item	Description
Control Panel	The Entry of system and function setting
App Center	The entry of App Center
File Center	The entry of File Center

Moving your cursor over any of these items and click, it will display the associated screen for each topic.

Add/Remove Shortcut


The user interface allows the user to designate often used items and have them display on the main screen area by add Shortcut. The figure below displays system favorite functions.

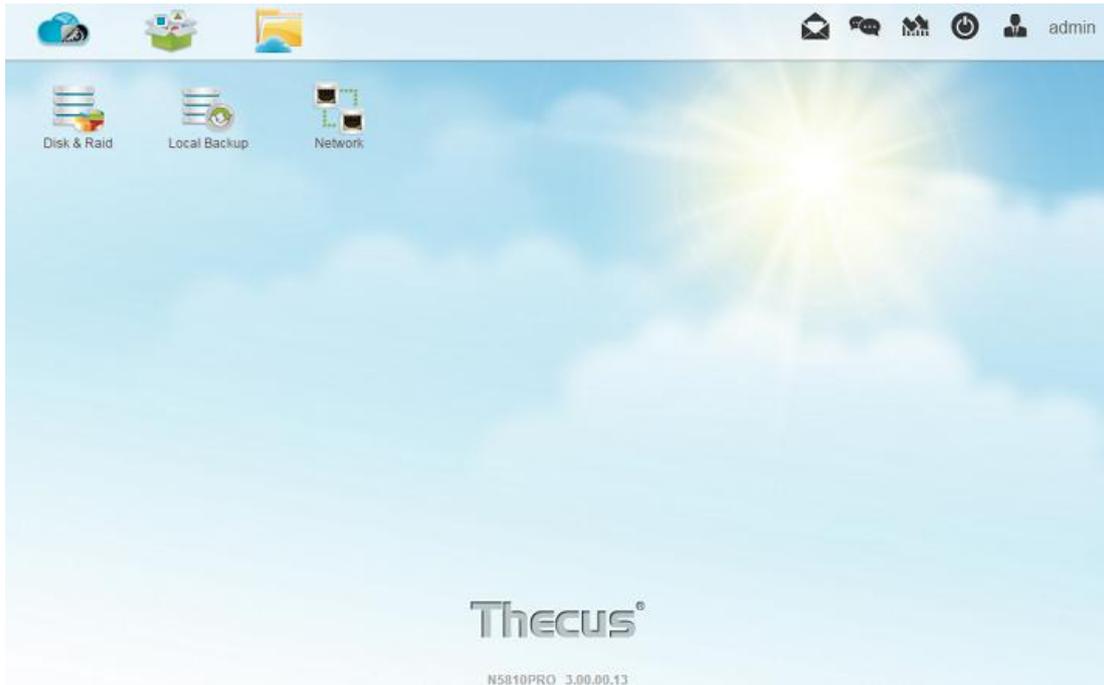

Administrators can add or remove Shortcut by right clicking the mouse and selecting "Add Shortcut" icon in each function screen. See the figure below with the red circled icon.




To remove "Shortcut" from main screen, right click the mouse button and select "Remove Shortcut".

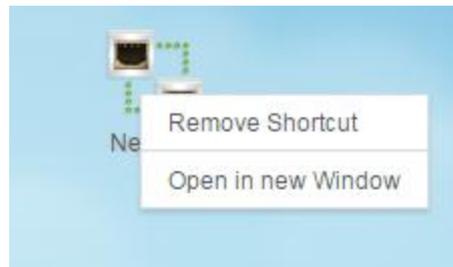

Open in New Window

To open associated function on the front of screen, right click mouse and select "Open in new window".

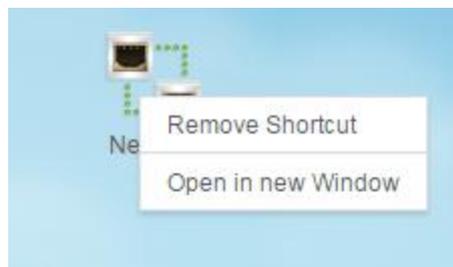


In the following sections, you will find detailed explanations of each function, and how to configure your Thecus IP storage.

Feedback for OS7.0

On the top right hand corner of menu bar, click on  and it will open the mail sending screen, please provide your feedback.

Quick System Log Info


On the top right hand corner of the menu bar, click on  and it will display the system log info.

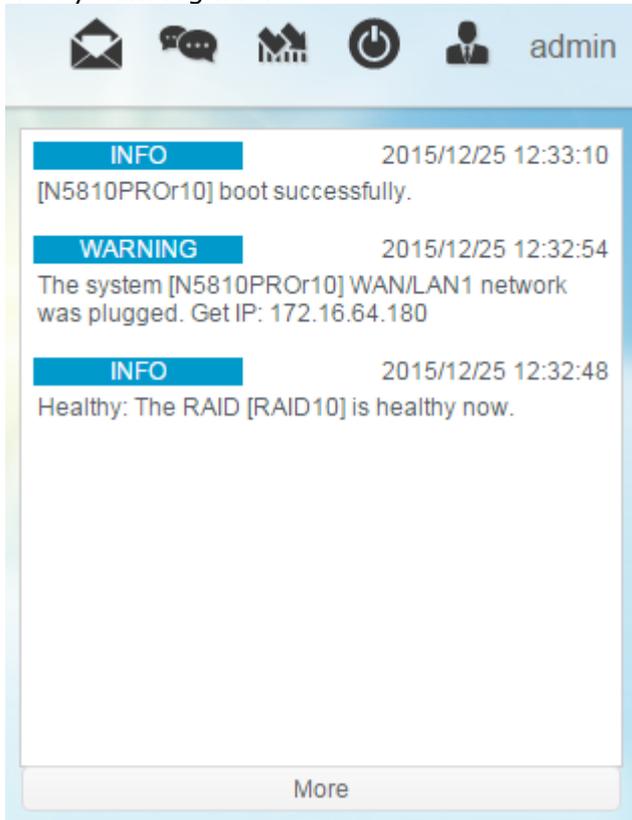

Quick System Resource Monitor

On the top right hand corner of the menu bar, click on  and it will display the

system resource monitor info such as CPU, memory and storage usage. .

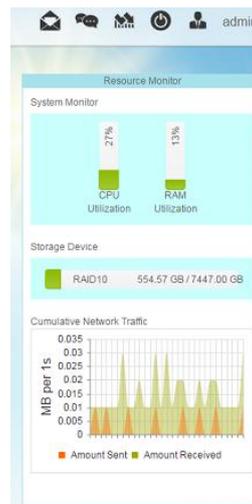

System shut down and reboot

On the top right hand corner of the menu bar, click on  this is a shortcut to shut down or reboot the system.



Language Selection


The Thecus IP storage supports multiple Languages, including:

- English
- Japanese
- Traditional Chinese
- Simplified Chinese
- French
- German
- Italian
- Korean
- Spanish
- Russian
- Polish
- Portuguese

On the top right hand corner of menu bar, select desired language from drop down list. This user interface will switch to the selected language for Thecus IP storage.




Logout

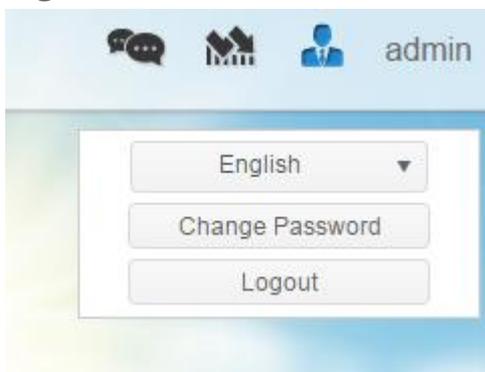

Click on logout to quit Web Administration Interface.

Change Password

On the top right hand corner of menu bar, select **Password** item and the **Change Password** screen will appear. Enter a new password in the **New Password** box and confirm your new password in the **Verify** box. Click on **Change** to confirm password changes.

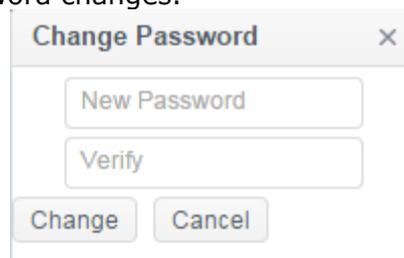

Thecus OS7.0 Web Interface Revision (FW v3.02.00 and after)

The user guide please refers to URL below.

http://www.thecus.com/download/manual/OS7/Thecus%20Web%20Interface%20Revision_FW%20v3.02.00_after%20v2.pdf

Control Panel

The control panel has 5 main categories: CONTROL, PRIVILEGE, STORAGE, SERVICES and BACKUP. Please see below for explanation.


CONTROL



Log and Notification

System Log

From the **Log & Notification** menu, choose the **System Log** option and the **System Log** screen will appear. This screen will show a history of system usage and important events such as disk status, network information, and system booting.

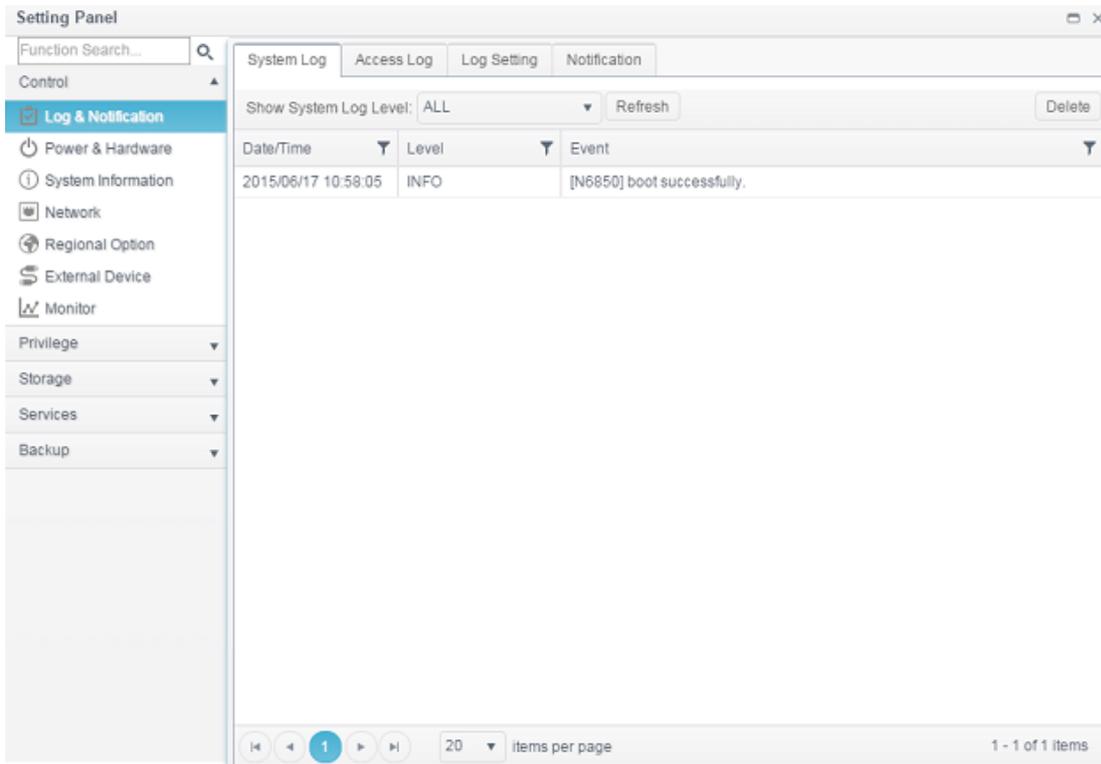


Logs	
Item	Description

Log Level	ALL: Provides all log information including system, warning, and error messages. WARN: Shows only warning messages. ERROR: Shows only error messages.
Delete	Clear all log files.
Items per page □	Specify the desired number of lines to display per page.
Filters	Input desired value to filter unwanted items
<< < > >>	Use the forward (> >>) and backward (<< <) buttons to browse through the log pages.
Refresh	Reload logs


Access Log

The **Access Log Support** section allows administrators to choose associated protocol and view user activity information.

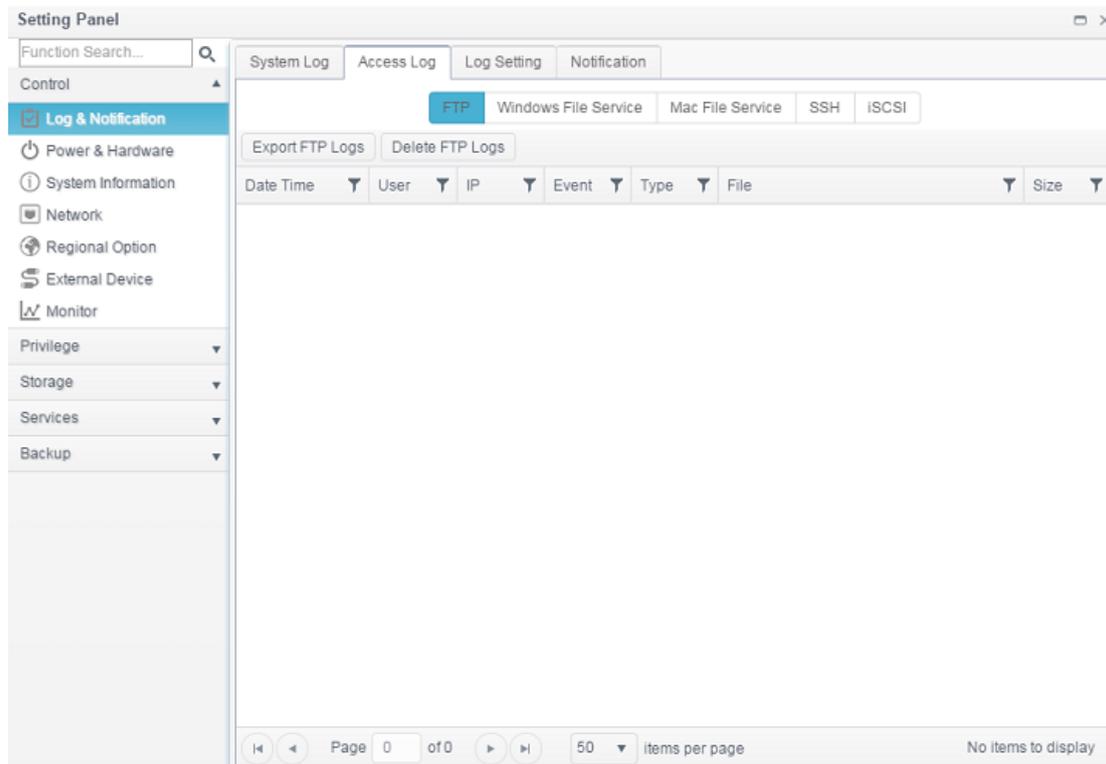


Log Setting

To have user access details for associated system, **Access Log Support** must be enabled and confirmed with "Apply" button, at the time all supported services will restart. To view Access Log details, please go to **Access Log** section.

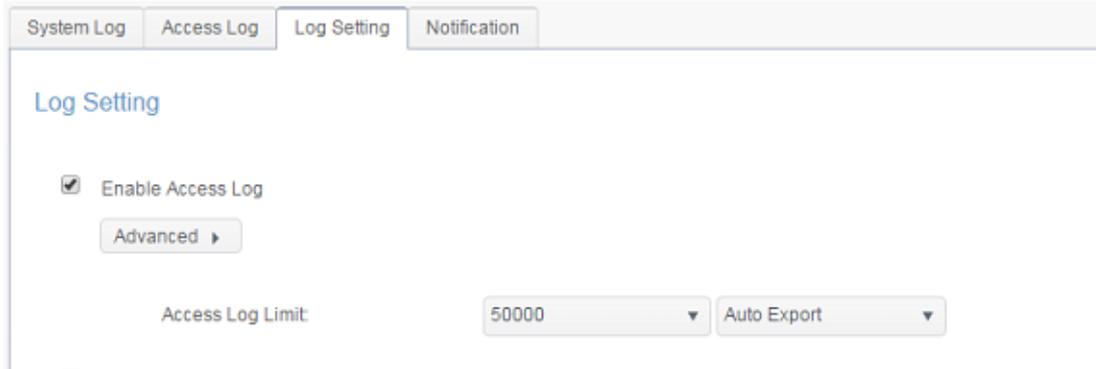


To export details from the User Access Log as a single file from target folder, administrators must first select the desired number of records from the dropdown list and also select the "Auto export" option. Please choose the number of logs to export and click **Apply** to activate these settings.

Once (for example) 10,000 records have been reached, the log file will appear in /NAS_public/access_log/

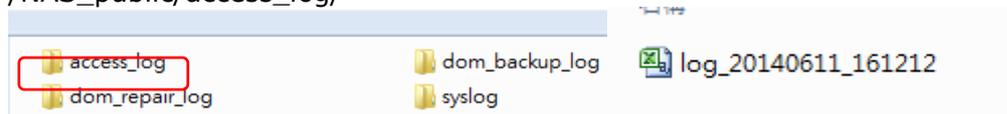

Syslog service can generate system logs to be stored locally or remotely. Information can be obtained in two ways: locally and remotely.

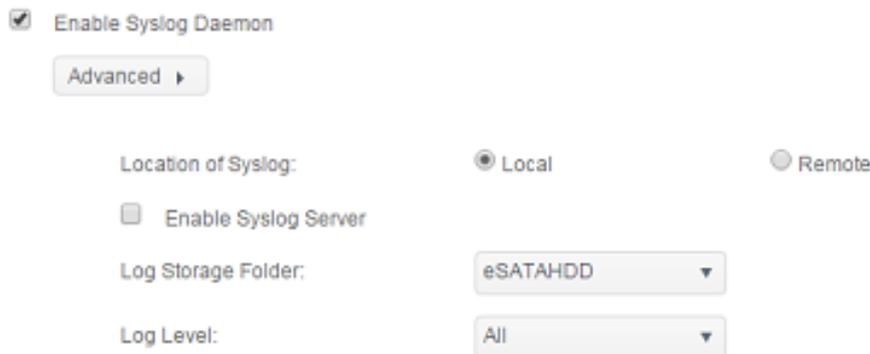

Log Setting	
Item	Description
Enable Access Log	Enable or disable the Access Log service.
Access log limit	This can be selected from a dropdown list to export the log(s) as a single file. Please also choose "Auto Export" or "Auto Delete" once the log item exceeded the defined number.
Enable Syslog Daemon	Enable or disable Syslog service.
Location of Syslog	Choose Local, all system logs will be stored in an associated syslog folder filled in from next filed. And the syslog folder will have file "messages" to store all system logs. If Remotely has been selected, a syslog server is needed and an IP address is required to fill in from next filed.
Enable Syslog Server	Checked to enable associated system can play a role as syslog server while syslog location has select "Local"
Log Server IP (Remote)	Input the remote syslog server IP address once syslog store in remote server has selected

Log storage folder (Local)	Select from a drop down share list, all of the system logs will be stored on it. This syslog folder is applied to "syslog server" or "syslog client" with "local" selected.
Log Level	The user can choose from 3 different levels. "All", "Warning/Error" or "Error".
Apply	Click Apply to save changes.
Description	The user access list will record different activities for supported protocols. 1. AFP: User login and logout. 2. FTP: User file deletion, uploads/downloads, folder creation, object renaming, and login and logout. 3. iSCSI: User login and logout. 4. Samba: User file deletion, folder creation, folder opening, and object reading, renaming, and writing. 5. SSH: User login and logout. 6. VPN: User login and logout

Notification

From log and notification, choose the **Notification** item, and the **Notification Configuration** screen will appear. This screen lets you have Thecus IP storage notify you in case of any system malfunction. Press **Apply** to confirm all settings. See following table for a detailed description of each item.


Notification Configuration	
Item	Description
Email Notification	Enable or disable email notifications of system problems.
Authentication Type	Select the SMTP Server account authentication type from drop down list.
Security Type	Select the security type while mail has sent out
SMTP Server	Specifies the hostname/IP address of the SMTP server.
Port	Specifies the port to send outgoing notification emails.
SMTP Account ID	Set the SMTP Server Email account ID.
Account Password	Enter a new password.
Log Level	Select the log level to send the e-mail out.

Sender's E-mail Address	Set senders email address to send email notifications.
HELO/EHLO Domain Name	Specified valid HELO/EHLO domain name
Receiver's E-mail Address (1,2,3,4)	Add one or more recipient's email addresses to receive email notifications.

NOTE

Consult with your mail server administrator for email server information.

Power & Hardware

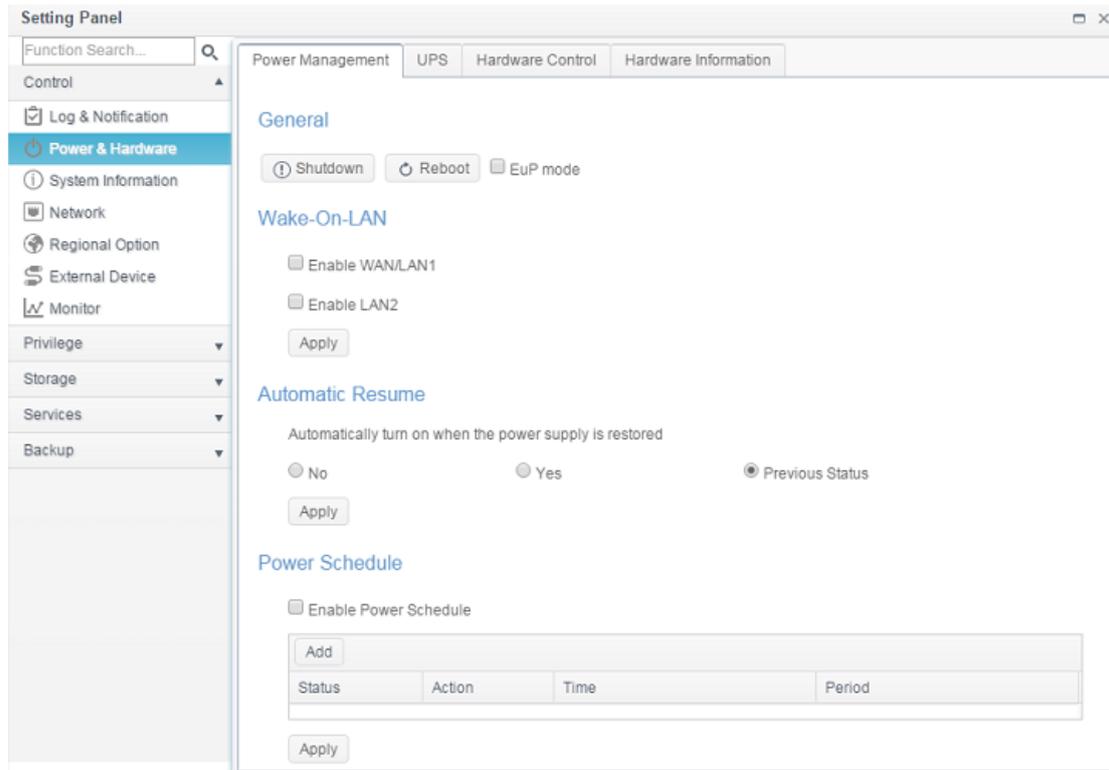

Power Management

General

Press **Reboot** to restart the system or **Shutdown** to turn the system off.

The option of **EuP mode** could help to lower system power consumption. However, once it has enabled the Wake-On-Lan, Power Schedule will be disabled automatically to meet Eup standard.



Automatic Resume

Thecus IP storage allows users to setup in 3 different modes while power cut resume.

Automatic Resume

Automatically turn on when the power supply is restored

No Yes Previous Status

Apply

Automatic Resume	
Item	Description
No	Choose No to keep system off after power cut resume
Yes	Choose Yes to have system on after power cut resume
Previous Status	Keep former state of system while power cut resume
Apply	Click Apply to save changes.

Power Schedule

Using the Thecus IP storage Power Management, you can save energy and money by scheduling the Thecus IP storage to turn itself on and off during certain times of the day.

To designate a schedule for the Thecus IP storage to turn on and off, first enable the feature by checking the **Enable Power Schedule** checkbox.

Then, click **Add** to add desired time for system power on or off.

Finally, click **Apply** to save your changes.

Power Schedule

Enable Power Schedule

Add			
Status	Action	Time	Period

Apply

Example - Monday: On: 8:00; Off: 16:00

System will turn on at 8:00 AM on Monday, and off at 16:00 on Monday. System will turn on for the rest of the week.

If you choose an on time, but do not assign an off time, the system will turn on and remain on until a scheduled off time is reached, or if the unit is shutdown manually.

Example - Monday: On: 8:00

System will turn on at 8:00 AM on Monday, and will not shut down unless powered down manually.

You may also choose two on times or two off times on a particular day, and the system will act accordingly.

Example - Monday: Off: 8:00; Off: 16:00

System will turn off at 8:00 AM on Monday. System will turn off at 16:00 PM on Monday, if it was on. If the system was already off at 16:00 PM on Monday, system will stay off.

Wake-On-LAN

The Thecus IP storage has the ability to be awoken from sleep mode via WAN/LAN1 or LAN2 port.




Click on associated NIC interface to **Enable** or **Disable Wake-On-LAN**.

Wake-up On LAN Configuration	
Item	Description
WAN/LAN1	Enable or Disable WOL service from WAN/LAN1
LAN2	Enable or Disable WOL service from LAN2
Apply	Click Apply to save changes.

UPS

Thecus IP storage supports **Uninterrupted Power Source** through USB interface. Make the changes of **UPS Setting** and press **Apply** to confirm changes.

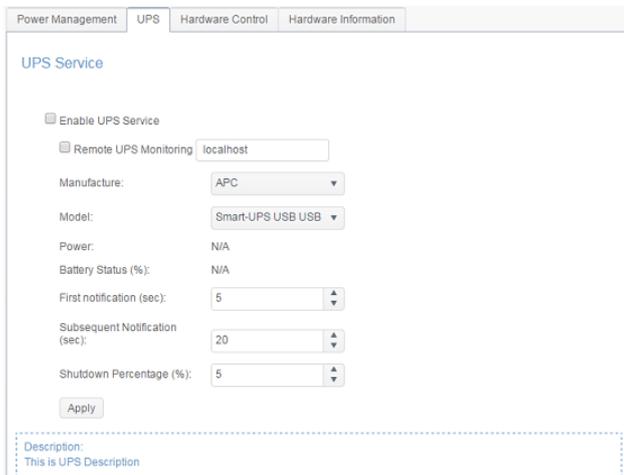

See the following table for a detailed description of each item.

UPS Setting	
Item	Description
UPS Service	Enable or disable UPS monitoring.
Remote UPS Monitoring	Checked to enable remote UPS monitoring. And input the IP address of the NAS that the UPS device is connected to via USB.
Manufacturer	Choose the UPS manufacturer from the dropdowns.

Model	Choose the UPS model number from the dropdowns.
Battery Status	Current status of the UPS battery
Power	Current status of the power being supplied to the UPS
First notification (sec)	Delay between power failure and first notification in seconds.
Subsequent notifications (sec)	Delay between subsequent notifications in seconds.
Shutdown percentage (%)	Amount of UPS battery remaining before system should auto-shutdown.
Apply	Press Apply to save your changes.

Hardware Control

The system buzzer can be **Enabled/Disabled** by clicking the check box. Check to enable system buzzer when any error occurs or disable to mute the system.

Power Management

UPS

Hardware Control

Hardware Information

Hardware Control

Enable Buzzer


Apply

Description:
This is description of Hardware Control.

System Information

System Status


This screen provides basic system status information.

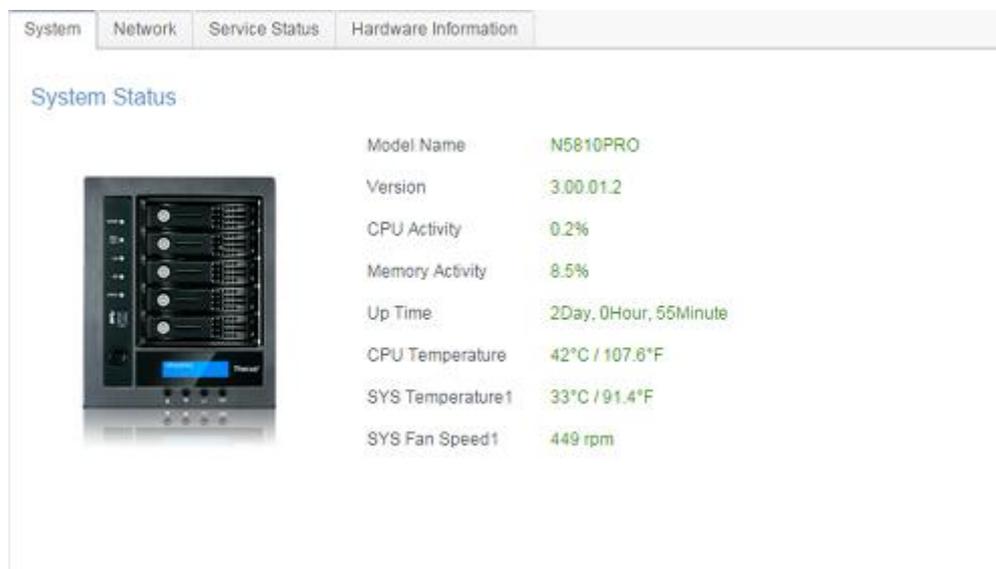

System Status	
Item	Description
Model	Model name
Version	Current FW version
CPU Activity	Displays current CPU workload of the Thecus IP storage.
Memory Activity	Display current memory workload of the Thecus IP storage
CPU Temperature	Displays current CPU Temperature.
System Temperature/1	Displays current System temperature from 2 positions
System Fan Speed	Displays the current status of the system fan.
Up Time	Shows how long the system has been up and running.

Network Status

This screen provides basic system network status and information.

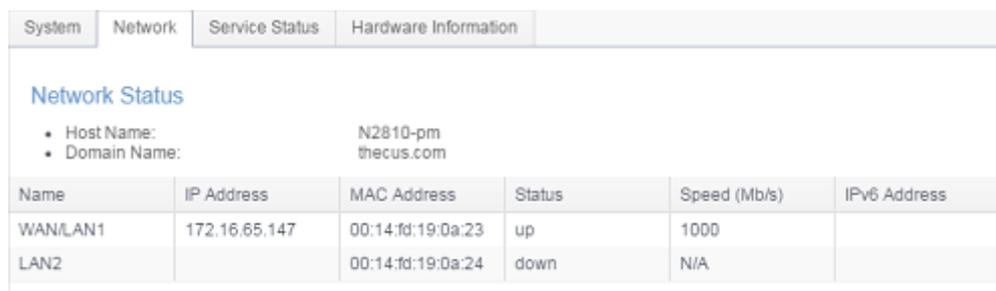


Network Information (Global parameter)	
Item	Description
Host name	Host name that identifies the Thecus IP storage on the network.
Domain name	Specifies the domain name of Thecus IP storage.
Link speed	Display associated NIC port link speed.
Link status	Display associated NIC port link status.
MAC address	MAC address of the network interface.
IPv4 IP address	IP address of associate NIC interface in IPv4.

IPv6 IP address

IP address of associate NIC interface in IPv6.

Service Status

This screen provides basic service status information.

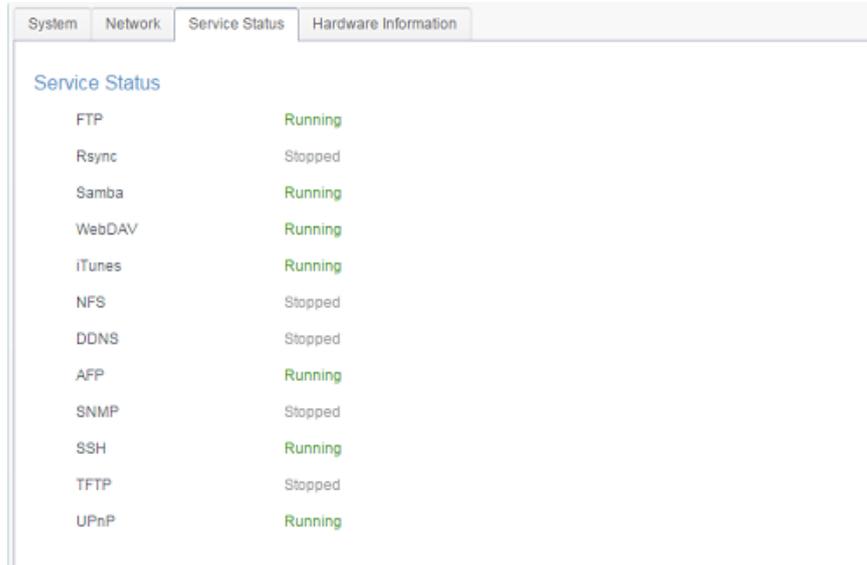

The screenshot shows a web interface with four tabs: System, Network, Service Status, and Hardware Information. The Service Status tab is active, displaying a list of services and their status. The status is indicated by the text 'Running' in green or 'Stopped' in black.

Service	Status
FTP	Running
Rsync	Stopped
Samba	Running
WebDAV	Running
iTunes	Running
NFS	Stopped
DDNS	Stopped
AFP	Running
SNMP	Stopped
SSH	Running
TFTP	Stopped
UPnP	Running

Service Status	
Item	Description
AFP Status	The status of the Apple Filing Protocol server.
NFS Status	The status of the Network File Service Server.
SMB/CIFS Status	The status of the SMB/CIFS server.
FTP Status	The status of the FTP server.
TFTP Status	The status of the TFTP server.
Rsync Status	The status of the Rsync server.
UPnP Status	The status of the UPnP service.
SNMP	The status of the SNMP service.

Hardware Information


Click on **Hardware Information**, this will display the related HW details for the associated model. Below is an example of the information for a Thecus N5810.

The screenshot shows a web interface with a navigation bar at the top containing tabs for 'System', 'Network', 'Service Status', and 'Hardware Information'. The 'Hardware Information' tab is selected. Below the navigation bar, the page title 'Hardware Information' is displayed in blue. The content is organized into several sections, each with a heading and a list of hardware components:

- CPU**
 - CPU1: Intel(R) Celeron(R) CPU J1900 @ 1.99GHz
 - CPU2: Intel(R) Celeron(R) CPU J1900 @ 1.99GHz
 - CPU3: Intel(R) Celeron(R) CPU J1900 @ 1.99GHz
 - CPU4: Intel(R) Celeron(R) CPU J1900 @ 1.99GHz
- Memory**
 - Memory Size: 7879MB
- Network Interface Card**
 - WAN/LAN1: Intel Corporation Device 1533 (rev 03)
 - LAN2: Intel Corporation Device 1533 (rev 03)
 - LAN3: Intel Corporation Device 1533 (rev 03)
 - LAN4: Intel Corporation Device 1533 (rev 03)
 - LAN5: Intel Corporation Device 1533 (rev 03)
- Universal Serial Bus**
 - USB2.0-1: Intel Corporation Device 0f35 (rev 0e)
 - USB3.0-1: Intel Corporation Device 0f35 (rev 0e)
 - USB2.0-2: Device 1b21:1142
 - USB3.0-2: Device 1b21:1142
- Disk Controller**
 - SATA1: Intel Corporation Device 0f23 (rev 0e)
 - SATA2: Device 1b4b:9215 (rev 11)

Network

From the **Control** menu, choose **Network**, and the **Networking Configuration** screen will appear. This screen displays the network parameters of the global setting and available network connection. You may change any of these items and press **Apply** to confirm your settings. See a description of each item in the following table:

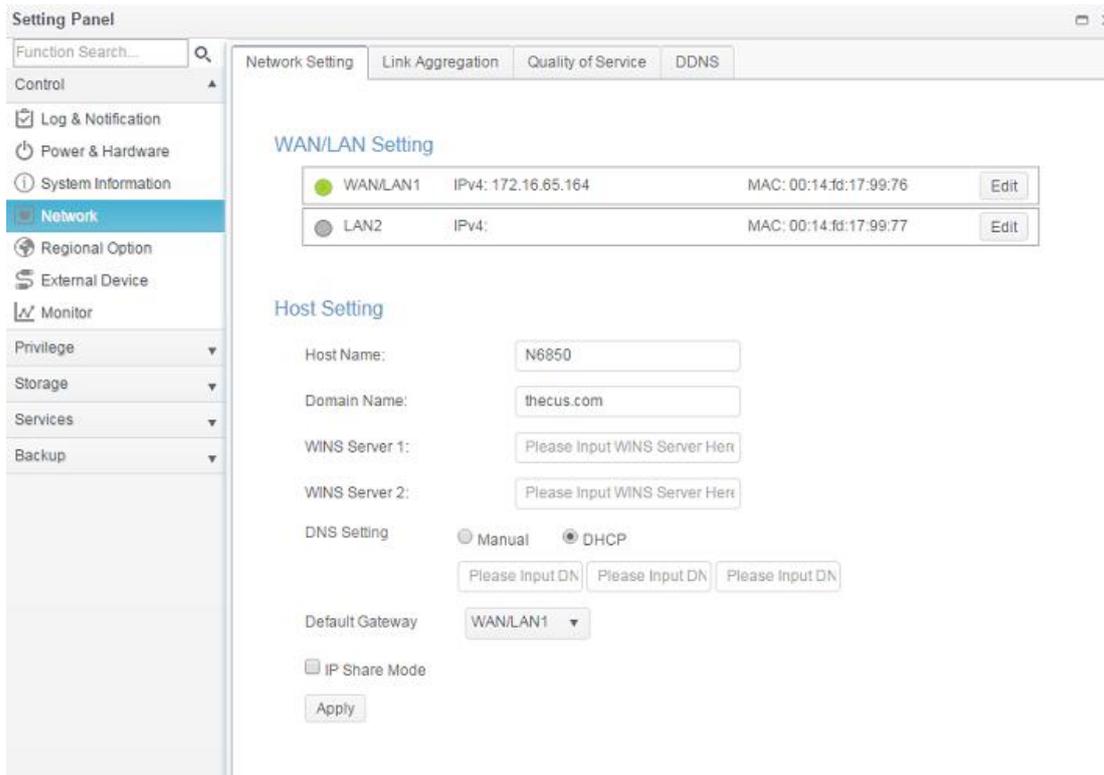


Network Setting

WAN/LAN Setting:

The available system network ports are coming from embedded system ports. Therefore, the screen shown above is an example of a Thecus N5810 with 2 on board GbE NIC.

To modify port setting, please click on **Edit** with the associated network port. The setting screen will appear, it can be configured for basic setting, DHCP server and VLAN.

Basic Setting:

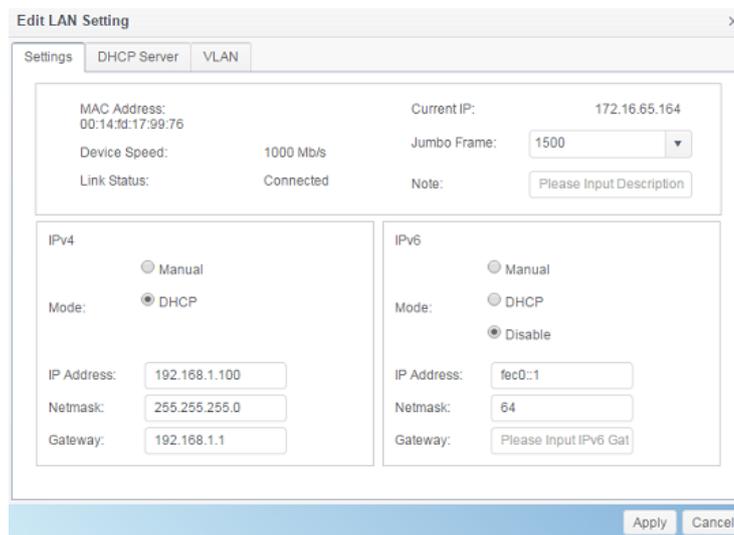

Basic Setting	
MAC address	MAC address of the network interface.
IP	IP address of associate NIC interface.
Device speed	Display associated NIC port link speed.
Link status	Display associated NIC port link status.
Jumbo Frame	Input Jumbo Frame rate from drop down list, default is 1500
Note	Input the description of associated network port if any
IPv4/IPv6	Setting IP address from manual input or DHCP server .
Mode	It can choose a static IP by manually input or Dynamic IP from DHCP server.
IP address	Input IP address if manually input has selected or displayed by granted from DHCP server
Netmask	Input netmask if manually input has selected or displayed by granted from DHCP server
Gateway	Input gateway if manually input has selected or displayed by granted from DHCP server

NOTE

- Only use Jumbo Frame settings when operating in a Gigabit environment where all other clients have Jumbo Frame Setting enabled.
- Proper DNS setting is vital to networks services, such as SMTP and NTP.

WARNING

Most faster Ethernet (10/100) Switches/Routers do not support Jumbo Frame and will not be able to connect to your Thcus NAS after Jumbo Frame is turned on.

DHCP Server:

The network port of Thcus IP storage can be acted as DHCP server if associated NIC has been set-up to a static IP. Please fill in the fields to complete setting.

DHCP Configuration	
Item	Description
Enable IPv4/IPv6 DHCP Server	Enable or disable the IPv4/IPv6 DHCP Server to automatically assign IP address to PCs connected to associate NIC interface.
Start IP (IPv4)	Specifies the lower IP address of the DHCP range.
End IP in (IPv4)	Specifies the highest IP address of the DHCP range.


Netmask(IPv4)	Specifies netmask for the DHCP server service.
Default Gateway (IPv4)	Specifies gateway for the DHCP server service.
DNS Server 1,2,3 (IPv4)	Displayed the DNS server IP address.
Prefix (IPv6)	Specifies prefix
Prefix Length (IPv6)	Specifies prefix length

WARNING

The IP address of associated NIC should not be in the range of the Start IP address and End IP address (IPv4).

VLAN:

Each NIC is capable of VLAN support. To enable VLAN, simply click the check box and input the VLAN ID (VLAN ID can be any digital number). The system with the same VLAN ID will become a Virtual LAN group to allow more specific communication among members.

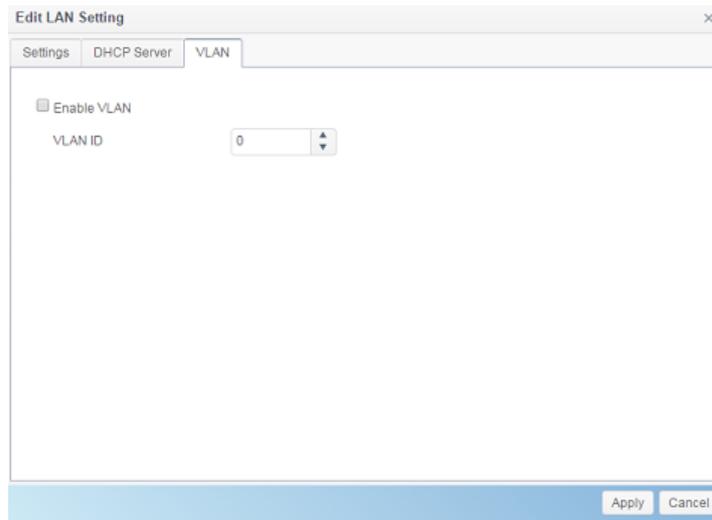

Quality of Service

Thecus IP storage is capable for QoS (Quality of Service) by supported services. The bandwidth will give by the order from QoS list once the overall bandwidth required is larger than the physical number.



Quality of Service (QoS)

Enable QoS

Add						
Ena...	Network Interface	Service	Protocol	Ports	Guaranteed (K...	Maximum (KB/s)
Yes	WAN/LAN1	Samba	TCP	139,445	50000	1000000
Yes	WAN/LAN1	AFP	TCP	548	3000	500000

Apply

Description:
This is description of Quality of Service.

To setup QoS, simply Enable QoS and then click 'Add' on QoS screen. The screen will appear as below.

Quality of Service Configuration	
Enable the Rule	Checked the box to enable defined rule.
Network Interface	Select network interface from drop down list.
Service List	Select desired service to have QoS served
User Defined	Other than pre-defined service list, user defined service is allowed.
Service Name	Input user defined service name
Protocol and Ports	Input user defined protocol from drop down list and associated ports will be used
Protocol	List associated protocol of selected service.
Ports	List associated port number of selected service.
Guaranteed (KB/s)	Input MUST of throughput for associated service.
Maximum (KB/s)	Input maximum of throughput for associated service

To modify, delete or change priority of created QoS service, select desired service from service list then click required activities. Carry on for necessary modification to modify by click "Edit" or click on "Move Up" or "Move Down" to change priority. The Delete the rule button can be found on left hand bottom corner after go into "Edit" screen.

Quality of Service (QoS)

Enable QoS

<input type="button" value="Add"/> <input type="button" value="Edit"/> <input type="button" value="Move Up"/> <input type="button" value="Move Down"/>						
Ena...	Network Interface	Service	Protocol	Ports	Guaranteed (K...	Maximum (KB/s)
Yes	WAN/LAN1	Samba	TCP	139,445	50000	1000000
Yes	WAN/LAN1	AFP	TCP	548	3000	500000

DDNS

DDNS Support:

To set up a server on the Internet and enable the users to connect to it easily, a fixed and easy-to-remember host name is often required. However, if the ISP provides only dynamic IP address, the IP address of the server will change from time to time and is difficult to recall. You can enable the DDNS service to solve the problem.

After enabling the DDNS service of the NAS, whenever the NAS restarts or the IP address is changed, the NAS will notify the DDNS provider immediately to record the new IP address. When the user tries to connect to the NAS by the host name, the DDNS will transfer the recorded IP address to the user.

The NAS supports the DDNS providers:

DyDNS.org(Dynamic DNS),DyDNS.org(Custom DNS),DyDNS.org(Static DNS),
www.zoneedit.com,www.no-ip.com.

A description for each item as following:

DDNS	
Item	Description
DDNS Service	Enable or disable DDNS service.
Register	Choose the service provider from the drop down list
User name	Input user name with DDNS registry.
Password	Input password with DDNS registry.
Domain name	Input domain name with DDNS registry.
Apply	Click "Apply" to confirm the changes.

DDNS Support

Enable DDNS Support

Register: DynDNS.org (Dynamic DNS) ▼

User Name:

Password:

Domain Name:

Regional Option

Date/Time

From the **Regional Option** menu, choose the **Date/Time** item and the **Time Settings** screen appears. Set the desired **Date**, **Time**, and **Time Zone**. You can also elect to synchronize the system time on Thcus IP storage with an **NTP (Network Time Protocol) Server**.

Function Search...

Control

- Log & Notification
- Power & Hardware
- System Information
- Network
- Regional Option**
- External Device
- Monitor
- Privilege
- Storage
- Services
- Backup

Date / Time | Language | NTP Service

Time Setting

System Time: 2015/07/08 18:48

Time Zone: GMT+8 ▼

Sync with NTP Server
clock.isc.org ▼

Manually

Date: 2015/07/08

Time: 18 : 44

Description:
This is description of Data / Time.

See the following table for a detailed description of each item:

Time	
Item	Description
System Time	The current system date and time
Time Zone	Sets the system time zone.
Sync with NTP Server	Select NTP server from drop down list to sync up system time
Date	Sets the system date manually.
Time	Sets the system time manually.
Apply	Click Apply to save changes.

WARNING

If an NTP server is selected, please make sure your Thcus IP storage has been setup to access the NTP server.

NTP Service

The Thecus IP storage can also provide NTP service. You can also elect to synchronize the system time on Thecus IP storage with an **NTP (Network Time Protocol) Server**. To do this, simply click on NTP service button to enable it.

Date / Time	Language	NTP Service
-------------	----------	-------------

NTP Service

Enable NTP Service

Apply

Description:
NTP service allow other devices to sync with this NAS machine.

External Device

External HDD


From the **External Devices** menu, choose the **External HDD**, and the **External HDD** screen will appear. This screen provides the information about the external HDDs have connected to this system.



Device Type	Model	Device Capacity	Firmware Version
USB	Transcend 8GB	7 GB	8.07
USB	USB Flash Disk	3 GB	0.00

Printer

From the **External Devices** menu, choose the **Printer** item, and the **Printer Information** screen will appear. This screen provides the following information about the USB printer connected to the USB port.

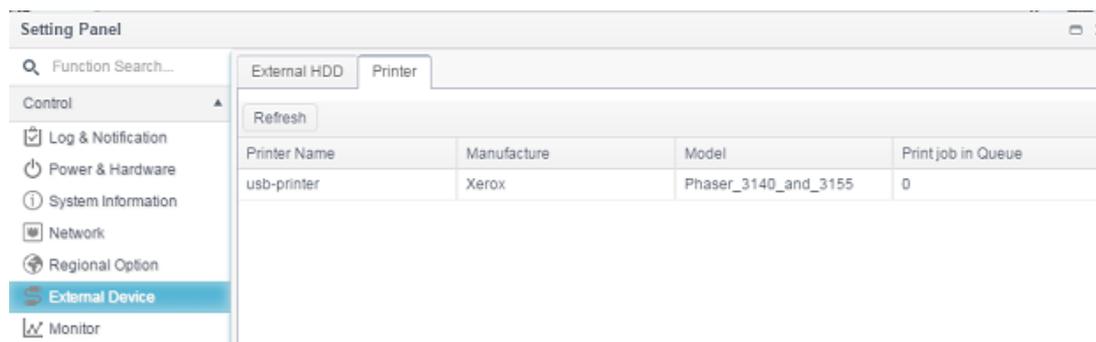

Printer Name	Manufacture	Model	Print job in Queue
usb-printer	Xerox	Phaser_3140_and_3155	0

Printer Information	
Item	Description
Printer Name	The default is usb-printer. It can be changed by select printer then click on Edit to modify it.
Manufacturer	Displays the name of the USB printer manufacturer.
Model	Displays the model of the USB printer.
Printer job in Queue	Displays the print job in queue of the USB printer.

You can configure Thecus IP storage to act as a printer server. That way, all PCs connected to the network can utilize the same printer.

NOTE

- For example to setup attached USB printer on your Windows 7 environment. Please use <http://<NAS IP address>:631/printers/printer name> The default printer name is usb-printer or use the one has been

Monitor

The system monitor is capable to monitor system status including CPU, memory, hard disk and network.

To monitor system status, simply click on tab of associated item and the screen will appear accordingly.

CPU




Memory



Hard Disk



Network

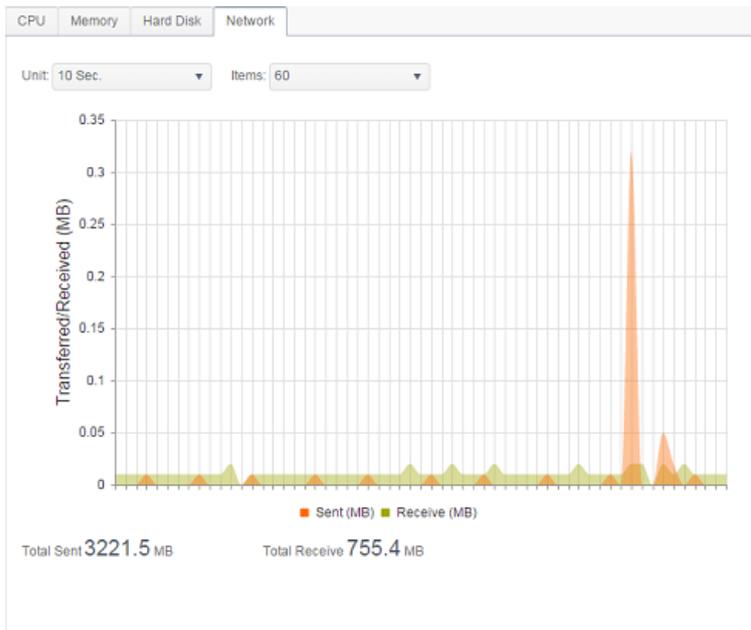

Firmware Setting

Firmware Setting

From the menu, choose the **Firmware Setting** item and the **Firmware Setting** screen appears.

Firmware Upgrade

Please select the upgraded firmware file:

drop files here to upload

Follow the steps below to upgrade your firmware:

1. Click the **Select** button to find the firmware file.
2. System will check correctness of selected file and carry on for upgrade process .
3. The buzzer will beep and the Busy LED will blink until the upgrade is complete.

NOTE

- Check Thecus website for the latest firmware release and release notes.
- Downgrading firmware is not permitted.

WARNING

Do not turn off the system during the firmware upgrade process.
This will lead to a catastrophic result that may render the system inoperable.

Configuration Management

The **System Configuration Management** is to let you to download or upload stored system configurations.

Configuration Management

Please select the restored configuration file:

drop files here to upload

See the following table for a detailed description of each item.

System Configuration Management	
Item	Description
Backup	Save and export the current system configuration.
Select	Import a saved configuration file to overwrite the current system configuration.

NOTE

Backing up your system configuration is a great way to ensure that you can revert to a working configuration when you are experimenting with new system settings.
The system configuration you have backed up can only be restored in the same firmware version. The backup details exclude user/group accounts.

Automatic Upgrade

The system is defaulted to enable **Major** upgrade mode for any MUST update. It also provides the option for **Latest** upgrade mode, which has **Major** upgrade included but also most updated fixes and latest functions.

Click on **Check Upgrade Now** can let you find out the latest FW version.

Automatic Upgrade

Automatically upgrade firmware when new version is available.

Major Latest

Reset to Default

In any case the system needs to set back to factory default, click on **Apply** on **Reset to Default** section to reset Thecus IP storage to factory default settings.

Reset to Default

WARNING


Resetting to factory defaults will not erase the data stored in the hard disks, but WILL revert all the settings to the factory default values.

PRIVILEGE



Share Folder

From the **PRIVILEGE** menu, choose **Share Folder**, and the **Shared Folder** screen will appear. This screen allows you to create and configure folders on the Thecus IP storage volume.

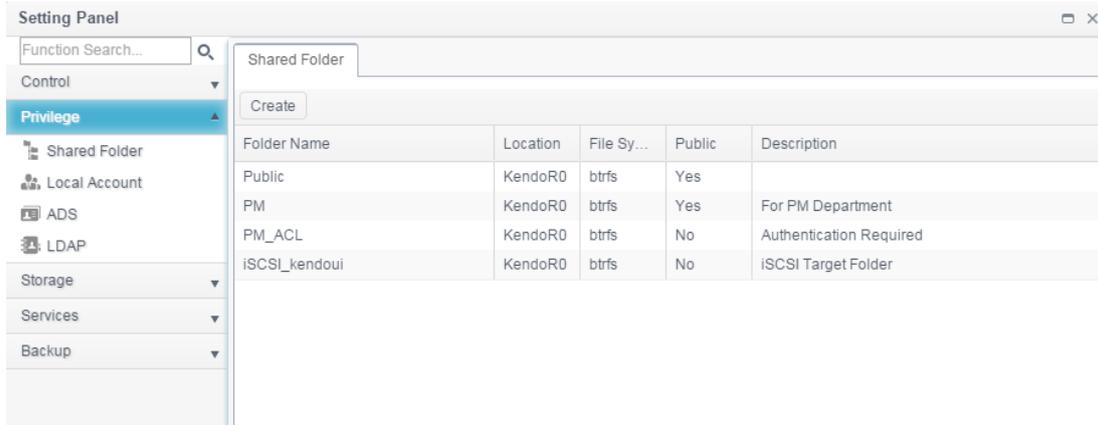


Adding Folders

On the **Shared Folder** screen, click on the **Create** button and the **Create Folder** screen appears. There are four sub-items related folder creation setting. Please fill in necessary information then press **Apply** to complete folder creation.

General Settings:

Please input required information to complete general setting of folder creation.

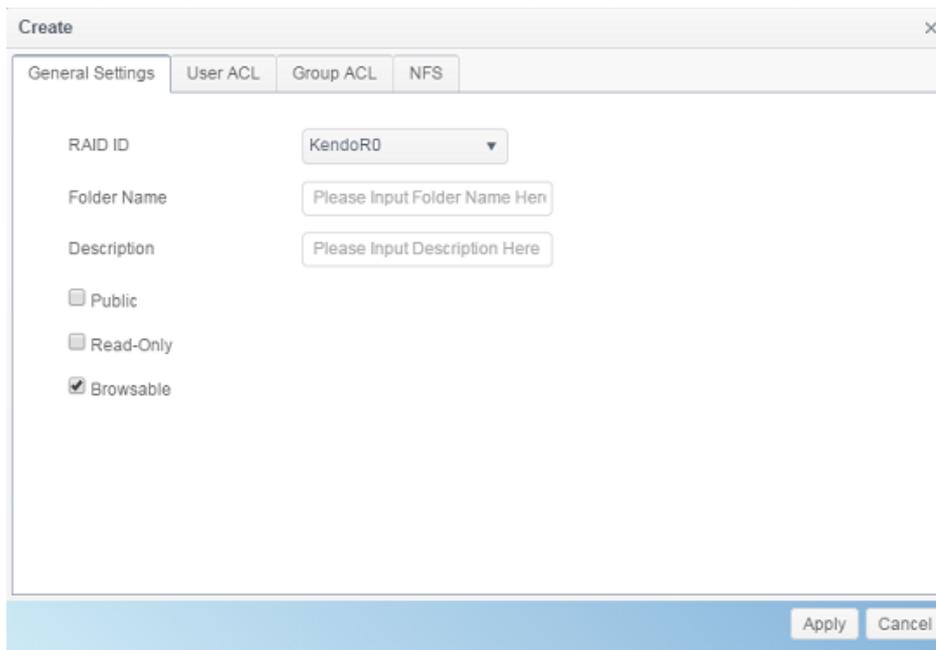


Add Folder	
Item	Description
RAID ID	RAID volume where the new folder will reside.
Folder Name	Enter the name of the folder.
Description	Provide a description the folder.
Browseable	Enable or disable users from browsing the folder contents. If Yes is selected, then the share folder will be browseable.
Public	Admit or deny public access to this folder. If Yes is selected, then users do not need to have access permission to write to this folder. When accessing a public folder via FTP, the behavior is similar to anonymous FTP. Anonymous users can upload/download a file to the folder, but they cannot delete a file from the folder.
Read Only	Define only allowed to read from associate but not write into.

Apply	Press Apply to create the folder.
-------	--

NOTE Folder names are limited to 60 characters. Systems running Windows 98 or earlier may not support file names longer than 15 characters.

User ACL:

On the Folder Create screen, press the **User ACL** button, and the **User ACL setting** screen will appear. This screen allows you to configure access to the specific folder for users. From the left hand column user lists then choose **Deny**, **Read Only**, or **Writable** to configure their access level. Press the **Apply** button to confirm your settings.

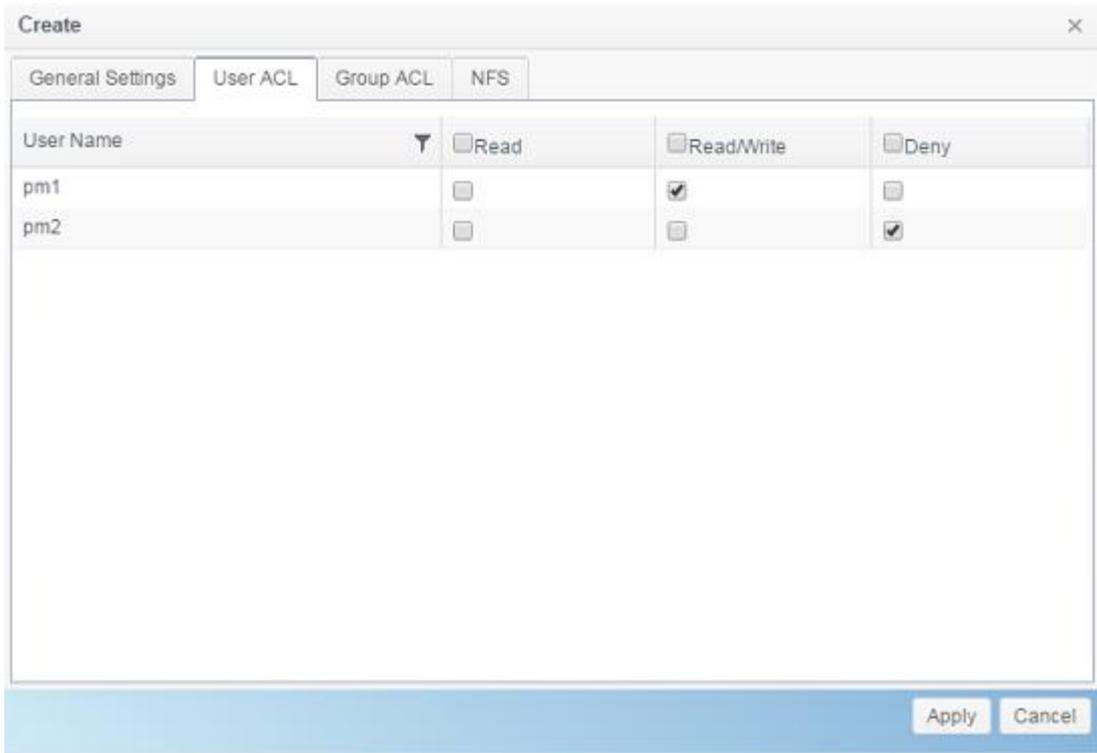

User ACL setting	
Item	Description
Deny	Denies access to users who are displayed in this column.
Read Only	Provides Read Only access to users who are displayed in this column.
Writable	Provides Write access to users who are displayed in this column.

Group ACL:

On the Folder Create screen, press the **Group ACL** button, and the **Group ACL setting** screen appears. This screen allows you to configure access to the specific folder for groups. From the left hand column group lists then choose **Deny**, **Read Only**, or **Writable** to configure their access level. Press the **Apply** button to confirm your settings.

×
Create

General Settings
User ACL
Group ACL
NFS

Group Name	<input type="checkbox"/> Read	<input type="checkbox"/> Read/Write	<input type="checkbox"/> Deny
users	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
PMTeam	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>

Apply Cancel

Group ACL setting	
Item	Description
Deny	Denies access to groups who are displayed in this column.
Read Only	Provides Read Only access to groups who are displayed in this column.
Writable	Provides Write access to groups who are displayed in this column.

NOTE

If one user has belonged to more than one group with different privilege, then the priority of the privilege will be as followed:
Deny > Read Only > Writable

NFS:

To allow NFS access to the share folder, enable the **NFS Service**, and then set up hosts with access rights as well as related options.

NFS Share	
Item	Description
Hostname	Enter the name or IP address of the host
Privilege	Host has either read only or writeable access to the folder.
OS Support	There are two selections available: <ul style="list-style-type: none"> • Unix / Linux System • AIX (Allow source port > 1024) Choose the one which best fits your needs.
ID Mapping	There are three selections available: <ul style="list-style-type: none"> • Guest system root account will have full access to this share (root:root). • Guest system root account will be mapped to anonymous user (nobody:nogroup) on NAS. • All user on guest system will be mapped to anonymous user (nobody:nogroup) on NAS. Choose the one which best fits your needs.
Sync / Async	Choose to determine the data "Sync" at once or "Async" in arranged batch.
Apply	Click to save your changes.

Modify/Remove Folders

On the existed **Folder** list, click on desired **Folder** then the associated menu items will appear.

Shared Folder				
Folder Name	Location	File Sy...	Public	Description
Public	KendoR0	btrfs	Yes	
PM	KendoR0	btrfs	Yes	For PM Department
PM_ACL	KendoR0	btrfs	No	Authentication Required
iSCSI_kendoui	KendoR0	btrfs	No	iSCSI Target Folder

NOTE

The Snapshot item will appear only if:

3. The system RAID volume is selected btrfs file system.
4. The folder is user created not system default.

Edit & ACL:

Click on the **Edit & ACL** buttons, there are five sub-items related folder modification that can be choose if the associated folder has ACL defined. Or ACL related tabs won't appear and it is known as public folder.

General Settings:

The only item can't be changed is folder belonging with associated RAID volume. With others, make any changes if required.

RAID ID: KendoR0

Folder Name: PM_ACL

Description: Modify as required

Public

Read-Only

Browsible


User ACL (ACL folder only):

It is allowed to change access user list of associated folder.

User Name	<input type="checkbox"/> Read	<input type="checkbox"/> Read/Write	<input type="checkbox"/> Deny
pm1	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>
pm2	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>


Group ACL (ACL folder only):

It is allowed to change access group list of associated folder.

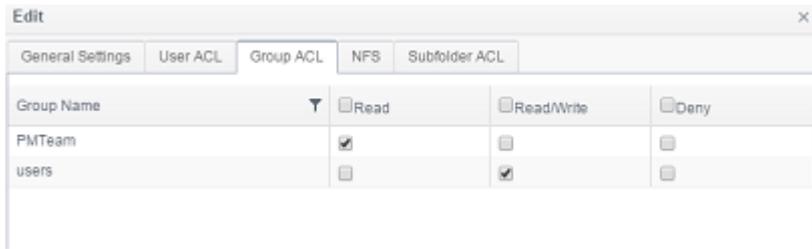

NFS:

It is allowed to change the existing NFS access setting or create a new one. To modify existing setting, click on from list then press Edit tab,

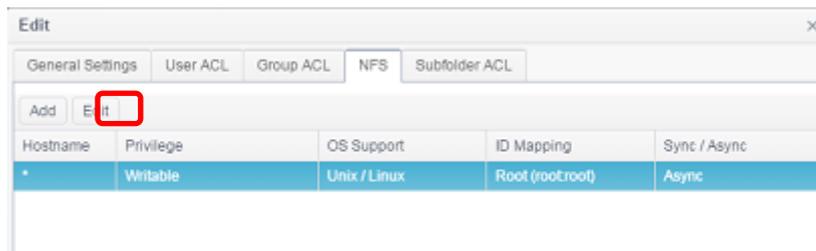


Or click on Add tab to create new access setting.

Subfolder ACL:

Other than folder level access control support, Thecus IP storage is capable for sub-folder ACL. To setup sub-folders ACL, click on **Subfolder ACL** tab and screen shows as below.

The left hand pane is the subfolders list for the associated parent folder. Click on desired subfolder and the right hand pane will appear and have system's user and group. Make necessary changes for user or group access right of associated subfolder. Please do remember to click on **Save ACL** tab once setting completed.

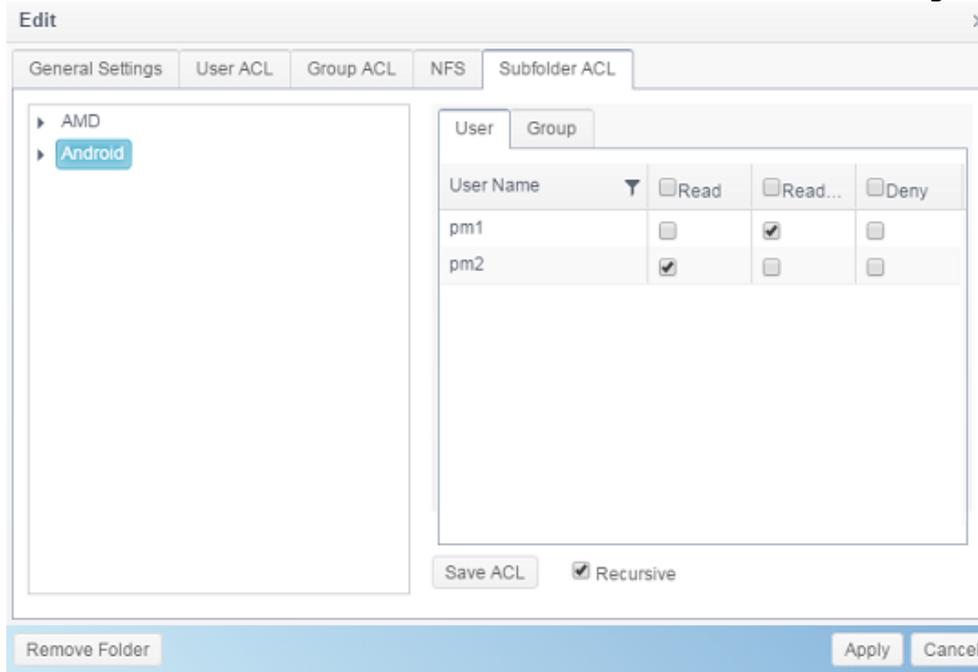

NOTE

The ACL can only be set for share and sub-folders level, not for files.

Remove Folder:

Click on Remove Folder tab and associated folder will be deleted from system.

The screenshot shows a dialog box titled "Edit" with a close button (X) in the top right corner. It has five tabs: "General Settings", "User ACL", "Group ACL", "NFS", and "Subfolder ACL". The "General Settings" tab is selected. The dialog contains the following fields and options:

- RAID ID: KendoR0
- Folder Name: PM_ACL
- Description: Modify as required
- Public:
- Read-Only:
- Browsable:

At the bottom of the dialog, there is a "Remove Folder" button on the left, and "Apply" and "Cancel" buttons on the right.

WARNING

All the data stored in the folder will be deleted once the folder is deleted. The data will not be recoverable.

Local Account

The Thecus IP storage has built-in user database that allows administrators to manage user access using different group policies. From the **Privilege** menu of **Local Account**, you can create, modify, and delete users, and assign them to groups that you designate.

User ID	User Name	Description	Admin	Last Login	User Quota	User Type
1000	pm1		No	2015-07-20 17:57:17.025695	--	Local User
1001	pm2		No	2015-07-20 17:57:17.438933	--	Local User
1002	pm4	PM team member	No	2015-07-24 18:18:14.091975	--	Local User
1003	pm3	PM Team Member	No	2015-07-24 17:43:25.203073	100.0 GB	Local User
1004	pm5	PM team member	No	2015-07-24 18:18:14.682774	1000.0 MB	Local User
1005	pm6	PM team member	No	2015-07-24 18:18:15.273130	10.0 GB	Local User

User

From the **Local Account** menu, choose the **User** item, and the **Local User Configuration** screen appears. This screen allows you to **Add, Edit, Remove** and **Batch Input** local users.

User ID	User Name	Description	Admin	Last Login	User Quota	User Type
1000	pm1		No	2015-07-20 17:57:17.025695	--	Local User
1001	pm2		No	2015-07-20 17:57:17.438933	--	Local User

Local User Configuration	
Item	Description
Refresh	Press Refresh to reload user list
Create	Press the Create button to add a user to the list of local users.
Edit	Press the Edit button to modify a local user.
Batch Input	Press the Batch Input button and associated screen appear to allow using batch input of local users.

Create User:

On the **User** screen, press the **Create** button and the **Create User** screen appears. Follow the wizard and system will lead you to complete the setting.

1. Enter a **User ID** number or leave it to use the system default value.
2. Tick on check box if this can be acted as administrator.
3. On the **Account ID** field, enter a name for the **User**.
4. Enter a **User ID** number or leave blank to use the system default value.
5. Enter a password in the **Password** box and re-enter the password in the **Confirm** box.
6. Input the user description
7. Input user's mail address
8. Input user quota or leave it as default for no limitation.
9. Press the **Next** button to next page.

User Information
Fill the fields for basic user information.

User ID: 1002 Set this user as administrator

*Account ID: pm3

*Password: ****

*Confirm Password: ****

Description: PM Team Member

Email: pm3@thecus.com

User Quota: 100 GB

Next Cancel

1. Select which group the user will belong to. **Group Members** is a list of groups this user belongs to.
2. Press the **Next** button to next page.

Groups
Select Groups to join.

<input type="checkbox"/>	Group ID	Group Name
<input checked="" type="checkbox"/>	100	users
<input checked="" type="checkbox"/>	101	PMTeam

Previous Next Cancel

1. Set the access right for ACL folders.
2. Checked "Recursive" box if it will apply to all subfolders
3. Press the **Next** button go to next page.

Folder Access Permission (ACL)

Set the access permission to shared folders.

Folder Name	<input type="checkbox"/> Read	<input type="checkbox"/> Read/Write	<input type="checkbox"/> Deny
PM_ACL	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>
ISCSI_kendoul	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>

Recursive

Previous Next Cancel

1. The page has listed user's information for double check.
2. Press the **Create** button and the user is created.

Confirm User Settings

Please confirm the following settings. The Wizard will process for a few seconds.

Items	Values
Account ID	pm3
Description	PM Team Member
Email	pm3@thecus.com
User Quota	100GB
Group List	users, PMTeam
Read	
Read/Write	PM_ACL
Deny	
No Specified	ISCSI_kendoul


Previous Create Cancel

Batch Input:

The Thecus IP storage can also add users and groups in batch mode. This enables you to conveniently add numerous users and groups automatically by importing a simple Microsoft Excel (*.csv) file.

From the **User** menu, click **Batch Input** and the **Batch User Input Creation** dialogue will appear. To import your list of users and groups, follow these steps:

1. Click on the **Select** button to locate your Excel (.csv) file.
2. Click **Confirm Batch Input** to confirm import.
3. Or on the left bottom corner can download sample file to manipulate.

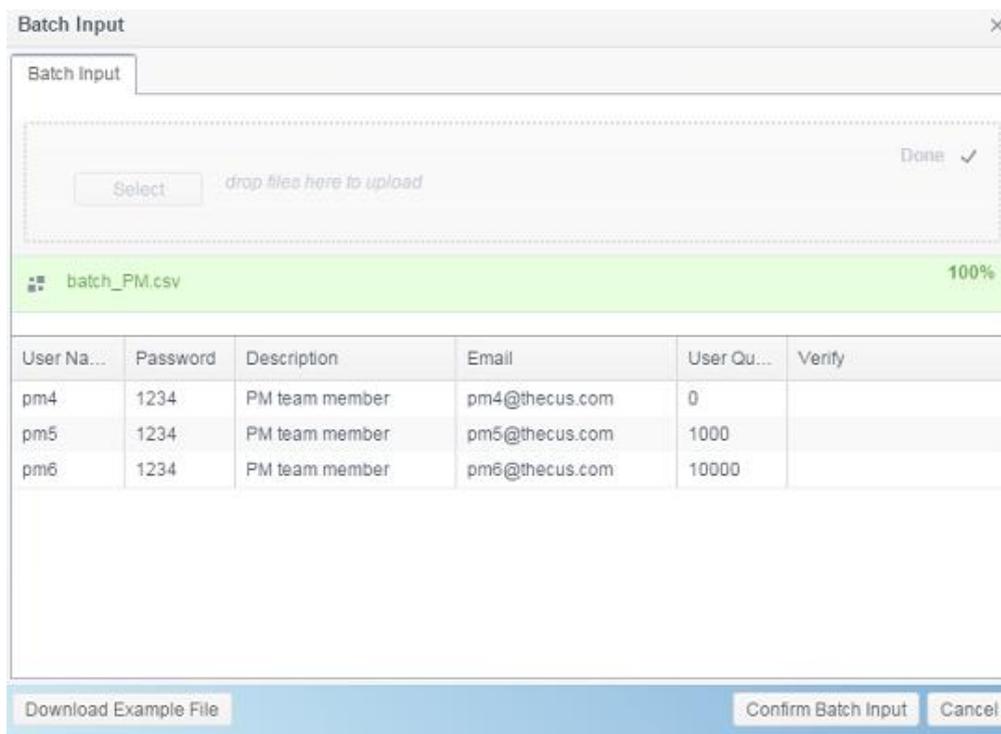

The screenshot shows a 'Batch Input' dialog box. At the top, there is a 'Batch Input' tab and a 'Done' button with a checkmark. Below this is a file selection area with a 'Select' button and the text 'drop files here to upload'. A file named 'batch_PM.csv' is shown as uploaded with a 100% completion indicator. Below the file list is a table with the following data:

User Na...	Password	Description	Email	User Qu...	Verify
pm4	1234	PM team member	pm4@thecus.com	0	
pm5	1234	PM team member	pm5@thecus.com	1000	
pm6	1234	PM team member	pm6@thecus.com	10000	

At the bottom of the dialog, there are three buttons: 'Download Example File', 'Confirm Batch Input', and 'Cancel'.

NOTE

All users are automatically assigned to the 'users' group.

Edit User:

1. Select an existing user from the list.
2. Click on the **Edit** button, and the **User Setting** screen appears.
3. Making the changes if need.

Edit

Information | Group | ACL

Basic Information

User Name: pm4 Set this user as administrator

Password: Please Input Password Here

Confirm Password:

Description: PM team member

Email: pm4@thecus.com

User Quota: 0 MB

Delete User | Apply | Cancel

Delete User:

1. Select an existing user from the list.
2. Click on the **Delete User** button, and the **User** will remove from system.

Edit

Information | Group | ACL

Basic Information

User Name: pm4 Set this user as administrator

Password: Please Input Password Here

Confirm Password:

Description: PM team member

Email: pm4@thecus.com


User Quota: 0 MB

Delete User | Apply | Cancel

Group

Create Group:

On the **Group** screen, press the **Create** button and the **Create Group** screen appears. Follow the wizard and system will lead you to complete the setting.

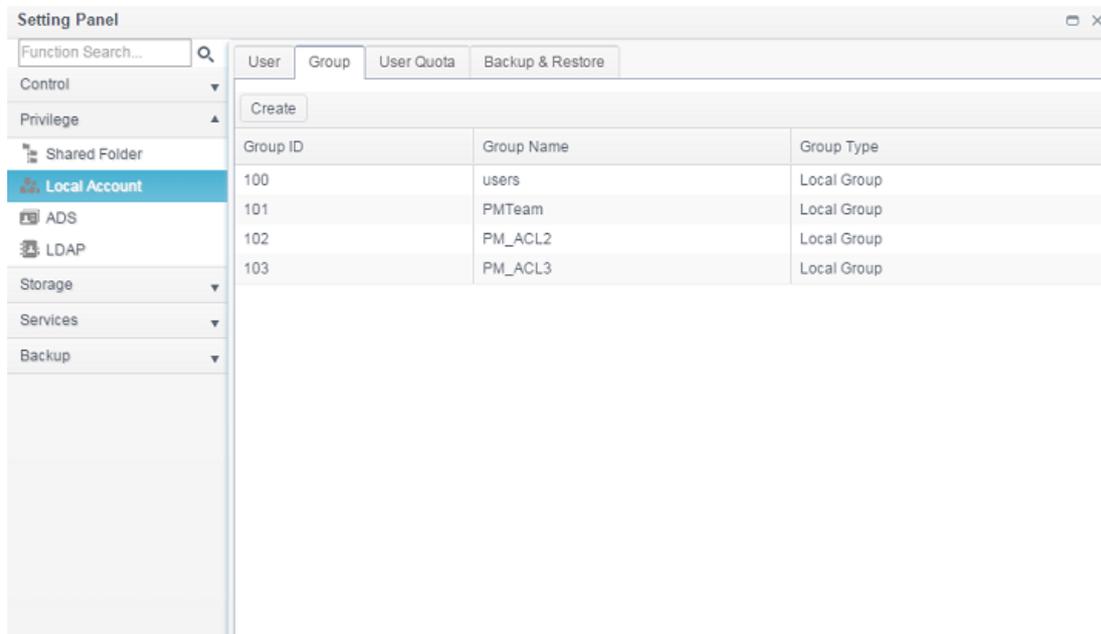

1. Enter a **Group ID** number or leave it to use the system default value.
2. On the **Group Name** field, enter a name for the **Group**.
3. Press the **Next** button to next page.

The screenshot shows a 'Group Information' form with the following fields:

Group ID:

Group Name:

At the bottom right, there are two buttons: 'Next' and 'Cancel'.

1. Select group members from user list.
2. Press the **Next** button to next page.

Users

Select Group Members

	UID	User Name
<input type="checkbox"/>	1000	pm1
<input type="checkbox"/>	1001	pm2
<input type="checkbox"/>	1003	pm3
<input type="checkbox"/>	1002	pm4
<input type="checkbox"/>	1004	pm5
<input type="checkbox"/>	1005	pm6

Previous
Next
Cancel

1. Set the access right for ACL folders.
2. Checked "Recursive" box if it will apply to all subfolders
3. Press the **Next** button to go to next page.

Folder Access Permission (ACL)

Set the access permission to shared folders.

Folder Name	<input type="checkbox"/> Read	<input type="checkbox"/> Read/Write	<input type="checkbox"/> Deny
PM_ACL	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
ISCSI_kendoui	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>

Recursive

Previous
Next
Cancel

1. The page has listed group's information for double check.
2. Press the **Create** button and the group is created.

Confirm Group Settings

Please confirm the following settings. The Wizard will process for a few seconds.

Items	Values
Group Name	PM_ACL3
Group ID	103
User List	pm2, pm3, pm4
Read	PM_ACL
Read/Write	
Deny	
No Specified	ISCSI_kendoui

Previous
Create
Cancel

Edit Group:

1. Select an existing group from the list.
2. Click on the **Edit** button, and the **Group Setting** screen appears.
3. Making the changes if need.

Edit ×

Information User ACL

Basic Information


Group Name: PMTeam

Group ID: 101

Delete Group
Apply
Cancel

Delete Group:


1. Select an existing user from the list.
2. Click on the **Delete Group** button, and the **User** will remove from system.

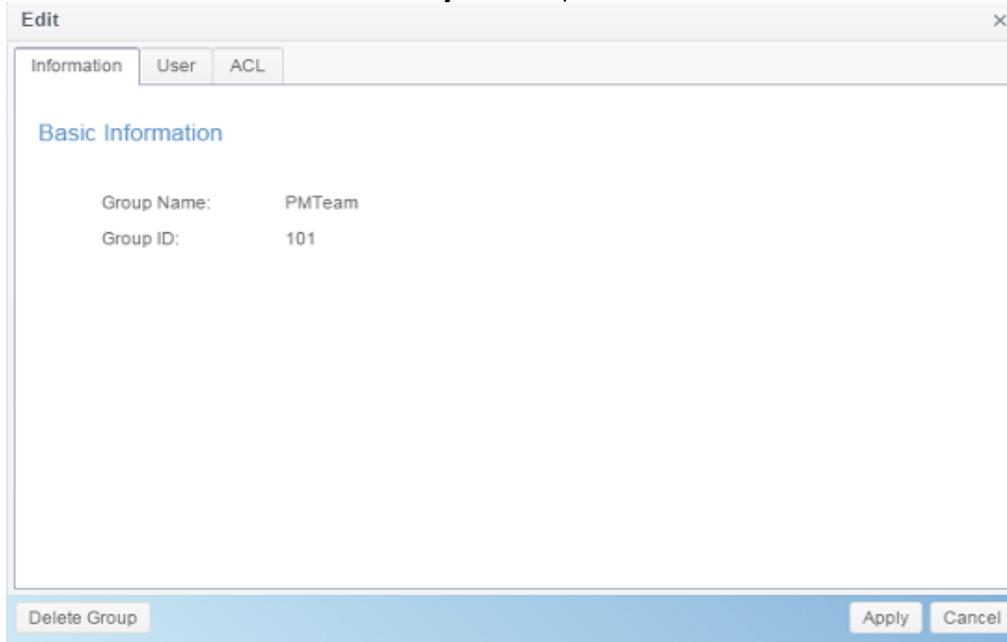

User Quota (Btrfs not support)

The Thecus IP storage support local or AD users with storage quota limitations in each RAID volume of the system. To enable this function, simply click "Enable", then apply.

It can click on Start Scan button to have most update of quota usage for every user and associated RAID volumes.

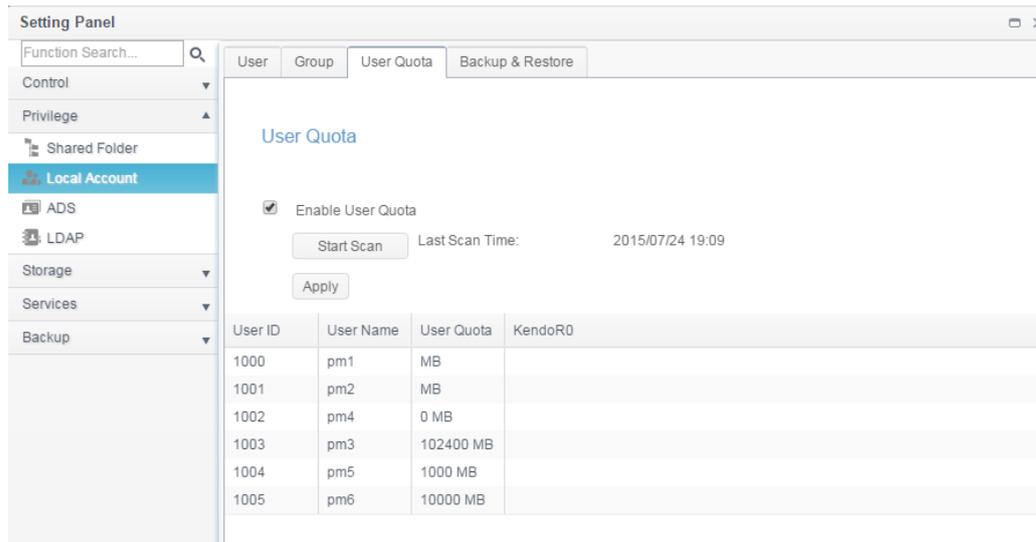


Backup & Restore

User and group settings download/upload:

The user and group backup feature allow system users and groups to be backed up to another location and be restored if needed.


Please note, when restoring previous backup users and groups, the current users and groups list will be replaced from this restore file's contents.

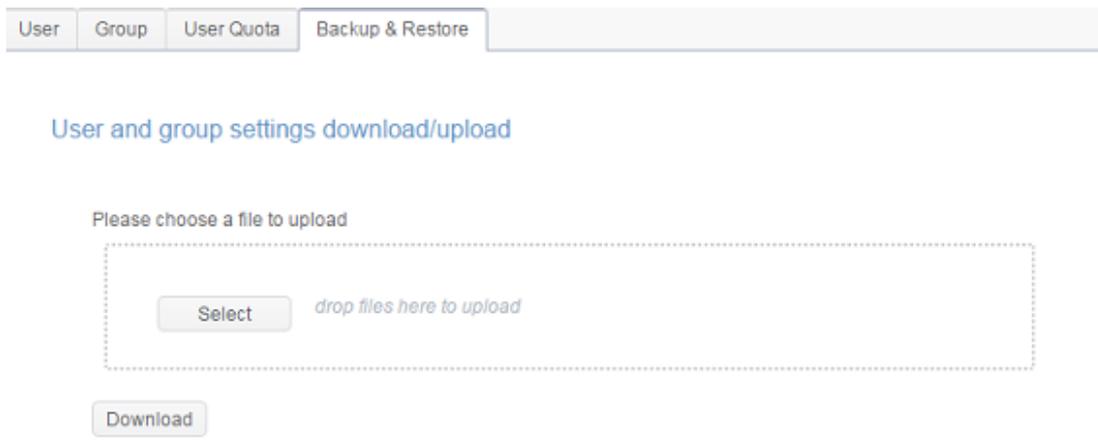

The screenshot shows a web interface with a navigation bar at the top containing tabs for 'User', 'Group', 'User Quota', and 'Backup & Restore'. The 'Backup & Restore' tab is active. Below the navigation bar, the page title is 'User and group settings download/upload'. The main content area contains the text 'Please choose a file to upload' above a dashed rectangular box. Inside this box, there is a 'Select' button and the text 'drop files here to upload'. Below the dashed box, there is a 'Download' button.

ACL backup/restore


The ACL backup and restore feature enables the system ACL (Access Control List) to be backed up on the RAID volume based to other location and restored if needed.

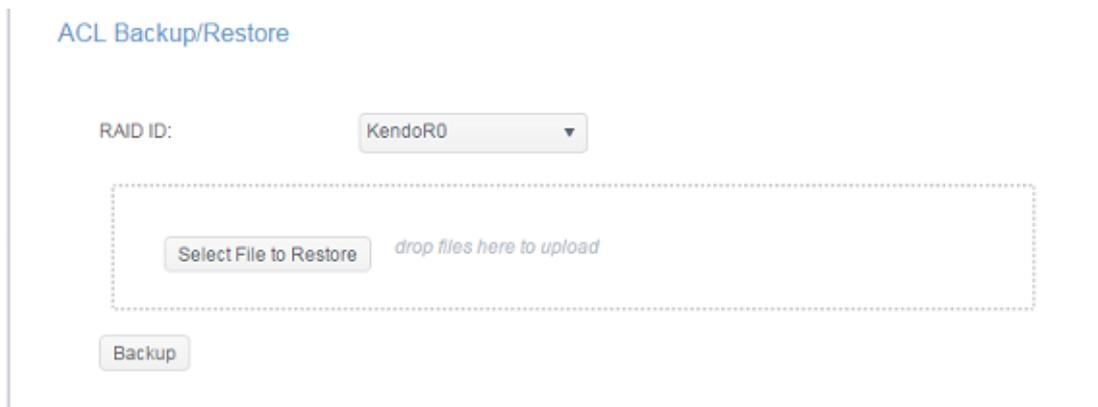

The screenshot shows a web interface titled 'ACL Backup/Restore'. It features a 'RAID ID:' label followed by a dropdown menu showing 'KendoR0'. Below this, there is a dashed rectangular box containing a 'Select File to Restore' button and the text 'drop files here to upload'. At the bottom of the interface, there is a 'Backup' button.

ADS


If you have a Windows Active Directory Server (ADS) to handle the domain security in your network, you can simply enable the ADS support feature; the Thecus IP storage will connect with the ADS server and get all the information of the domain users and groups automatically. From the **Privilege** menu, choose **ADS** item and the **ADS Setting** screen appears. You can change any of these items and press **Apply** to confirm your settings.

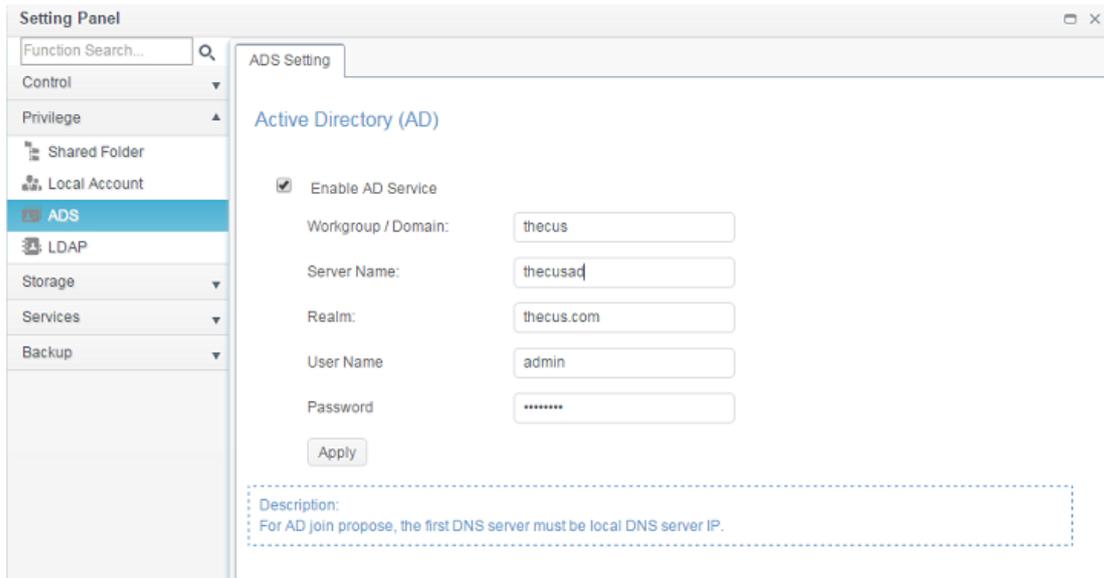

A description of each item follows:

ADS/NT Support	
Item	Description
Work Group / Domain Name	Specifies the SMB/CIFS Work Group / ADS Domain Name (e.g. MYGROUP).
ADS Support	Select Disable to disable authentication through Windows Active Directory Server.
ADS Server Name	Specifies the ADS server name (e.g. adservername).
ADS Realm	Specifies the ADS realm (e.g. example.com).
Administrator ID	Enter the administrators ID of Windows Active Directory, which is required for Thecus IP storage to join domain.
Administrator Password	Enter the ADS Administrator password.
Apply	To save your settings.

To join an AD domain, you can refer to the figure here and use the example below to configure the Thecus IP storage for associated filed input:

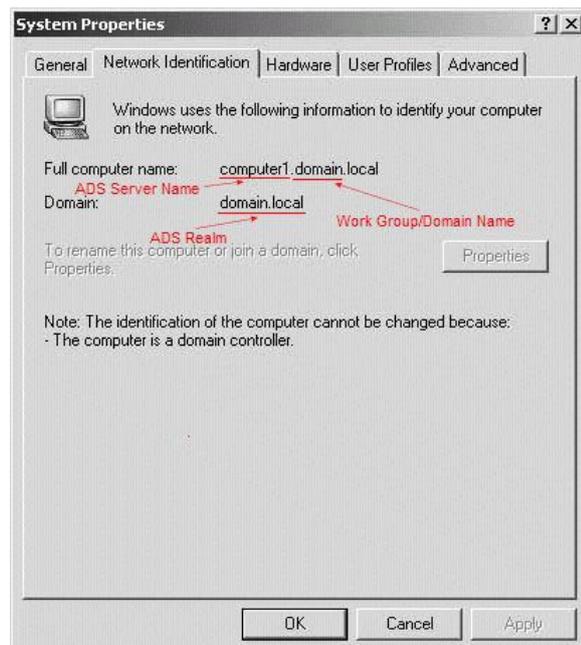

AD Domain Example	
Item	Information
Work Group / Domain Name	domain
ADS Support	Enable
ADS Server Name	Computer1
ADS Realm	Domain.local
Administrator ID	Administrator
Administrator Password	*****

NOTE

- The DNS server specified in the WAN/LAN1 configuration page should be able to correctly resolve the ADS server name.
- The time zone setting between Thecus IP storage and ADS should be identical.
- The system time difference between Thecus IP storage and ADS should be less than five minutes.
- The Administrator Password field is for the password of ADS (Active Directory Server) not Thecus IP storage.

LDAP

The LDAP is the other way to authenticate login users who has joined LDAP server, fill in the LDAP server information and get LDAP authentication started. Please make sure that the LDAP server has a Samba sam **and** a POSIX ObjectClass account.

LDAP Setting

Lightweight Directory Access Protocol (LDAP)

Enable LDAP Service

Server IP:

Bind DN or LDAP Account:

Password:

Base DN:

User Base DN:

Group Base DN:

Security:

Samba ID: S-1-5-21-4211182674-4247146397-3431630560

LDAP Support	
Item	Description
LDAP Service	Enable or Disable LDAP service.
LDAP Server IP	Input LDAP server IP address.
Base Domain	Input base domain information ex. dc=tuned, dc=com, dc=tw
Manager	Input manager's name.

Password	Input manager's password
Apply	Click Apply to save your changes.
Check ObjectClass	Click this checkbox to ensure LDAP server has a Samba sam and a POSIX account or it may not work properly for LDAP client authentication.

Storage




Disk & RAID

& RAID and the associated storage information will display. Also the related setting can be operated from here.

RAID

From the **Disk & RAID** menu, choose the **RAID** item and the **RAID Management** screen appears.

This screen lists the RAID volumes currently residing in the Thecus IP storage. From this screen, you can get information about the status of your RAID volumes, as well as the capacities allocated for data.

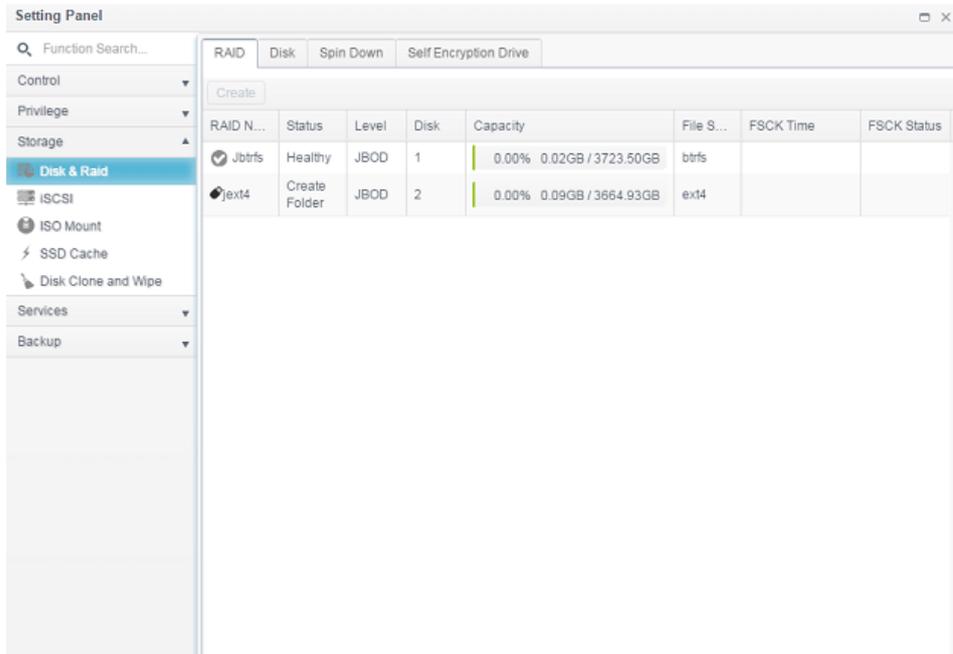

Create a RAID


On the **RAID Information** screen, press the **Create** button to go to the **RAID Volume Creation** screen. In addition to RAID disk information and status, this screen lets you make RAID configuration settings.

Using **Create RAID**, you can select stripe size, choose which disks are RAID disks or the Spare Disk. .


RAID Configurations	
Item	Description
Disk .	Number assigned to the installed hard disks.
Capacity (MB)	Capacity of the installed hard disks.
Model	Model number of the installed hard disks.
Status	Status of the installed hard disks.
Used	If this is checked, current hard disk is already part of a RAID volume.
Spare	If this is checked, current hard disk is designated as a spare for a RAID volume.
Master RAID	Check a box to designate this as the Master RAID volume. See the NOTE below for more information.
Stripe Size	This sets the stripe size to maximize performance of sequential files in a storage volume. Keep the 64K setting unless you require a special file storage layout in the storage volume. A larger stripe size is better for large files.
Data Percentage	The percentage of the RAID volume that will be used to store data.
Create	Press this button to configure a file system and create the RAID storage volume.

To create a RAID volume, follow the steps below:


1. On the **Select Disk** screen, select available disks for the RAID volume member(s).

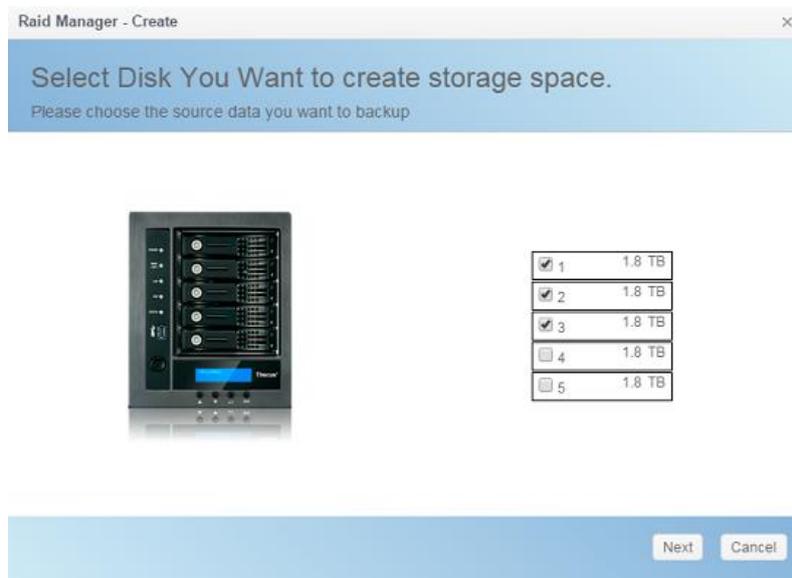


2. Set the RAID storage space as **JBOD, RAID 0, RAID 1, RAID 5, RAID 6, RAID 10, RAID 50 and RAID 60** (depends on how many disks has installed into system)— see **Appendix B: RAID Basics** for a detailed description of each.

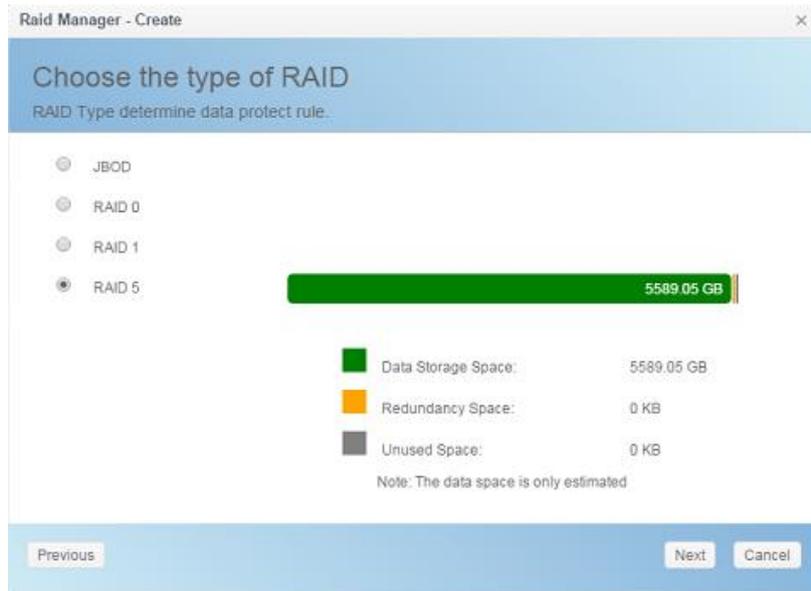

3. Choose spare disk for associated RAID volume if applicable.

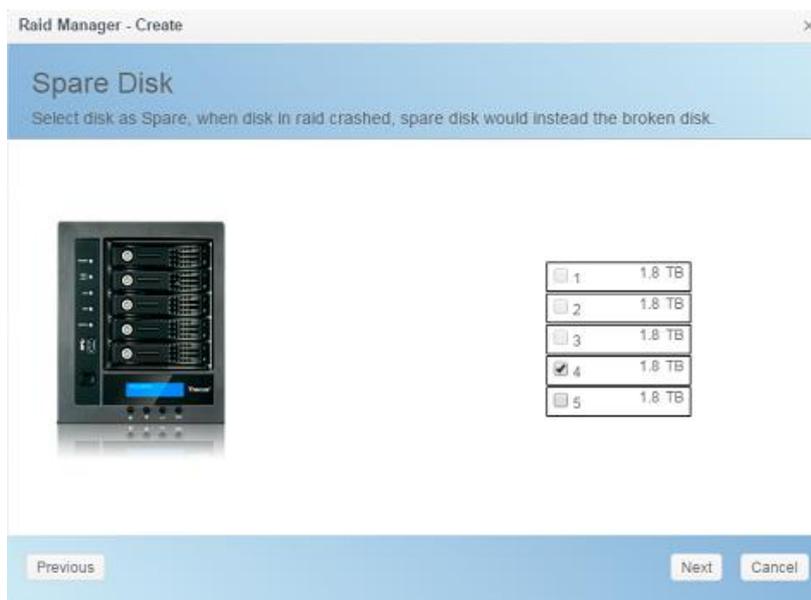

4. Specify a RAID Name.

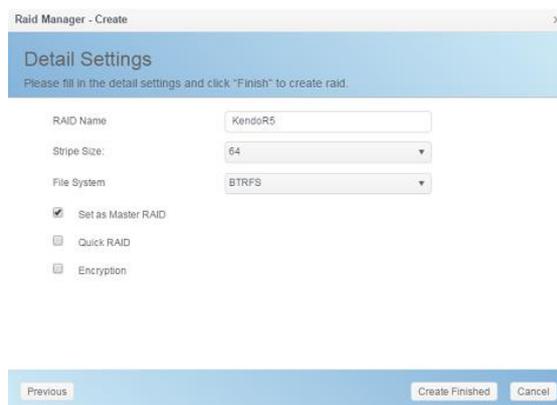

5. If this RAID volume is meant to be the Master RAID volume, tick the **Master RAID** checkbox.

Raid Manager - Create

Detail Settings

Please fill up the detail settings and click "Finish" to create raid.

RAID Name: KendoR5

Stripe Size: 64

File System: BTRFS

Set as Master RAID

Quick RAID

Encryption

Previous Create Finished Cancel

NOTE

In a multiple RAID configuration, one RAID volume must be designated as the Master RAID volume. The Master RAID volume will store all installed modules. If the Master RAID is changed to another location (i.e. assigning volume 2 to be the Master RAID volume after volume 1 had been previously assigned), then all modules must be reinstalled. In addition, all system folders that were contained on the Master RAID volume will be invisible. Reassigning this volume to be the Master RAID will make these folders visible again.

6. Selected whether the RAID volume will be encrypted or not. The RAID volume can protect data by using RAID Volume Encryption function to prevent the risk of data exposure. To activate this function, the **Encryption** option needs to be enabled while the RAID is created and followed by a password input for identification. Also, an external writable USB disk plugged into any USB port on the system is required to save the password you have entered while the RAID volume is being created. See the screenshot below for details.

Raid Manager - Create

Detail Settings

Please fill up the detail settings and click "Finish" to create raid.

RAID Name: Please Input Raid Name

Stripe Size: 64

File System: EXT4

Byte per inode: Auto

Set as Master RAID

Quick RAID

Encryption

Please Input Password Here Please Confirm Password Here

Previous Create Finished Cancel

After the RAID volume has been created, you may remove the USB disk until the next time the system boots. The RAID volume cannot be mounted if the USB disk with the encryption key isn't found in any system USB port when the volume is accessed. To activate the encrypted volume, plug the USB disk containing the encryption key and into any system USB port.

We strongly recommended copying the RAID volume encryption key to a safe place. You can find the encryption key file from the USB disk in the following format:

`(RAID volume created date)_xxxxxxx.key`

WARNING

Please keep your USB disk in a safe place and also backup the encrypted key.

There is no way to rescue data back if the key is lost.


NOTE

With RAID volume encryption enabled, the system performance will go down.

RAID volumes with encryption enabled will be displayed with a key lock symbol next to volume ID name.

RAID N...	Status	Level	Disk	Capacity	File S...	F5CK T...	F5CK Status
KendoR5	Create Folder	RAID5	1, 3, 2(4)	0.02% 0.74GB / 3721.00	btrfs		
EncryptRAID	Format Data	JBOD	5		ext4		

7. Quick RAID — Enabling the quick RAID setting is going to enhance RAID creation time.

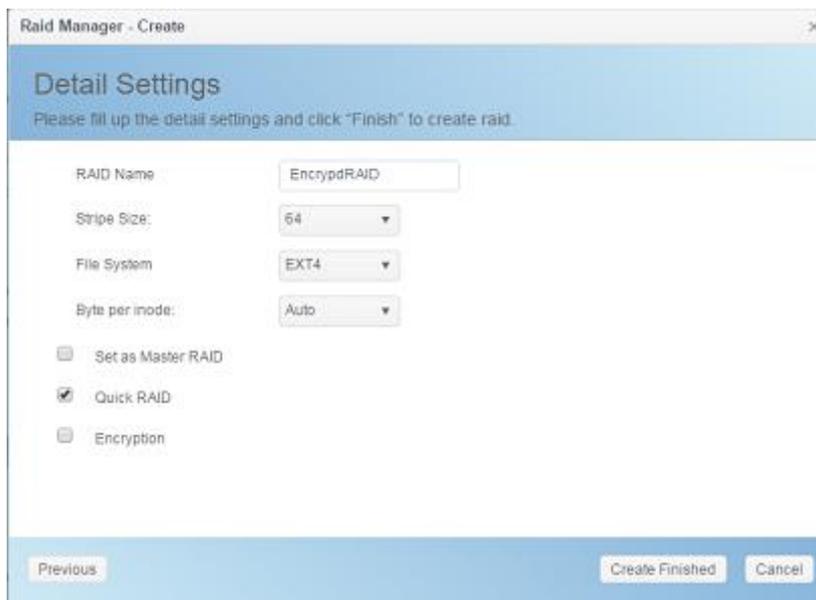

NOTE

We recommend using the "Quick RAID" setting only if the hard disks are brand new or if no existing partitions are contained.

8. Specify a stripe size — 64K is the default setting.
9. Specify size for "Bytes per inode" if ext3/ext4 has selected. The default value is Auto and it has no need to change for general use.
10. Select the file system you would like to have for this RAID volume. The selection is available from ext3, XFS, ext4 and btrfs(N2350/N4350 not supported).

NOTE

Single volume size supported:

ext3 → 8TB

XFS → 48TB

ext4 → 36TB

btrfs → 16EB

11. Press **Create Finished** to build the RAID storage volume.

NOTE

Building a RAID volume may be time consuming, depending on the size of hard drives and RAID mode. In general, if the RAID volume building process is up to "RAID Building", then the data volume is accessible.

WARNING

Creating RAID destroys all data in the current RAID volume. The data will be unrecoverable.

RAID Level

You can set the storage volume as **JBOD, RAID 0, RAID 1, RAID 5, RAID 6, RAID 10, RAID 50 and RAID 60 (Depend on Model and how many disks has been installed)**.

Level Model	JBOD	RAID 0	RAID 1	RAID 5	RAID 6	RAID 10	RAID 50	RAID 60
N2350 series	•	•	•					
N4350 series	•	•	•	•	•	•		

RAID configuration is usually required only when you first set up the device. A brief description of each RAID setting follows:

RAID Levels	
Level	Description
JBOD	The storage volume is a single HDD with no RAID support. JBOD requires a minimum of 1 disk.
RAID 0	Provides data striping but no redundancy. Improves performance but not data safety. RAID 0 requires a minimum of 2 disks.
RAID 1	Offers disk mirroring. Provides twice the read rate of single disks, but same write rate. RAID 1 requires a minimum of 2 disks.
RAID 5	Data striping and stripe error correction information provided. RAID 5 requires a minimum of 3 disks. RAID 5 can sustain one failed disk.


RAID 6	Two independent parity computations must be used in order to provide protection against double disk failure. Two different algorithms are employed to achieve this purpose. RAID 6 requires a minimum of 4 disks. RAID 6 can sustain two failed disks.
RAID 10	RAID 10 has high reliability and high performance. RAID 10 is implemented as a striped array whose segments are RAID 1 arrays. It has the fault tolerance of RAID 1 and the performance of RAID 0. RAID 10 requires 4 disks. RAID 10 can sustain two failed disks.

WARNING

If the administrator improperly removes a hard disk that should not be removed when RAID status is degraded, all data will be lost.

Edit RAID

1. Select an existing RAID volume from the list.
2. Click on the **Edit** button, and the **RAID volume setting** screen appears.
3. Making the changes such as RAID name or role of master RAID if needed.

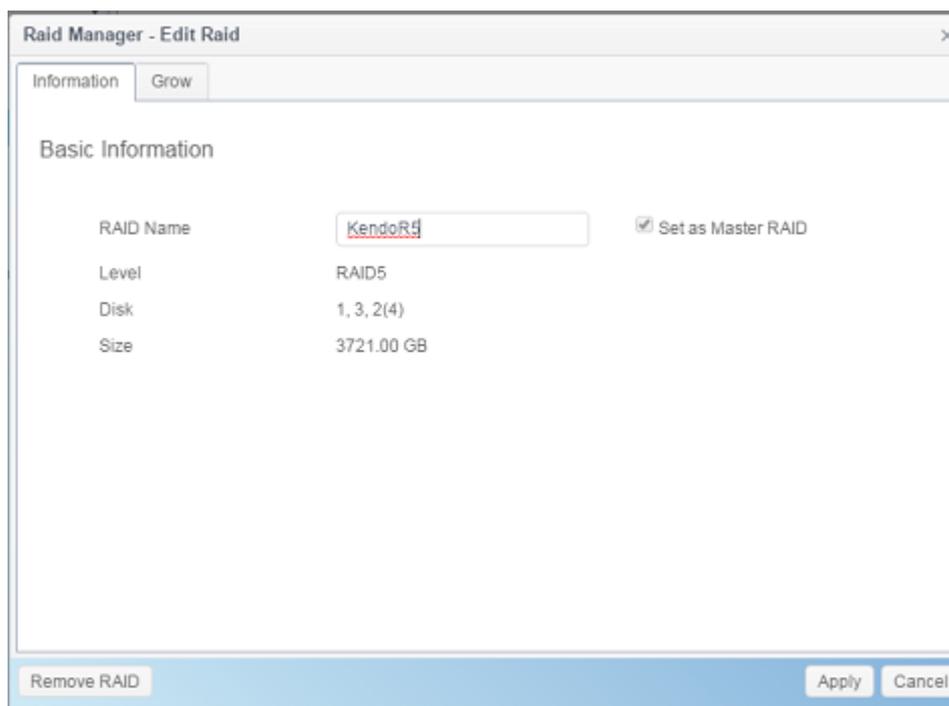

Remove RAID

1. Select an existing RAID volume from the list.
2. Click on the **Remove RAID** button from left bottom corner, A confirmation screen will appear.
3. Confirm with click "OK" to complete the "**Remove RAID**" operation.

Click to remove the RAID volume. All user data and iSCSI created in the selected RAID volume will be deleted.


WARNING

Remove RAID destroys all data in the selected RAID volume. The data will be unrecoverable.

Expanding a RAID

To expand a RAID 1, RAID 5, or RAID 6 volume, follow the steps below:

1. Replace one of the hard drives in the RAID volume and allow it to automatically rebuild.
2. Once rebuilt, you can continue to replace any remaining disks in the RAID array.
3. When you are done replacing hard drives, click on RAID volume that is going to expand capacity. System will have additional tab **"Space Expansion"** appear if associated RAID volume is capable for expansion.
4. On the **RAID Configuration** screen, click **Space Expansion**.

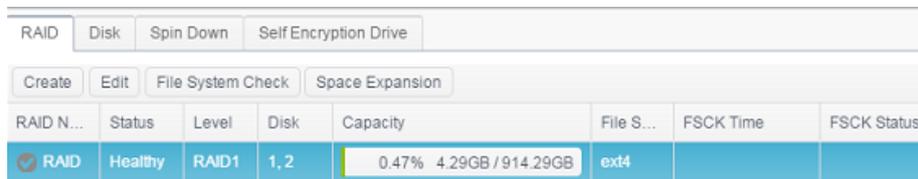


RAID N...	Status	Level	Disk	Capacity	File S...	FCK Time	FCK Status
RAID	Healthy	RAID1	1, 2	0.47% 4.29GB / 914.29GB	ext4		


File System Check

The File System Check allows you to perform a check on the integrity of your disks' file system.

To perform File System Check, select RAID volume from RAID Volume list and the tab **File System Check** will appear. Click on **File System Check** button to start the task. From the screen, it will display FSCK check time and checking status.

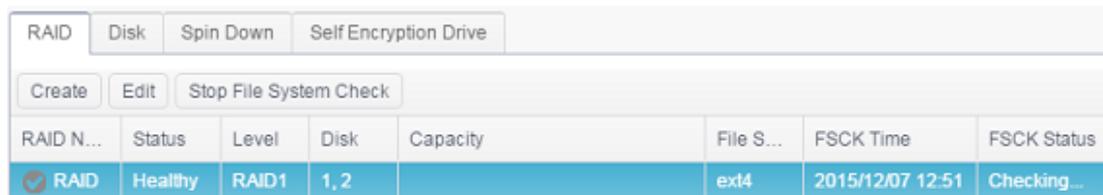

RAID N...	Status	Level	Disk	Capacity	File S...	FCK Time	FCK Status
RAID	Healthy	RAID1	1, 2		ext4	2015/12/07 12:51	Checking...

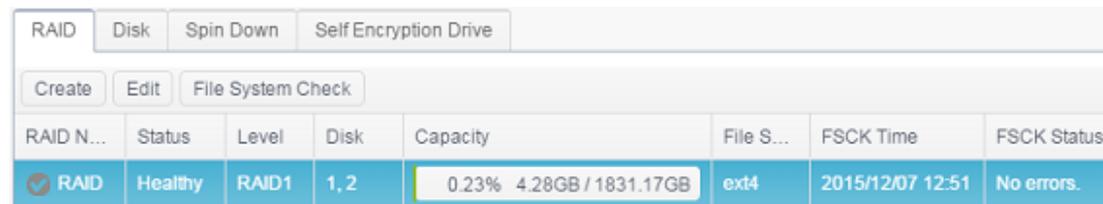

RAID N...	Status	Level	Disk	Capacity	File S...	FCK Time	FCK Status
RAID	Healthy	RAID1	1, 2	0.23% 4.28GB / 1831.17GB	ext4	2015/12/07 12:51	No errors.

Migrating a RAID

Once a RAID volume has been created, you may want to move it to other physical drives or change the RAID array all together. To migrate a RAID 1, RAID 5 or RAID 6 volume, follow the steps below:

1. Select RAID volume which is going to execute **RAID Migration**.
2. Press **Edit** to bring up management screen.
3. Choose **Grow** to have all installed disks listed included used and unused.



4. Select from unused disk then click **OK**, the system will bring up available options to choose from.



5. Confirm the setting, then system will begin migrate the RAID volume.

NOTE

- Migrating a RAID volume could take several hours to complete
- The RAID migration feature is available only when it is configurable.

Here is a list of limitation with RAID level migration function:

1. During RAID level migration, it is not permitted to reboot or shutdown system.
2. For RAID migration from **R1 to R5 or R1 to R6**, all services will restart and "iSCSI" volume will be in read only mode but read/write of the "user data" will be possible during the operation.

NOTE

The migration scheme below is based on Thecus IP Storage product's maximum possible combination. For other model which supports less HDD, please refer to the web UI while RAID migration operates.

Below is a table listing of possible RAID migration schemes:

To From	RAID 0	RAID 5	RAID 6
RAID 1		[RAID 1] HDDx2 to [RAID 5] HDDx3 [RAID 1] HDDx2 to [RAID 5] HDDx4 [RAID 1] HDDx3 to [RAID 5] HDDx4	[RAID 1] HDDx2 to [RAID 6] HDDx4 [RAID 1] HDDx3 to [RAID 6] HDDx4
RAID 5	X	[RAID 5] HDDx3 to [RAID 5] HDDx4	[RAID 5] HDDx3 to [RAID 6] HDDx4

Disk


Disk & RAID talked hard disks basic information, used status and progress while perform bad block scan.

Raid Disk Spin Down					
Tray	Model	Capacity	Firmware	Used Status	Progress
1	WDC WD20EFRX-68E	1863 GB	80.0	RAID	
2	WDC WD20EFRX-68E	1863 GB	80.0	RAID	
3	WDC WD20EFRX-68E	1863 GB	82.0	RAID	
4	WDC WD20EFRX-68E	1863 GB	82.0	RAID	
5	WDC WD20EFRX-68E	1863 GB	80.0	Unused	Scanning 1 %

S.M.A.R.T.:

1. Select a disk from the list.
2. Click on **S.M.A.R.T.** tab to perform.

Once clicking on S.M.A.R.T., system will display the basic hard disk information and status. Based on S.M.A.R.T. status, system will give the healthy condition for reference. Please see below for details.

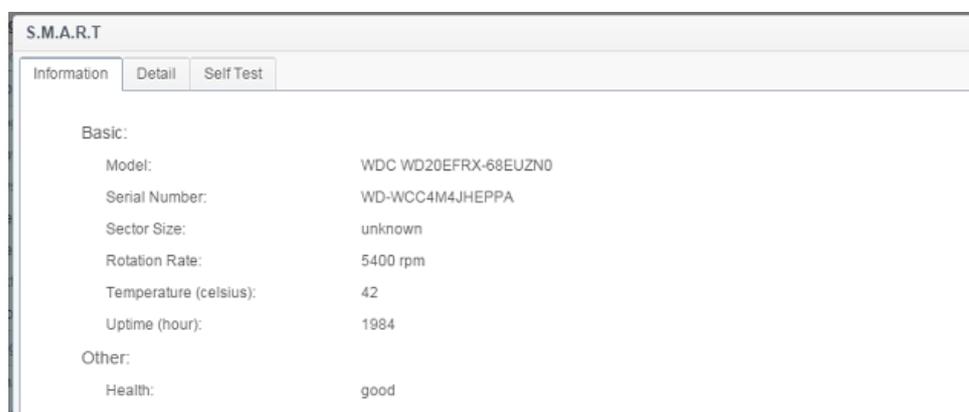

S.M.A.R.T. Information	
Item	Description
Model	Model name of the installed hard disk.
Serial Number	Serial number of the installed hard disk
Sector Size	Sector size of the installed hard disk
Rotation Rate	Rotation speed of the installed hard disk
Temperature (Celsius)	The current temperature of the installed disk in degree Celsius
Uptime(Hour)	Count of hours in power-on state. The raw value of this attribute shows total count of hours (or minutes, or seconds, depending on manufacturer) in power-on state.


For more technical S.M.A.R.T. information, please click on **Detail**.

The screenshot shows the 'S.M.A.R.T.' window with the 'Detail' tab selected. It displays a table of attributes with the following columns: ID, Attribute Name, Value, Worst, Thresh, Type, Updated, When Failed, and Raw Value.

ID	Attribute Name	Value	Worst	Thresh	Type	Updated	When Failed	Raw Value
1	Raw_Rea...	200	200	051	Pre-fail	Always	-	0
3	Spin_Up...	173	173	021	Pre-fail	Always	-	4325
4	Start_Stop...	100	100	000	Old_age	Always	-	193
5	Reallocate...	200	200	140	Pre-fail	Always	-	0
7	Seek_Erro...	200	200	000	Old_age	Always	-	0
9	Power_On...	098	098	000	Old_age	Always	-	1984
10	Spin_Retr...	100	100	000	Old_age	Always	-	0
11	Calibration...	100	253	000	Old_age	Always	-	0
12	Power_Cy...	100	100	000	Old_age	Always	-	50
192	Power-Off_Re trac...	200	200	000	Old_age	Always	-	17
193	Load_Cycl...	200	200	000	Old_age	Always	-	1253
194	Temperatu...	105	105	000	Old_age	Always	-	42
196	Reallocate...	200	200	000	Old_age	Always	-	0
197	Current_P...	200	200	000	Old_age	Always	-	0
198	Offline_Un...	100	253	000	Old_age	Offline	-	0
199	UDMA_C...	200	200	000	Old_age	Always	-	0
200	Multi_Zon...	100	253	000	Old_age	Offline	-	0

You may also like to perform a disk SMART test, simply click "Self Test" to start the SMART test. The result is only for reference and the system will not take any action from its results.

There are "Fast Test" or "Full test" can be choose from.

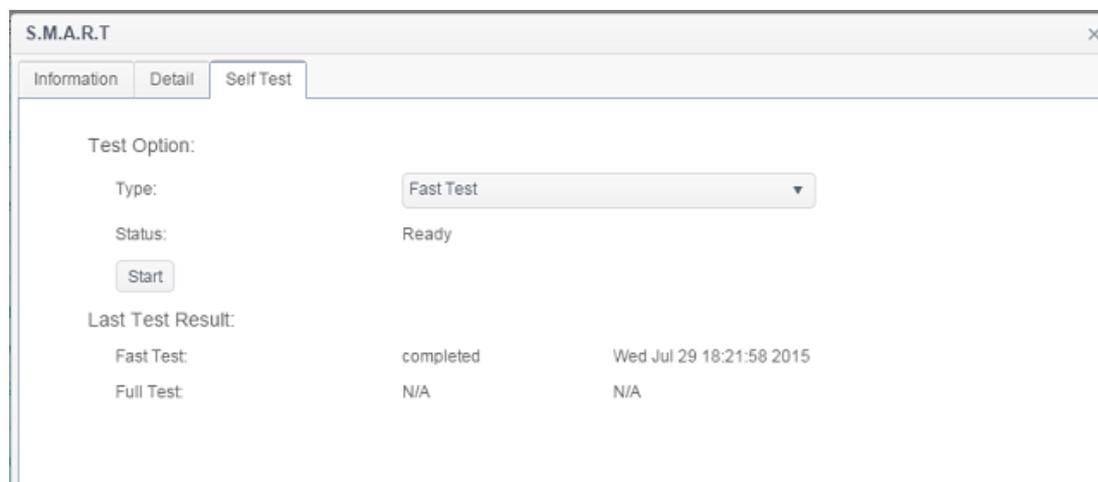


Bad Block Scan:

1. Select a disk from the list.
2. Click on **Start Scan Block button** to perform.
3. Click again to stop bad block scanning.



Global Hot Spare:

Click on installed hard disk but at unused status and the "Global Hot Spare" tab will appear. Check on the button to have associated hard disk as spare disk.

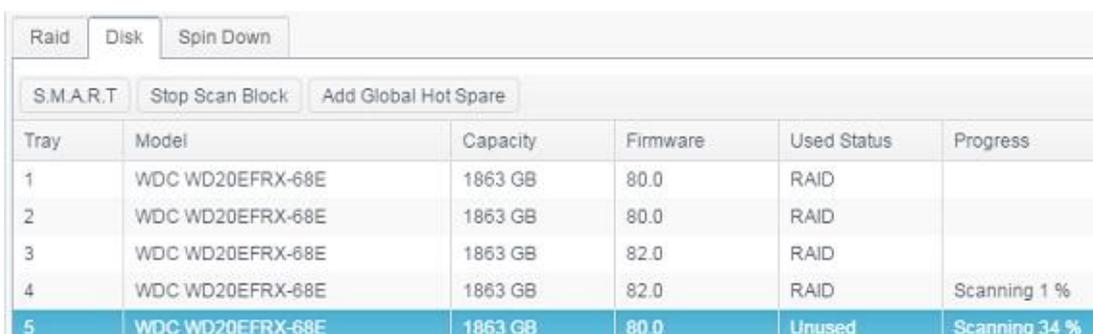

Spin Down

For disks installed into system, there is default 30 minutes to spin down if no disk activities have been detected. However, the spin down duration can be either turned off or extended. Select from drop down option to make choice.

Spin Down (Disk Power Management)

Spin Down Time: 30Minute

Apply

- Off
- 30Minute
- 60Minute
- 90Minute
- 120Minute

Disk Security



Thecus IP storage support Disk Security which could perform disk lock capability of disk itself. Click on "Disk Security" from category Disk & RAID and the installed disks list will appear. The disk drive which is capable for disk-security will have check box available to operate further. Please see below:

Disk Security

Refresh

<input type="checkbox"/>	Tray	Model	Suppor...	Encrypt...	Frozen	Locked
<input type="checkbox"/>	1	Hitachi HUA72303	No	No	No	No
<input type="checkbox"/>	2	WDC WD4000F9YZ-0	No	No	No	No
<input type="checkbox"/>	3	ST8000AS0002-1NA	Yes	Yes	No	No
<input type="checkbox"/>	4	ST8000AS0002-1NA	Yes	No	No	No

To setup available disk-security drive, please click on check box then "Set Password" tab will appear. Click on "Set Password" to have associated disk with Disk-Security enabled, please do install USB disk and the password will store on it or it will have an error message to notify you.

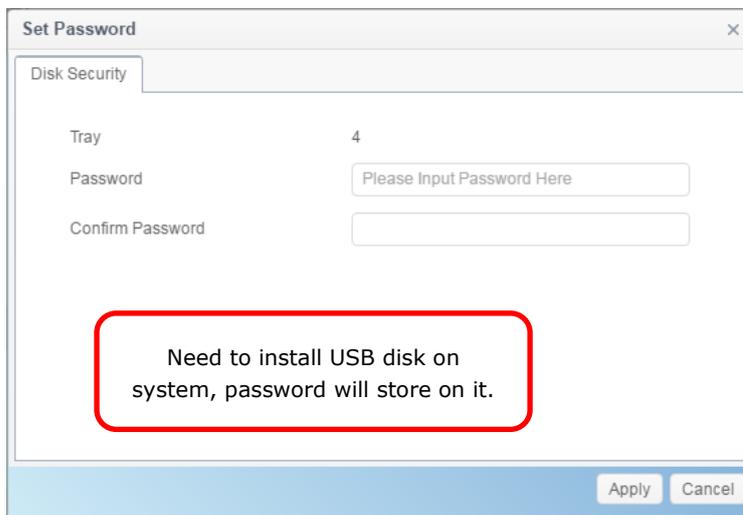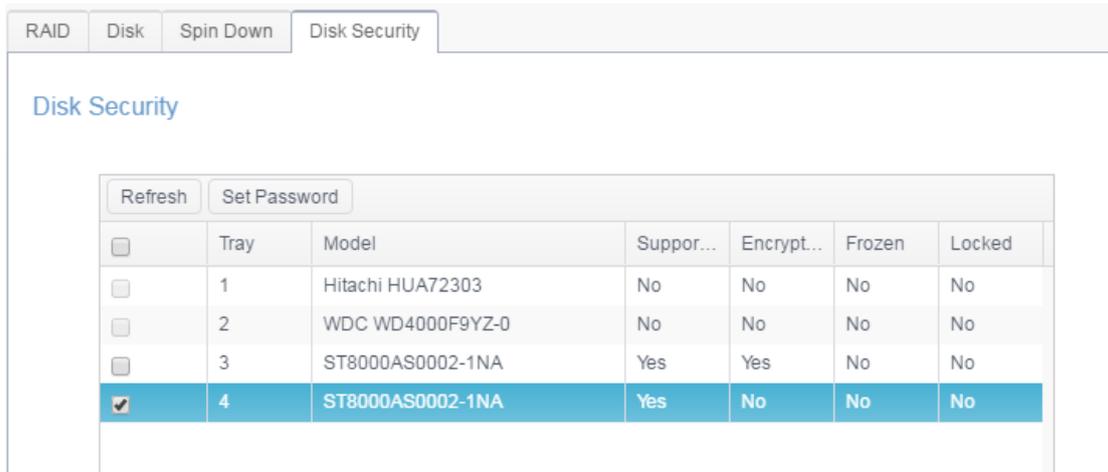


NOTE

- The disk to enable Disk-Security setting is only available while disk is unused
- The USB disk which has contained password need to plug-in on system once associated disk with Disk-Security enabled is part of RAID member during system power on.
- Without enable Disk-Security on installed disk, it is just like normal disk

To change the state of enabled Disk-Security disk, click on associated disk (MUST in unused) and the available function tab will appear.

<input type="button" value="Refresh"/> <input type="button" value="Set Password"/> <input type="button" value="Disable Disk Security"/> <input type="button" value="Erase Disk"/>						
<input type="checkbox"/>	Tray	Model	Suppor...	Encrypt...	Frozen	Locked
<input type="checkbox"/>	1	Hitachi HUA72303	No	No	No	No
<input type="checkbox"/>	2	WDC WD4000F9YZ-0	No	No	No	No
<input checked="" type="checkbox"/>	3	ST8000AS0002-1NA	Yes	Yes	No	No
<input type="checkbox"/>	4	ST8000AS0002-1NA	Yes	No	No	No

Other than Set Password as mentioned above, the Disk Security can be disabled by clicking on 'Disable Disk Security' and the disk can be erased by clicking on "Erase Disk" if correct password has been inputted.

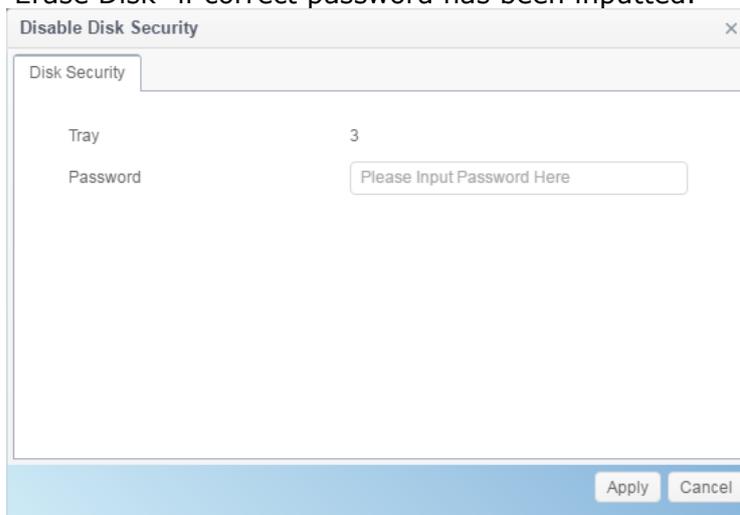

iSCSI

You may specify the space allocated for iSCSI. See the table below to view the allowed iSCSI target number per system:

Model	N2350 series N4350 series
Allowed iSCSI volume	25

iSCSI List

Add iSCSI Target

To add iSCSI target volume, click **Add** from **iSCSI List** and associated screen will appear.

To allocate space for an iSCSI target on the current RAID volume, follow the steps below:

1. Select desired RAID volume from its drop down list to have iSCSI target created.
2. Enter a **Target Name**. This will be used by the **Stackable NAS** function to identify this export share.
3. Choose the current year from the **Year** dropdown.
4. Choose the current month from the **Month** dropdown.
5. Enable the **iSCSI Target Volume** by selecting **Enable**.

NOTE

Be sure the iSCSI target volume has been enabled or it will not list out while using Initiator to get associated iSCSI target volumes.

Click Next

6. Choose **Authority Type** to enable **CHAP** authentication or **None**.
7. If you've enabled CHAP authentication, enter a **username** and a **password**. Confirm your chosen password by reentering it in the **Password Confirm** box.

Add iSCSI Target

Authority Protect

Add Protect Rule for Your Target

Authority Type: No Authority

Previous Next Cancel

Authority Type: Mutual CHAP

CHAP:

CHAP User Name: Please Input iSCSI User Name Here

CHAP Password: Please Input iSCSI User Password Here

Confirm CHAP Password:

Mutual CHAP

Mutual User Name: Please Input iSCSI User Name Here

Mutual Password: Please Input iSCSI User Password Here

Confirm Mutual Password:

Click Next

8. Enter a **LUN Name**.
9. When iSCSI target volume has been created, the LUN ID is configurable from 0 to 254 with a default of the next available number in ascending numerical order. The LUN ID is unique and cannot be duplicated.
10. Designate the capacity for associate **LUN**.
11. Choose **Thin-Provision** or **Instant Allocation**
12. Choose [**4K**] **block size** to have iSCSI target volume over 2TB barrier or [**512 Bytes**] **block size** in some application needed.

NOTE

The iSCSI target volume creation will associate at least one LUN together. It can be assigned either "Thin-Provisioning" or "Instant Allocation".

Add iSCSI Target X

Create a LUN for this Target

Create LUN

LUN Name:

LUN ID:

Capacity: GB Unused: 65536 GB

Type: Thin-Provision Instant Allocation

iSCSI Block Size: 4k Bytes 512 Bytes

Click Next

13. It will display the setting for associated iSCSI target creation. Click **Finish** to create the iSCSI volume.

Add iSCSI Target X

Confirm Your Settings

Target		LUN	
Items	Values	Items	Values
RAID Number	0	Name	kendo01
Name	kendo01	LUN ID	0
Year	2015	Size	1000 GB
Month	11	Type	Thin-Provision
Enable	Yes	Block Size	4k Bytes
Maximal Connection	8	Target Name:	kendo01
Error Recovery Level:	2	RAID Number	0
InitialR2T	No		
Data Digest	No		
Header Digest	No		
Emulate Write Cache	Yes		
Authentication Type	CHAP		
User	thecuspmandyliao		
Password	000000000000		

Create iSCSI Volume	
Item	Description
iSCSI Target Volume	Enable or Disable the iSCSI Target Volume.
Target Name	Name of the iSCSI Target. This name will be used by the Stackable NAS function to identify this export share.
iqn_Year	Select the current year from the dropdown.
Iqn_Month	Select the current month from the dropdown.
Authentication	You may choose CHAP authentication or choose None.
Username	Enter a username.
Password	Enter a password.
Password Confirm	Reenter the chosen password
Mutual CHAP	With this level of security, the target and the initiator authenticate each other.
Username	Enter a username.
Password	Enter a password.
Password Confirm	Reenter the chosen password
RAID ID	ID of current RAID volume.
LUN Allocation	Two modes can be choose from: Thin-provision : iSCSI thin-provisioning shares the available physical capacity to multiple iSCSI target volumes. It allows virtual capacity to be assigned to targets prior to adding physical space when it has run out. Instant Allocation: Allocate available physical capacity to iSCSI target volumes.
LUN Name	Name of the LUN.
Unused	Unused space on current RAID volume.
Allocation	Percentage and amount of space allocated to iSCSI volume.
LUN ID	Specific Logic unit ID number.
iSCSI Block size	The iSCSI block size can be set under system advance option, default is 512 Bytes. [4K] block size while more than 2TB capacity will be configured in Windows XP. [512 Bytes] block size for application like VMware etc.

Advance Option

There are available options for the user to operate Thecus IP storage associated with iSCSI setting. The details are listed in the following screenshot. If the options are modified, the system will need to reboot for the changes to take place.

Advanced

MAX Connections:

Error Recovery Level:

InitialR2T:

Data Digest

Header Digest

Emulate Write Cache

Max Connections

The maximum number of iSCSI connections.

Error Recovery Level

The Error Recovery Level (ERL) is negotiated during a leading iSCSI connection login in traditional iSCSI (RFC 3720) and iSER (RFC 5046).

ERL=0: Session Recovery

ERL=0 (Session Recovery) is triggered when failures within a command, within a connection, and/or within TCP occur. This causes all of the previous connections from the failed session to be restarted on a new session by sending a iSCSI Login Request with a zero TSIHRestart all iSCSI connections on any failure.

ERL=1: Digest Failure Recovery

ERL=1, only applies to traditional iSCSI. For iSCSI/SCTP (which has its own CRC32C) and both types of iSER (so far), handling header and data checksum recovery can be disabled.

ERL=2: Connection Recovery

ERL=2, allows for both single and multiple communication path sessions within a iSCSI Nexus (and hence the SCSI Nexus) to actively perform realligence/retry on iSCSI ITTs from failed iSCSI connections. ERL=2 allows iSCSI fabrics to take advantage of recovery in all regards of transport level fabric failures, and in a completely OS independent fashion (i.e. below the host OS storage stack).

initialR2T

InitialR2T is a setting that only really matters over high-latency WAN connections and perhaps in some exotic situations with synchronous writes to very, very fast storage.

iSCSI CRC/Checksum

To enable this option, the initiator can connect with "Data digest" and "Header digest".


Emulate Write Cache

To enable this option, the performance will increase. .

Modify/Remove iSCSI Target

To modify or remove iSCSI target on the current RAID volume, follow the steps below:

1. Under the **iSCSI List**, click on desired iSCSI volume you like to modify or remove.

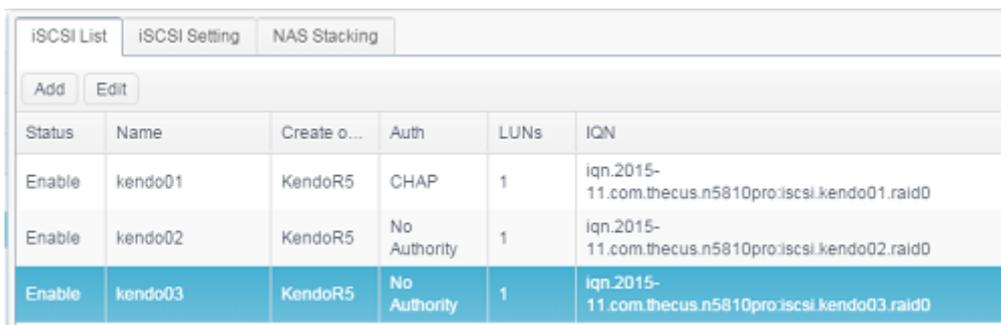

Status	Name	Create o...	Auth	LUNs	IQN
Enable	kendo01	KendoR5	CHAP	1	iqn.2015-11.com.thecus.n5810pro:iscsi.kendo01.raid0
Enable	kendo02	KendoR5	No Authority	1	iqn.2015-11.com.thecus.n5810pro:iscsi.kendo02.raid0
Enable	kendo03	KendoR5	No Authority	1	iqn.2015-11.com.thecus.n5810pro:iscsi.kendo03.raid0

2. Click on **Edit** and associated screen will appear.
3. Click on **Remove Target** to remove it or make necessary change then press **Apply** to confirm.

Edit iSCSI Target

Information | Auth | LUNs | Connections

Basic Information

Status: Disable Enable

Create on RAID: KendoR5

Target Name: kendo03

Iqn Year & Month: 2015 : 11

Advanced

Remove Target | Apply | Cancel

4. The associated LUN ID can be changed and also expand LUN capacity from LUNs tab.

Information | Auth | LUNs | Connections

Add | Edit

LUN Name	LUN ID	Size	Type	Block Size
kendo03	0	700 GB	Instant Allocation	4k Bytes

Edit LUN

General Settings

RAID ID: KendoR5

LUN Name: kendo03

LUN ID: 0


Allocation: 700 GB Unused: 2919 GB

Type: Instant Allocation

ISCSI Block Size: 4k Bytes


Remove LUN | Apply | Cancel

5. To check the connection for associated LUN, click on **Connections**.

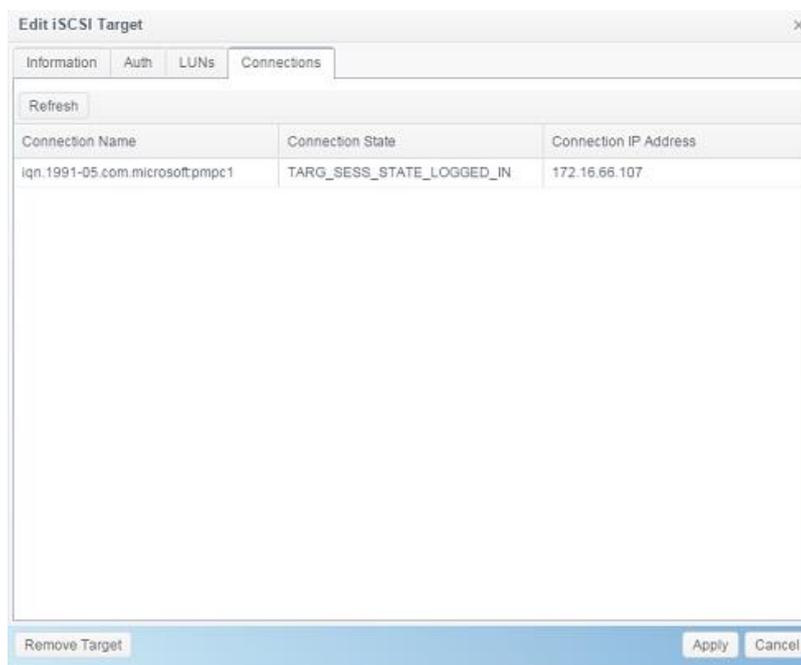

iSCSI Setting


The iSCSI service can be enabled/disabled globally. If iSCSI service has been turned off then each individual iSCSI volume will be inaccessible.

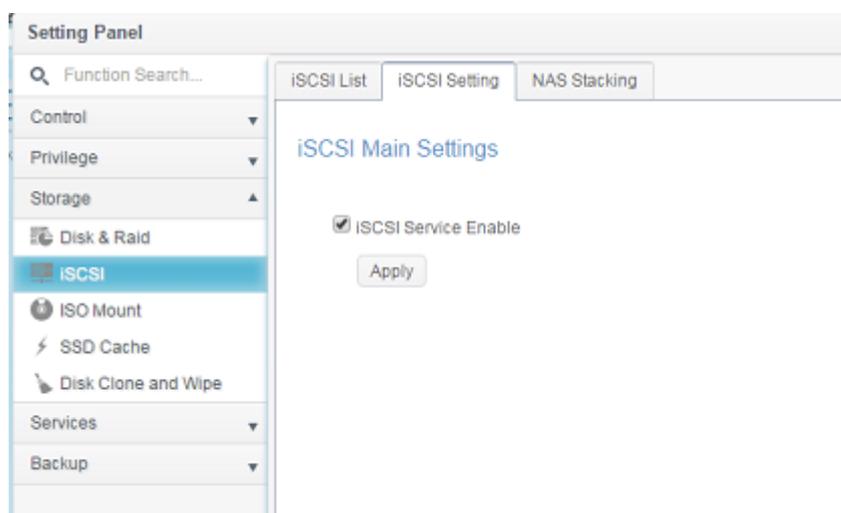

NAS Stacking

The Thecus IP storage's capacity can be expanded even further using the stackable function. With it, users can expand the capacity of their network storage systems up to 5 other stack target volumes which are located in different systems. These can be stacked through single network access like SMB or AFP acting as a share folder type.


From the main menu, the **NAS Stacking** feature is located in **iSCSI** under **"Storage"**. Please refer the figure below for reference.

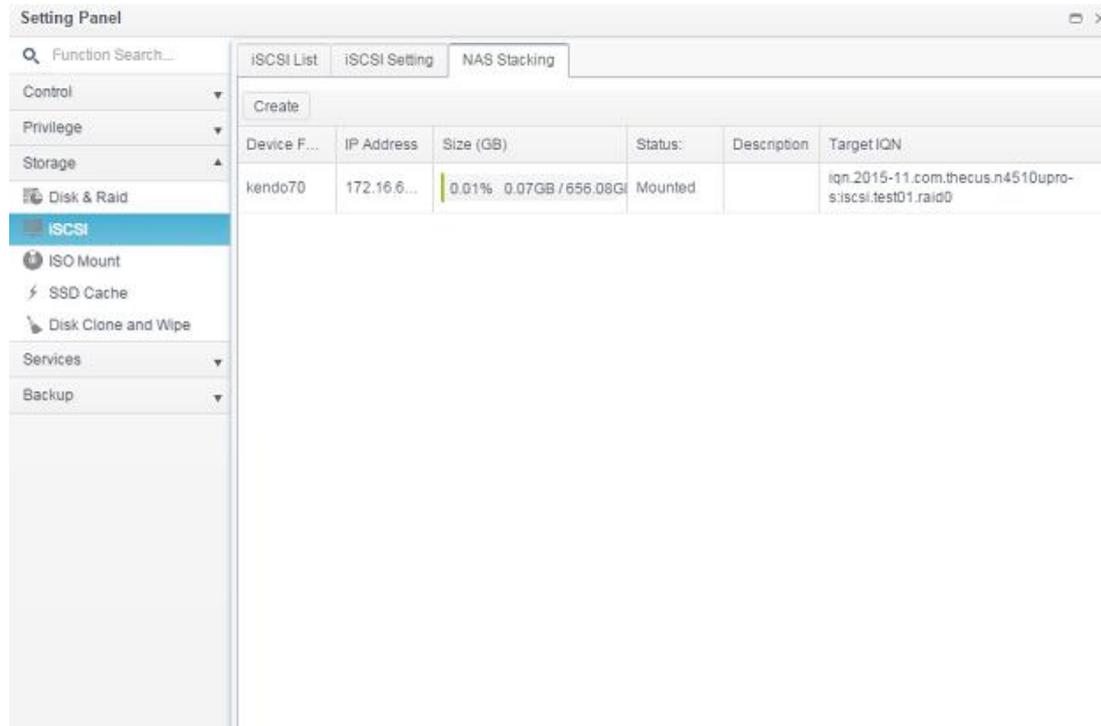


A. Add a Stack Target Volume

From the figure above, click **Create** to access the stackable target device configuration page. Please refer to the figure below:

With the added stack target you can "Enable" or "Disable" the stack target now or later depending on usage required.

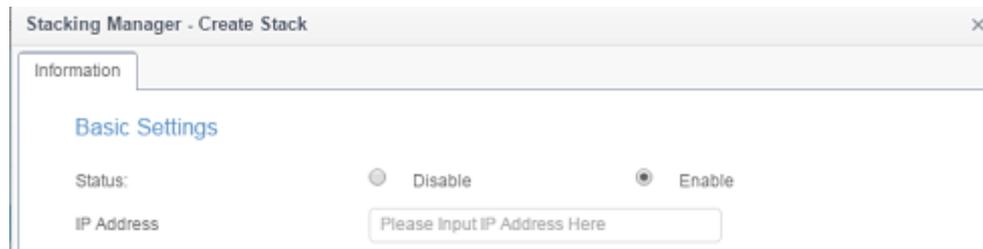

Next, input the target IP address of the stackable device and click the **Discovery Target** button. The system will list available target volumes from the inputted IP address.

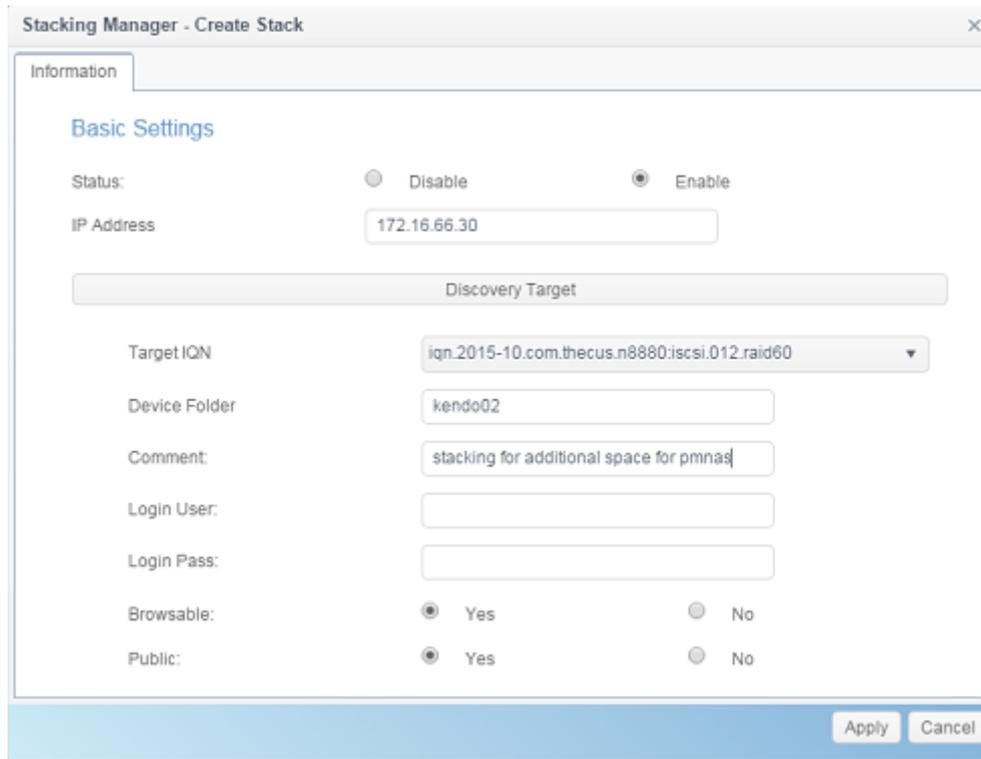


Select Target IQN from drop list which will be the stacking device after connected.

The **Device Folder** will become the network share name and will be displayed through network access such as SMB. You may input **Comment** to tell the subject of this stack folder if needed.

For this associated stacking device, you may need to input a valid user name and password to validate your access rights. If there is no user name and password needed to access target volume, then leave it blank.

From the figure above, the **Device Folder** is "kendo02". The figures below show the result before and after via Microsoft Network Access when settings have been completed.

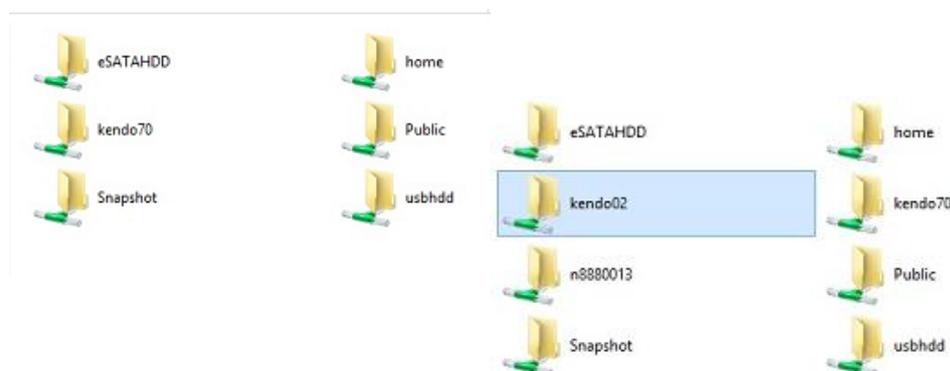

The **Browseable** setting is the same method used for setting a system share folder. It designates whether or not this folder will be visible through web disk. You may refer to the figure below for reference when **Yes** and **No** are selected.

The **Public** setting will be set the same way as the setting for the system share folder associated with the ACL permission is. The sample above of Device Folder "Kendo02" can be found from share folder list.

Folder Name	Create ...	File Sy...	Public	Description	Quota Limit
Snapshot	KendoR5	btrfs	No		*
Public	KendoR5	btrfs	Yes		*
HOME	KendoR5	btrfs	Yes		*
eSATAHDD	KendoR5	btrfs	Yes		*
USBHDD	KendoR5	btrfs	Yes		*
iSCSI_kendo01	KendoR5	btrfs	No	iSCSI Target Folder	*
iSCSI_kendo03	KendoR5	btrfs	No	iSCSI Target Folder	*
iSCSI_kendo04	KendoR5	btrfs	No	iSCSI Target Folder	*
kendo70	KendoR5	btrfs	Yes		*
kendo02	KendoR5	btrfs	Yes	stacking for additional space for pmnas	*
n8880013	KendoR5	btrfs	Yes		--

Click **Apply** to save your changes.

B. Activate a Stack Target

After your settings have been applied, the system will bring you back to the **NAS Stacking List** window as shown below. There is one stack target device that has been attached into this stack master.

With this newly attached stack target device, you will see the information displayed .

Device F...	IP Address	Size (GB)	Status:	Description	Target IQN
kendo02	172.16.6...		Connected	stacking for additional space for pmnas	iqn.2015-10.com.thecus.n8880.iscsi.012.raid60
kendo70	172.16.6...	0.01% 0.07GB / 656.08GB	Mounted		iqn.2015-11.com.thecus.n4510upros.iscsi.test01.raid0

In general, clicking on associated stack target, if the attached stack target device has been used by another Thecus NAS as stack target volume, then the status **Mounted** will be displayed and system will recognize it straight away and display its capacity. Otherwise, the **Connected** will be displayed in **Status**. Now click on associated stack target and you will see the **File System Format** tab appear.

Click on it to proceed with formatting.

iSCSI List					
iSCSI Setting					
NAS Stacking					
Create Edit Reconnect File System Format					
Device F...	IP Address	Size (GB)	Status:	Description	Target IQN
kendo02	172.16.6...		Connected	stacking for additional space for pmnas	iqn.2015-10.com.thecus.n8880.iscsi.012.raid60
n8880013	172.16.6...	0.77% 0.01GB / 0.91GB	Mounted		iqn.2015-10.com.thecus.n8880.iscsi.013.raid60

After the format is completed, the stack target volume will be created successfully. You will see the volume's capacity and status in the **NAS Stacking List** screen.

iSCSI List					
iSCSI Setting					
NAS Stacking					
Create Edit					
Device F...	IP Address	Size (GB)	Status:	Description	Target IQN
kendo02	172.16.6...	0.27% 0.00GB / 0.91GB	Mounted	stacking for additional space for pmnas	iqn.2015-10.com.thecus.n8880.iscsi.012.raid60
n8880013	172.16.6...	0.77% 0.01GB / 0.91GB	Mounted		iqn.2015-10.com.thecus.n8880.iscsi.013.raid60

C. Edit a Stack Target

To make any changes to a stack target, select the corresponding stack target then click **Edit**, and the system will bring up the following dialogue window:

Stacking Manager - Edit Stack

Information

Basic Settings

Status: Disable Enable

IP Address:

Target IQN:

Device Folder:

Comment:

Login User:

Login Pass:

Browsable: Yes No

Public: Yes No


After your changes have been made, click **Apply** to confirm any modifications. Once changes are applied, the associated information will be updated on the **Stack Target List** window.

D. Stack Target ACL

Go to the **System Folder** section with associated **Device Folder** created by NAS stacking. The **ACL** settings will be exactly the same as the system folder that you may have setup previously.

E. Reconnect a Stack Target

This is used to enable stack target devices that may have been disconnected due to a power outage or a disconnected network. When this happens, the **Reconnect** button will become available. To attempt to reconnect the stack target, click **Reconnect**.

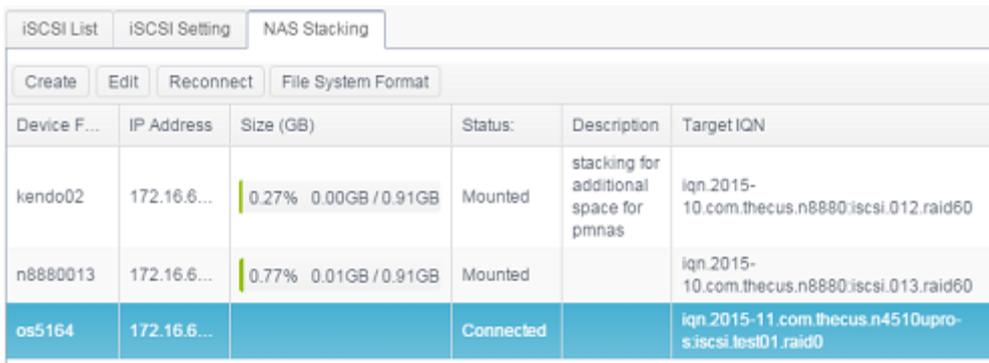

The screenshot shows the 'NAS Stacking' tab in a control panel. At the top, there are tabs for 'iSCSI List', 'iSCSI Setting', and 'NAS Stacking'. Below these are buttons for 'Create', 'Edit', 'Reconnect', and 'File System Format'. The main area contains a table with the following data:

Device F...	IP Address	Size (GB)	Status:	Description	Target IQN
kendo02	172.16.6...	0.27% 0.00GB / 0.91GB	Mounted	stacking for additional space for pmnas	iqn.2015-10.com.thecus.n8880.iscsi.012.raid60
n8880013	172.16.6...	0.77% 0.01GB / 0.91GB	Mounted		iqn.2015-10.com.thecus.n8880.iscsi.013.raid60
os5164	172.16.6...		Connected		iqn.2015-11.com.thecus.n4510upros.iscsi.test01.raid0

ISO Mount

The ISO Mount feature is a very useful tool from the Thecus product line. With it, users can mount an ISO file and have the export name display all the details from the mounted ISO file.

From the Control Panel, the ISO Mount feature is located under "Storage".

Select the **ISO Image** function and the ISO Image Mounting window will appear as shown below.

A. Add an ISO file


Click on the **Add** button and the available system share will appear.



The screenshot shows the 'ISO Mount' window. At the top, there is an 'Add' button. Below it is a table with the following data:

ISO File Name	Path	Size
XenServer-5.6.0-install-cd.iso	/raid/data/ftproot/NAS_Public/myisofile	431MB

To mount the new ISO file, select one ISO file from the associated share list and input the desired mounting name into the "Mount Folder Name" field. Click **Mount** to confirm the completion of the mounting.

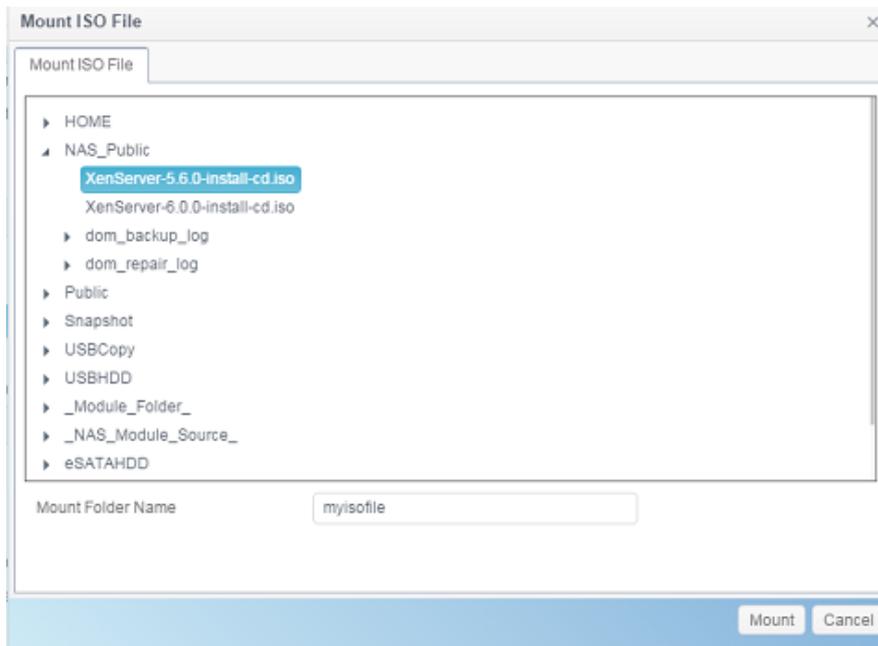

After completion, the page will display all mounted ISO files.




To unmount the image file, select the mounted ISO file from list then click **Unmount** to eliminate a mounted ISO file.



B. Using ISO

The mounted ISO image file will have a folder created from input "Mount Folder Name" and be located in the share folder same as selected ISO file. Please refer the screen shot below and folder "myisofile" can be found.

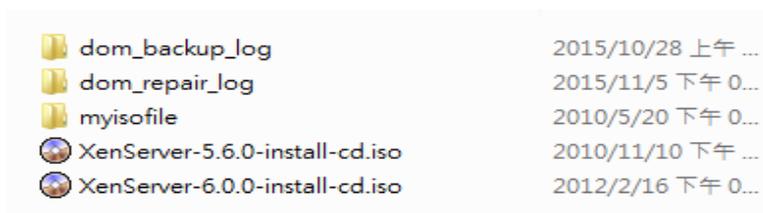

Disk Clone & Wipe

From the Control Panel, the Disk Clone and Wipe feature is located under "Storage".

Select the **Disk Clone and Wipe** function and the unused internal and installed USB disks will list as shown below.

Tray	Model	Capacity	Interface	Status	Log File
2	WDC WD4000F9YZ-0	3726 GB	tray	Completed	Download
23	Transcend 8GB	7.5 GB	usb		
24	DataTraveler 3.0	7.2 GB	usb		

Disk Clone:


Unused Disks and plugin USB disks that have been installed on this storage device can utilize the disk clone function. If disks have already been configured in a RAID volume or as a spare disk, they cannot perform disk clone.

To start disk clone, select the source disk from the Source Disk drop down menu and target a disk from the dialog box as seen below. Carry on to press "Apply," then the task will start after confirmation. It may take a few hours depending on the size of the disk.


Please be sure the source disk is equal to or smaller than the target disk.

Tray	Model	Capacity	Interface	Status	Log File
2	WDC WD4000F9YZ-0	3726 GB	tray	Completed	Download
23	Transcend 8GB	7.5 GB	usb		
24	DataTraveler 3.0	7.2 GB	usb		

Apply

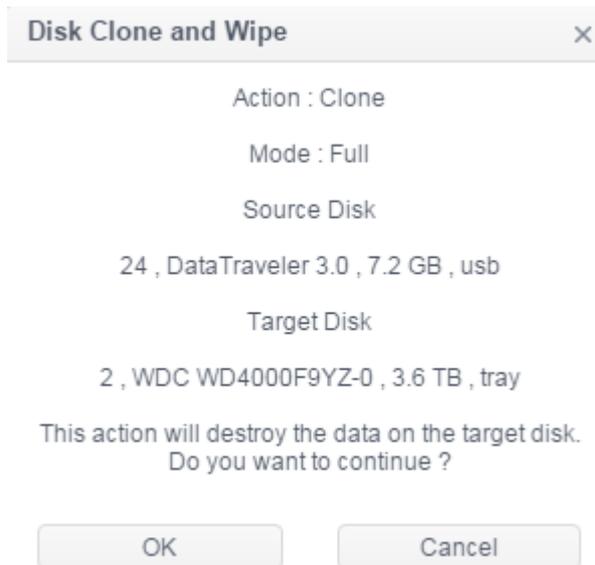


The task will list and status as shown below.

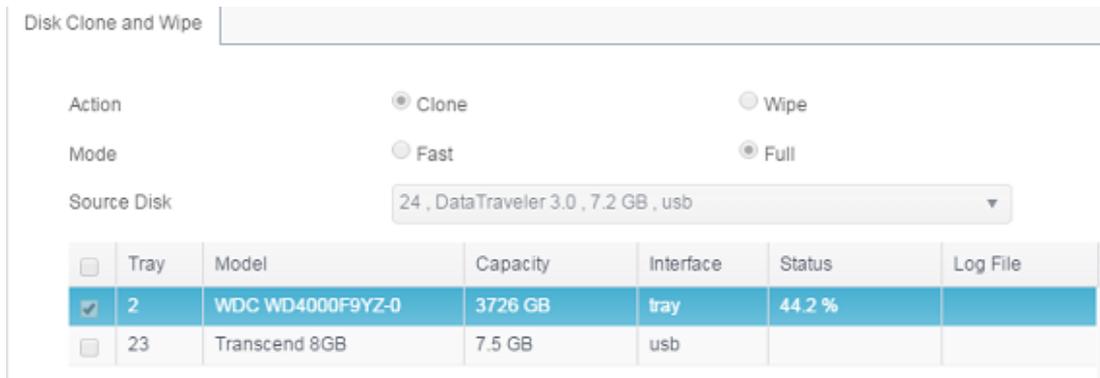

Disk Wipe:

Disk Wipe is able to erase data from selected disks. Again, disks that have already been configured in a RAID volume or as a spare disk cannot perform this function.

To start disk wipe, select the disk from the list and carry on to press "Apply," then the task will start after confirmation. It may take a few hours depending on the size of the disk.

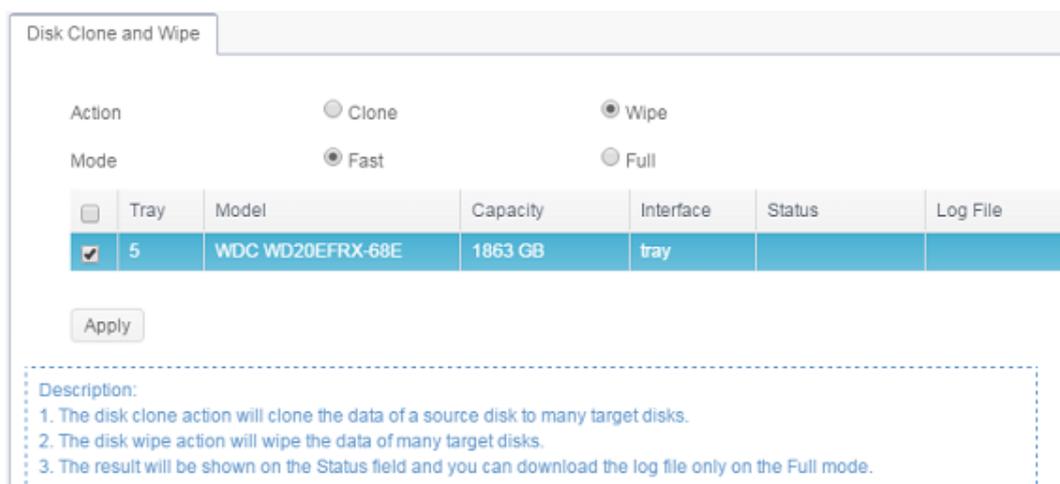


The task will list and status as shown below.



<input type="checkbox"/>	Tray	Model	Capacity	Interface	Status	Log File
<input checked="" type="checkbox"/>	5	WDC WD20EFRX-68E	1863 GB	tray	0.4 %	

Disk Clone and Wipe	
Item	Description
Action	Click to choose to perform Disk Clone or Disk Wipe
Mode	2 options can be chosen: Fast: suitable for single disk to many tasks but less information to be displayed Full: suitable for single to single disk operation and will have a complete log recorded during operation
Source Disk	Listed available disks can be used as the source disk while performing disk clone
Target Disk	Listed available disks can be used for disk clone or disk wipe
Apply	To save your settings.

Services

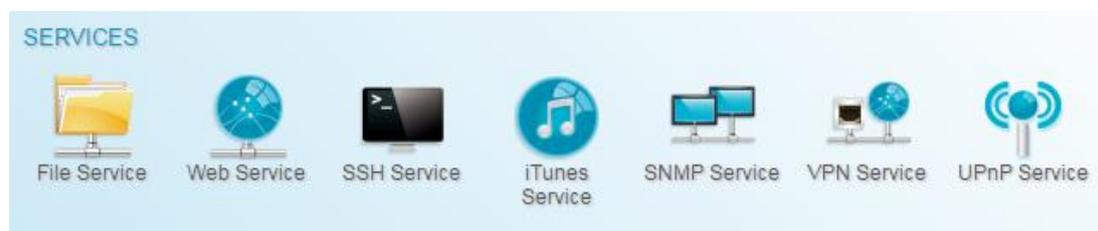


Use the Services menu to make network service support settings.

File Service

Samba

There are options allow Admin to Enable/Disable to operate Thecus IP storage associated with Samba / CIFS protocol.

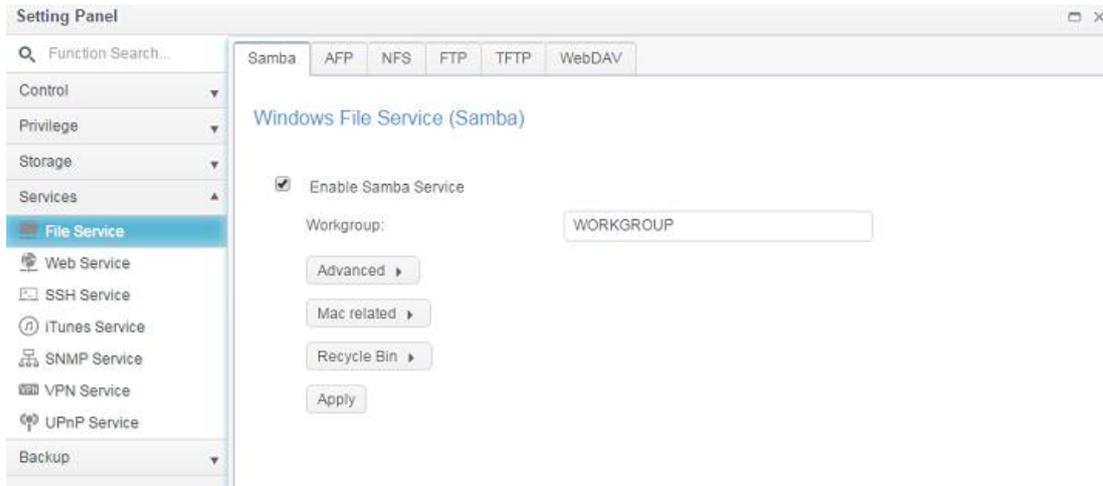


Samba Service

Used for letting the operating system of UNIX series and SMB/CIFS of Microsoft Windows operating system (Server Message Block / Common Internet File System). Do the link in network protocol. Enable or Disable SMB/CIFS protocol for Windows, Apple, Unix drive mapping.

NOTE

- In some environments, due to security concerns, you may wish to disable SMB/CIFS as a precaution against computer viruses.

For more options related to the Samba option, please click **Advanced** for details.

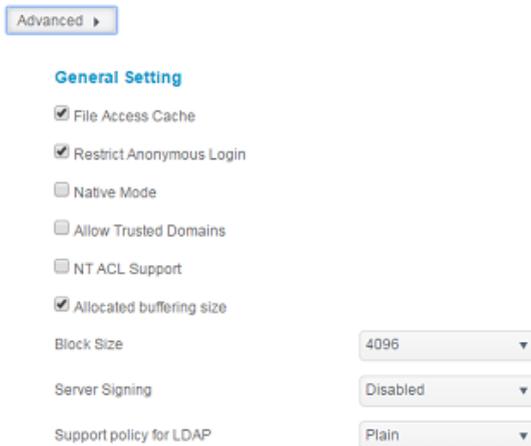

File Access Cache

File Access Cache is default **Enable**. This option will help to increase the performance while single client access the share folder in writing under SMB/CIFS protocol.

Restrict Anonymous Login

To enable this option, no matter there is share folder has been created in public access. The user account and password is needed from system to access under SMB/CIFS protocol. On the other hand, no more anonymous login is allowed.

Native Mode

The Thecus IP storage is supported Samba mode options. In the ADS environment with "Native" mode selected then Thecus IP storage is capable to become local master position.

Allowed Trusted Domain

This is useful if you only want your Samba server to serve resources to users in the domain it is a member of. As an example, suppose that there are two domains DOMA and DOMB. DOMB is trusted by DOMA, which contains the Samba server. Under normal circumstances, a user with an account in DOMB can then access the resources of a UNIX account with the same account name on the Samba server even if they do not have an account in DOMA. This can make implementing a security boundary difficult.

NT ACL Support

This setting controls whether Samba will attempt to map UNIX permissions into Windows NT access control lists.

Allowed Buffering Size (Block Size)

This function controls the behavior of Samba when reporting available disk space. This function was added to allow advanced administrators to increase block size to increase write performance without re-compiling the code.

Disabled= 4k Enabled=256k

Server Signing

This is setting while Samba server has been used in US of FDCC. If the system has used only in Windows environment choose "Mandatory" otherwise "Auto".

is Support policy for LDAP

The client LDAP sasl wrapping defines whether ldap traffic will be signed or signed and encrypted (sealed). Possible values are *plain*, *sign* and *seal*.

For Mac related option, please click on "Mac Related" for details.



UNIX Extension

The default is enabled for Samba usage, if there is a situation with using Mac OSX with smb connection, it may have permission issue. When it happens, please setup "UNIX Extension" disable to get issue solved.

Hide Temporary File

This is a list of files or directories that are not visible but are accessible

For Samba Recycled Bin related setting, please see below.

Recycle Bin ▶

Recycle Bin

Enable Recycle Bin

Display Folder

Auto Deleted ▲▼ days

Max File Size ▲▼ GB

The thecus IP storage is supported recycle bin via SMB/CIFS protocol.

Simply enable the "Recycle Bin" function and "Recycle Folder Display" then all of deleted files/folders will reside in the "_NAS_Recycle_(Associated RDID Volume)" share folder.

For example, the system has created 2 RAID volumes with ID "RAIDpm" and "RAID". Then it will have 2 recycle bin folder appear as "_NAS_Recycle_RAID" and "_NAS_Recycle_RAIDpm".



There are 2 more settings could help to manage the recycle bin for deleted folders/files.


1. Setup the "Day" to remove deleted folders/files which has resided in recycle bin permanently. Left default value "0" if desired to clean up recycle bin manually.
2. Setup the "Size" for recycle bin to allow deleted folders/files can store. Left default value "0" with no limitation.

NOTE

- The deleted files/folders which have resided in recycle bin will keep its permission. On the other hand, only the admin and owner can view/read/write these folders/files.
- If deleted single file size is large than 2GB then it won't reside in the recycle bin but erase permanently.

AFP

From the **File Services** menu, choose the **AFP** item, and the **AFP Support** screen appears. This screen displays the configuration items for the Apple Filing Protocol. You can change any of these items and press **Apply** to confirm your settings.

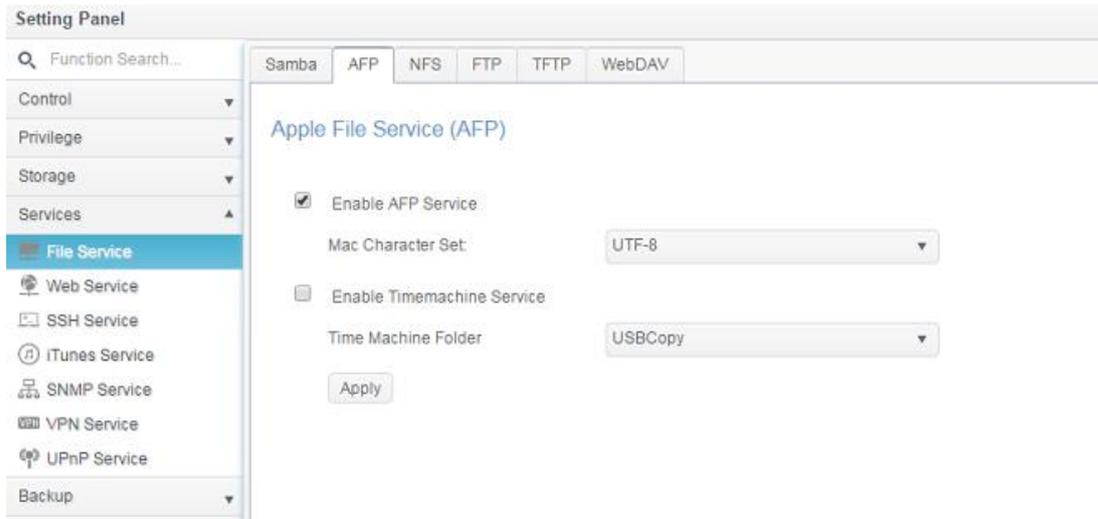


A description of each item follows:

Apple Network Configuration	
Item	Description
AFP Server	Enable or disable Apple File Service to use the Thecus IP storage with MAC OS-based systems.
MAC CHARSET	Specifies the code page from the drop down list.
Zone	Specifies Zone for Appletalk service. If your Appletalk network uses extended networks and is assigned with multiple zones, assign a zone name to the Thecus IP storage. If you do not want to assign a network zone, enter an asterisk (*) to use the default setting.
Time Machine	Click the enable checked box if you would like your MAC system to use the Thecus IP storage as MAC time machine backup.
Time Machine backup folder	Select from the drop down list to designate the folder for time machine backup destination.

NFS

From the **File Service** menu, choose the **NFS** item, and the **NFS Support** screen appears. The Thecus IP storage can act as an NFS server, enabling users to download and upload files with their favorite NFS clients. Press **Apply** to confirm your settings.

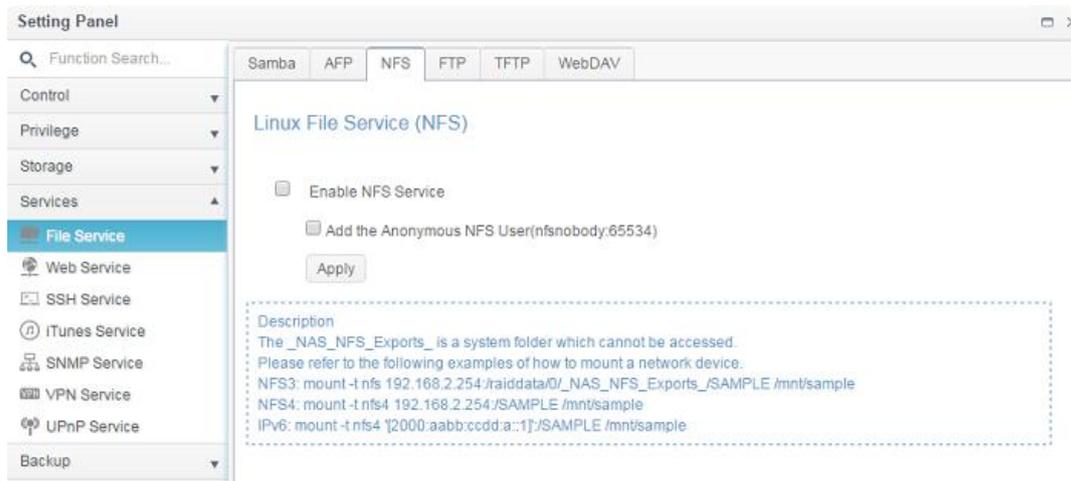


A description of each item follows:


NFS Server Setting	
Item	Description
NFS	Enable or Disable NFS support.
NFS Threads	Choose the number of NFS threads.
Advanced	Checked to add the Anonymous NFS User.
Apply	Click Apply to save your changes.

FTP

The Thecus IP storage can act as an FTP server, enabling users to download and upload files with their favorite FTP programs. From the **File Service** menu, choose the **FTP** item, and the **FTP** screen appears. You can change any of these items and press **Apply** to confirm your settings.

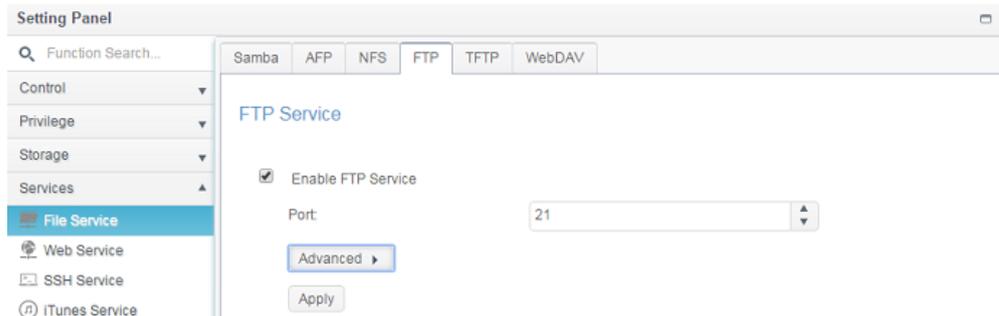

Click on "Advanced" button to have more setting details.

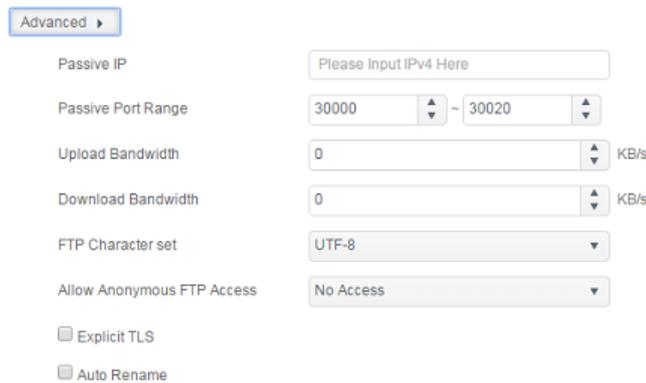

A description of each item follows:

FTP	
Item	Description
FTP	Enables FTP Service on the Thecus IP storage.
Port	Specifies the port number of an incoming connection on a non-standard port.
Passive IP	Input the public IP address of the router when the Thecus secure FTP server has been enabled. This can help to respond to the ftp client with proper communication information.
Passive Port Range (30000-32000)	Limited port range for the FTP server to use.
FTP ENCODE	If your FTP client or operating system does not support Unicode (e.g. Windows® 95/98/ME or MAC OS9/8), select the same encoding as your OS here in order to properly view the files and directories on the server. Available options are BIG5, HZ, GB2312, GB18030, ISO, EUC-JP, SHIFT-JIS and UTF-8.
Allow Anonymous FTP	Upload/Download: Allow anonymous FTP users to upload or

Access	download files to/from public folders. Download: Allow anonymous FTP users to download files from public folders. No access: Block anonymous FTP user access.
Upload Bandwidth	You may set the maximum bandwidth allocated for file uploads. Selections include Unlimited, 1 ~ 32 MB/s.
Download Bandwidth	You may set the maximum bandwidth allocated for file downloads. Selections include Unlimited, 1 ~ 32 MB/s.
Explicit TLS	Enable or disable Security TLS, be sure the client FTP software has also security TLS setting enabled.
Auto Rename	If checked, the system will automatically rename files that are uploaded with a duplicate file name. The renaming scheme is [filename].#, where # represents an integer.

TFTP

Thecus IP storage can act as a TFTP server, enabling users to download and upload files with their favorite TFTP programs. From the **File Service** menu, choose the **TFTP** item, and the **TFTP** screen appears. You can change any of these items and press **Apply** to confirm your settings.




A description of each item follows:

TFTP	
Item	Description
TFTP	Enables TFTP Service on the Thecus IP storage.
IP	Checked WAN/LAN1 or LAN2 to enable port use
Port	Specifies the port number of an incoming connection on a non-standard port.
Share Folder	Select the file stored folder, it cannot be empty.
Folder Permission	Select the folder permission

WebDAV

The WebDAV is an extended protocol of http(s) which allows remote access to your NAS system.


To begin using WebDAV and WebDAV SSL, simply click enable and provide the port number. The default port number is 9800, under normal circumstances this will not need to be changed.

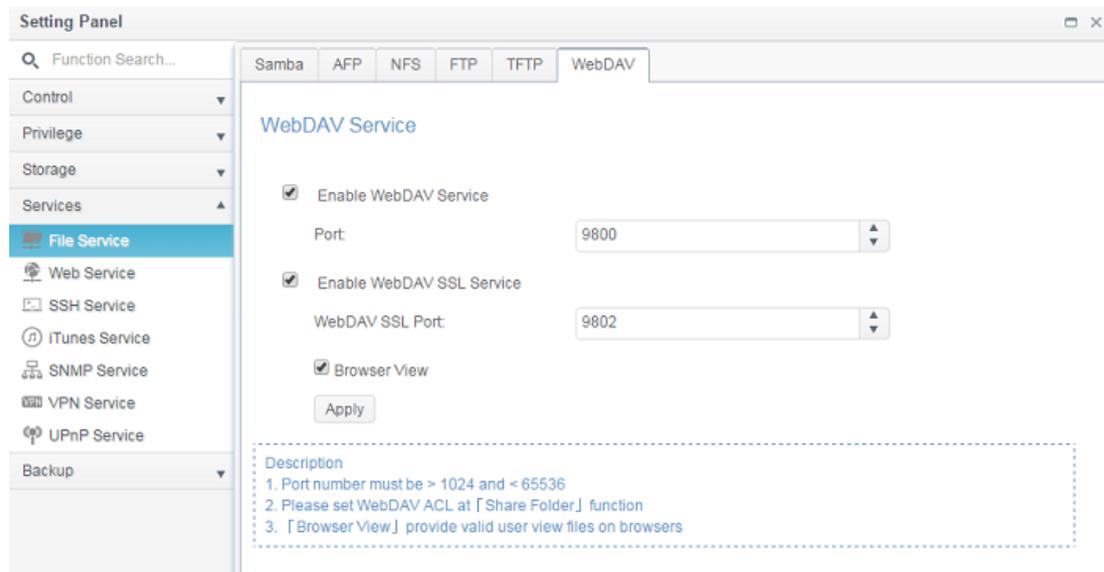

WebDAV Configuration	
Item	Description
WebDAV Service	Press the Enable button to activate WebDAV service and specify the port number if it needs to change from the default value. P.S. Port number is limited to greater than 1024 and less than 65536
WebDAV SSL Service	Press the Enable button to activate WebDAV SSL service and specify the port number if it needs to be changed from the default value. P.S. The port number is limited to greater than 1024 and less than 65536
Browser View	Press the Enable button and viewing the share folder list through the browser will be allowed
Apply	Click "Apply" to confirm the changes.

Web Service

From the **Services** menu, choose the **Web Service** item, and the **Web Service** screen appears. This screen displays the service support parameters of the system. You can change any of these items and press **Apply** to confirm your settings.

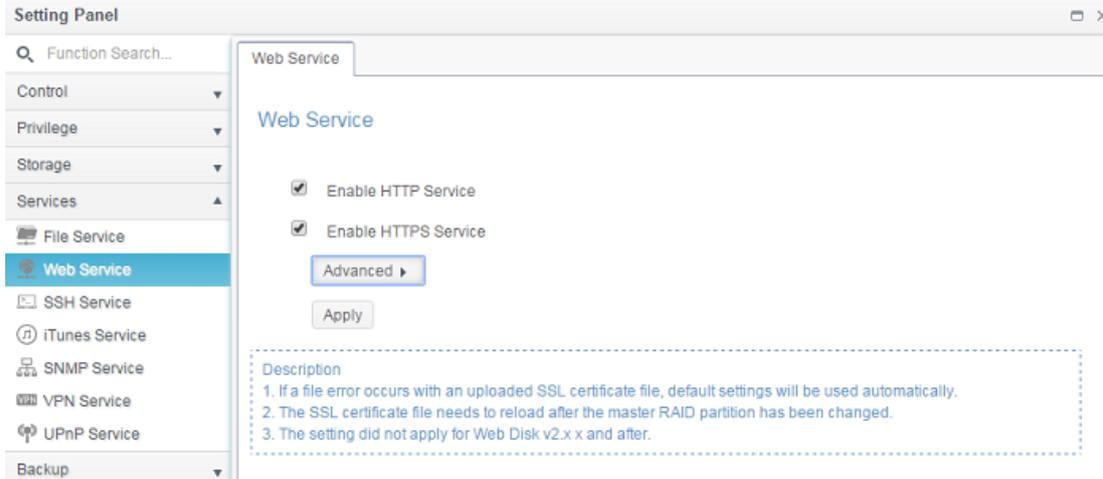

Click on the **Advanced** button to have more setting details.

A description of each item follows:

Web Service	
Item	Description
HTTP (WebDisk) Support	Enable or disable WebDisk support. Enter the port number if this option is enabled. The port number is default 80.
HTTPs (Secure WebDisk) Support	Enable or disable secure WebDisk support. Enter the port if this option is enabled.
Certificate Type	Select "User" if there is available Certification ID ex. Apply from VeriSign. Or using system default by select "System".
Certificate File	Upload Certificate File if choose Certificate type "User".
Certificate Key File	Upload Certificate Key File if choose Certificate type "User".


CA Certificate File	Upload CA Certificate File if choose Certificate type "User".
Restore All SSL Certificate Files	Click to set back to default certification details.
Apply	Click "Apply" to confirm the changes.

NOTE


- Disable HTTP support and Enable Secure HTTP support to guarantee secure access.

SSH Service

The device is now SSH protocol supported. It allows user to use SSH and have console to manipulate as needed. The SSH default login user name is "root" with full privilege and password is admin's password. The default admin password is "admin" so once the admin password has changed then SSH login need to change the password too.

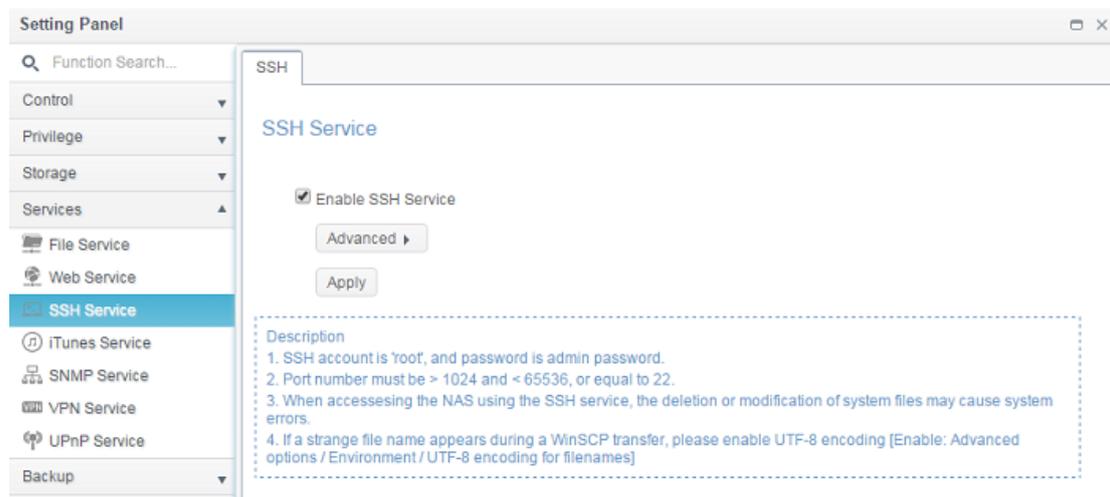

Click on **Advanced** button to have more setting details.

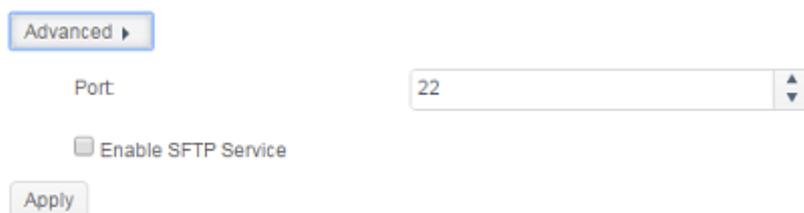

A description for each item as following:

SSH	
Item	Description
SSH Service	Enable or disable SSH service.
Port	The port number is default 22.
SFTP	Enable or disable SFTP protocol under SSH service.
Apply	Click "Apply" to confirm the changes.

iTunes Service

With the built-in iTunes server capability, Thecus IP storage enables digital music to be shared and played anywhere on the network!

From the **Services** menu, choose the **iTunes Service** item, and the **iTunes Server Configuration** screen appears. You may enable or disable the iTunes

Service from here. Once enabled, enter the proper information for each field and press **Apply** to save your changes.



Click on “Advanced” button to have more setting details.



See the following table for a detailed description of each field:

iTunes Configuration	
Item	Description
iTunes Service	Enable or disable the iTunes Service.
iTunes Server Name	Name used to identify Thecus IP storage to iTunes clients.
Password	Enter a password to control access to your iTunes music.
Rescan Interval	Rescan interval in seconds.
Tag Character Set	Specify tag encoding for MP3 files stored in Thecus IP storage. All ID3 tags will be sent out in UTF-8 format.
Music Folder	Select from drop down list for music location of associated iTunes server on the network

SNMP Service

From the **Services** menu, choose the **SNMP** item and the **SNMP Support** screen appears. You could enable the SNMP function and fill in the related information in each field. With the SNMP management software, you can get other system's basic information.

The screenshot shows the 'Setting Panel' window with the 'SNMP Server' tab selected. The left sidebar contains a 'Services' menu with 'SNMP Service' highlighted. The main content area is titled 'SNMP Server' and includes the following fields:

- Enable SNMP
- Read Community:
- System Contact:
- System Location:
- Trap Target IP 1:
- Trap Target IP 2:
- Trap Target IP 3:

An 'Apply' button is located at the bottom of the configuration area.

VPN Service

VPN Server

This storage device provides VPN server service and this allows remote access to this device via a secure connection. Settings can be found in the "VPN Service" tab as seen below

The screenshot shows the 'Setting Panel' window with the 'VPN Server' tab selected. The left sidebar contains a 'Services' menu with 'VPN Service' highlighted. The main content area is titled 'VPN Server' and includes the following fields:

- Enable VPN Server
- VPN Client IP Pool: ~
- VPN Server Remote IP:
- Authentication:
- IKE Authentication**
- Pre-shared Key:
- Network Interface:

An 'Apply' button is located at the bottom of the configuration area.

Description

- Port 50, 500, 1701, 4500 are VPN ports. Please open them on the router/firewall or if you use a direct internet connection or a firewall connection.
- If the VPN client's platform is Windows, please modify the registry by reference - <http://support.microsoft.com/kb/258261/en-us>


To setup your VPN server you must first choose the NIC interface from the drop down menu and complete the rest of the necessary information.

Below is a description of each item:


VPN Server	
Item	Description
Enable VPN Server	Check to enable VPN server service
VPN Client IP Pool	Input the IP range for client IP.
VPN Server remote IP	Input the IP for the VPN server for VPN client connection
Authentication	The default is PAP, can't change.
IKE Authentication	Internet Key Exchange for authentication while connection is made.
Pre-shared key	Input the key for connection authentication in between VPN client and server.
Network Interface	Select the NIC interface to use for VPN server
Apply	Click "Apply" to confirm the changes.

Client Management

For the VPN client access control, simply click on "Client Management" tab. It will list all the users on this system and default **"not allowed"** for VPN connection.

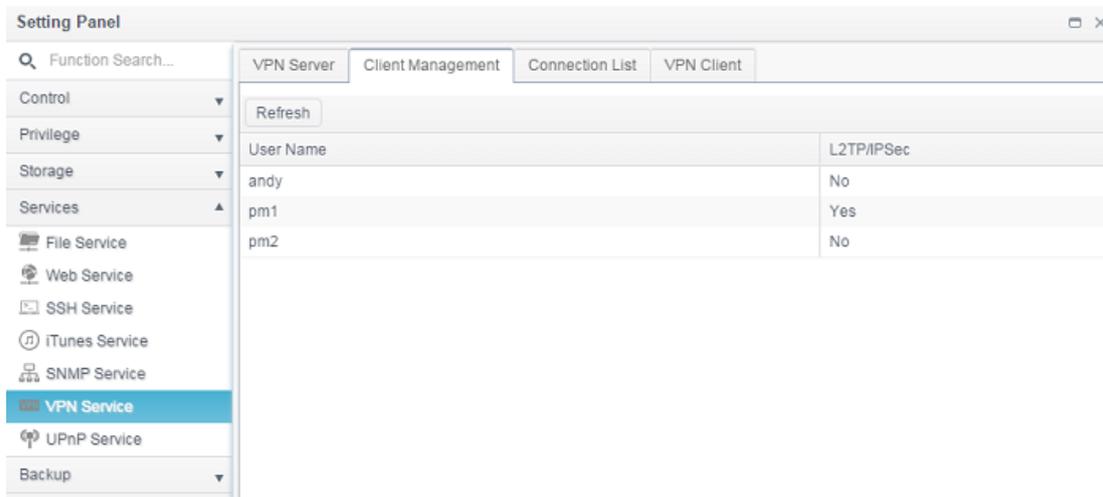

Click on associated user and **Edit** button to change the accessibility.

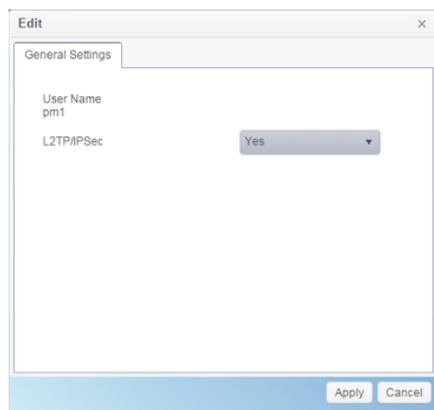


Connection List

To get the on-line connection list, click on the "Connection List" tab. It will display connected users with associated connection information.

NOTE


The VPN server only supports L2TP/IPSec connection.

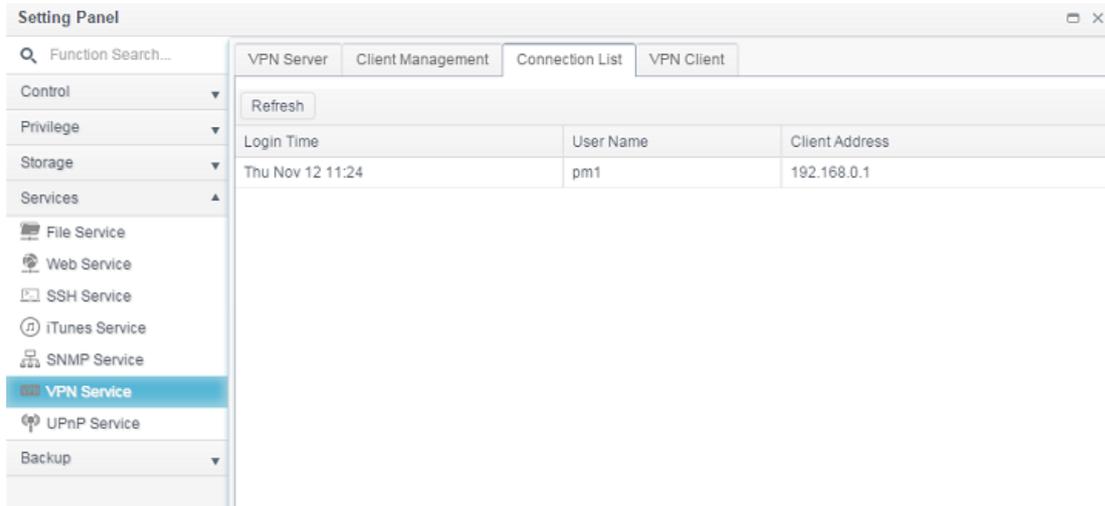

NOTE The VPN server only supports L2TP/IPSec connection.

VPN Client

To have this storage device join a Virtual Private Network, simply provide a VPN server IP address and a valid login user name and password. Once the input information has been confirmed, the connection will be made. This storage device will be capable of playing a role as a local device to communicate with other systems.

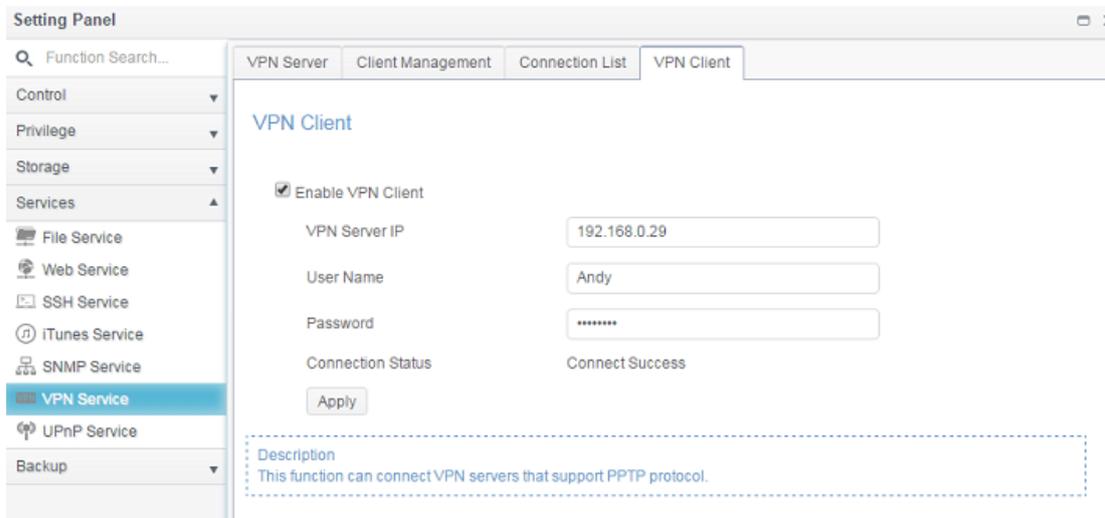


NOTE Please notice that the connection to the VPN server only supports PPTP.

UPnP Service

UPnP


This device supports UPnP Media server, which allows users to play media files with UPnP client (ex. DMA devices). Enable or disable Universal Plug and Play protocol. UPnP helps to find the IP address of Thecus IP storage.

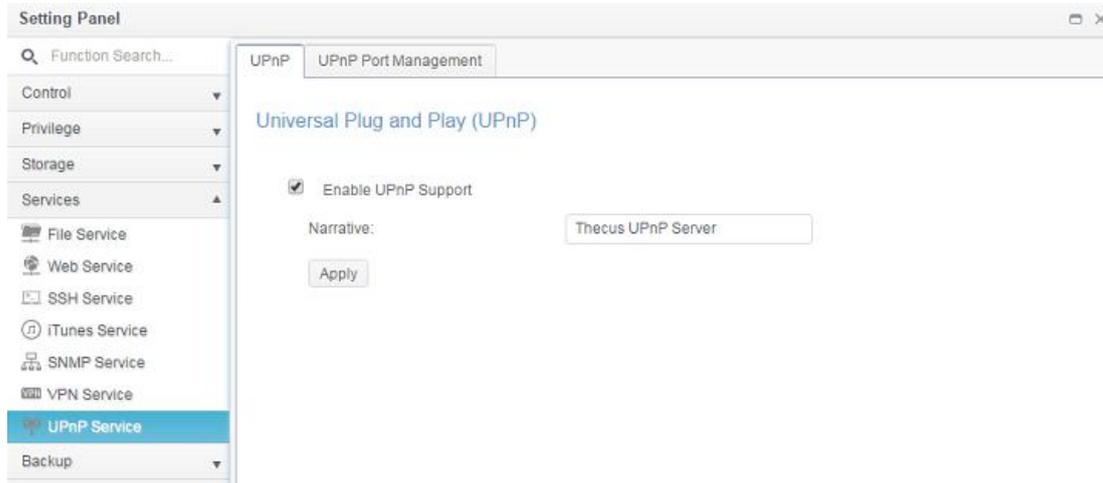


UPnP Port Management

One of the most convenient ways to allow users to access required services such as FTP, SSH, web disk and http etc. from Internet environment is setting UPnP port management.


To set up this UPnP port forwarding feature, please be sure that the router has "UPnP Service" Enabled. The following is an example from one of the router manufacture with UPnP Configuration page.

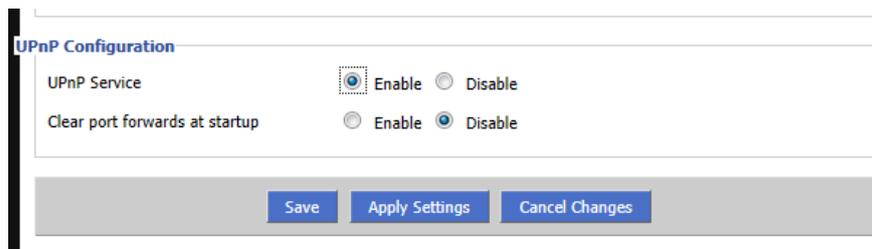

After the router has enabled "UPnP Service" then you will have information come from associated router to UPnP port management as shown in the screen shot below.

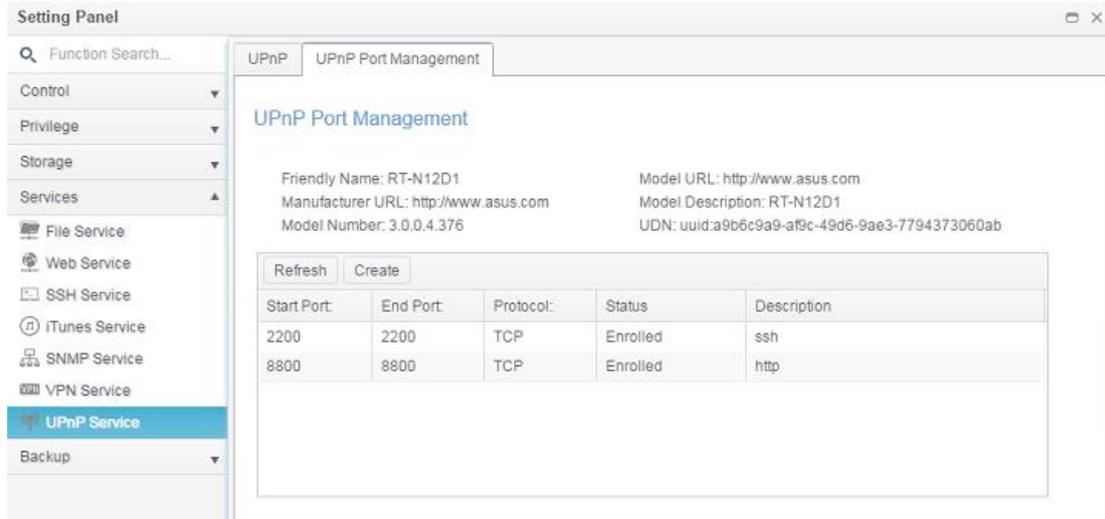

Click "Create" to add more port mapping from Internet to access desired services or press "Refresh" to get most updated list.

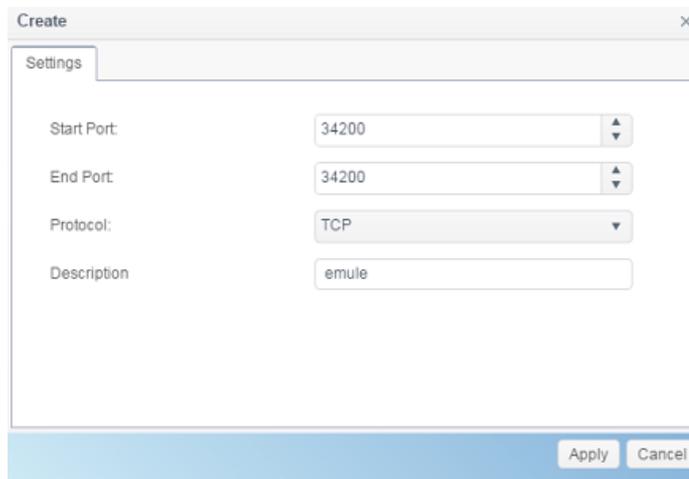

A description for each item as follows:

UPnP Port Management	
Item	Description
Start port	Specific port number starts with.
End port	Specific port number ended
Protocol	Choose the protocol for port forwarding needed.
Description	Specific the port services if applicable.
Apply	Click "Apply" to confirm the changes.
Cancel	Click "Cancel" to abort the changes

WARNING

Some of the routers do not allow the input of port number below 1024. So it may have resulted "setting fails".

To modify or remove listed role, click on associated item then press **Edit** to carry on necessary action.

UPnP Port Management

Friendly Name: RT-N12D1
 Manufacturer URL: <http://www.asus.com>
 Model Number: 3.0.0.4.376

Model URL: <http://www.asus.com>
 Model Description: RT-N12D1
 UDN: uuid:a9b6c9a9-af9c-49d6-9ae3-7794373060ab

Start Port:	End Port:	Protocol:	Status	Description
2200	2200	TCP	Enrolled	ssh
8800	8800	TCP	Enrolled	http

Backup



Local Backup

(Remote Backup/details in next section) (Local Backup)

Setting Panel

Function Search...

Control

Privilege

Storage

Services

Backup

Local Backup

Remote Backup

Local iSCSI

Add


Status	Task...	Source Folders	Target	Type	Syn...	Last Run Time	Curre...
Disa...	Publ...	Public	PMTeam	Sch...	Sync	--	Manual Stop

Local File/Folder Backup


Add Task:

From "Local" tab click on **Add** button and the setting screen will appear as below. Follow the steps to complete the setting.

1. Choose backup target folder, this is the destination where the files/folders backup to.

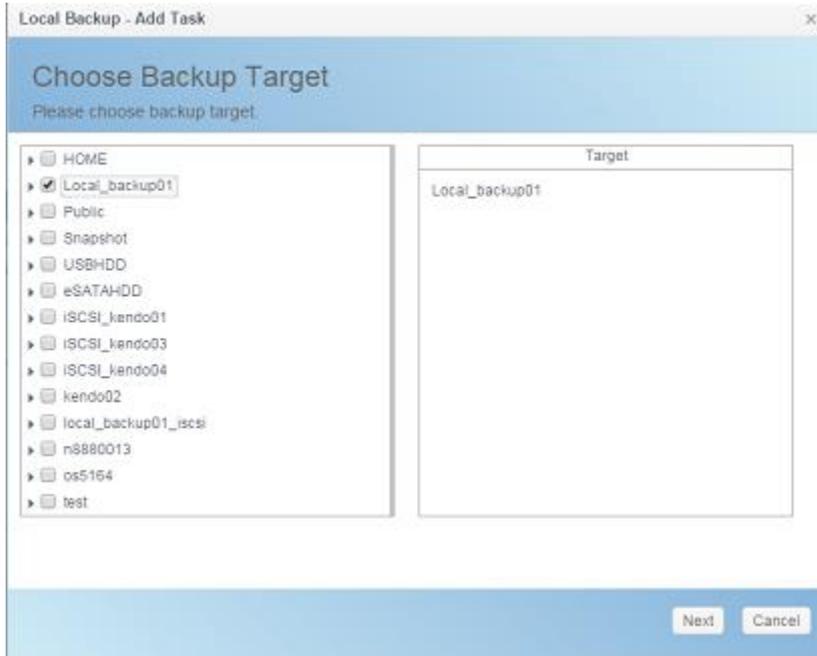

2. Choose source folder to backup. The multiple folders selection is allowed.

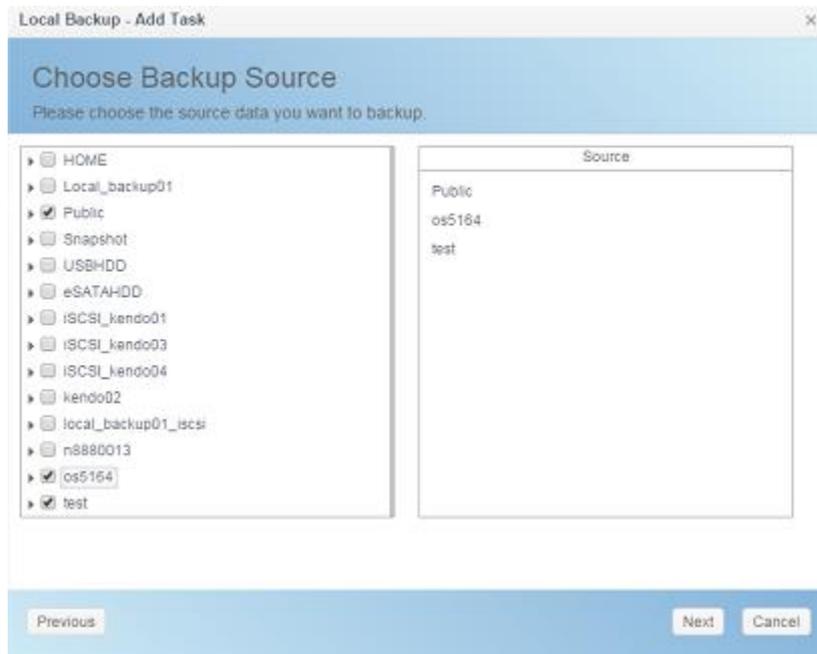

3. Input task name and related options.

Local Backup - Add Task

Detail Settings

Please fill up the settings:

Task Name:

Activate: Disable Enable

Sync Type: Sync Incremental

Schedule Type: Schedule Real Time

Log File Location:


Enable Schedule

Frequency:

Time: :

Add Rsync Backup Task	
Item	Description
Task Name	This is how this task will appear in the task list.
Activate	Enable to activate task or disable to execute later.
Sync Type	<p>Sync mode: Makes your source match your target completely; deleting and adding files on your target as they are deleted and added on your source.</p> <p>Incremental Mode : Makes your source match your target and keep all old files; adding files on your target as they are added on your source, but NOT deleting files on your target as they are deleted on your source.</p>
Schedule Type	<p>Real time: It will backup folders/files from source to target on the fly. On the other hand, any changes from the source will back up to the target right away.</p> <p>Schedule: The task will start only according to the schedule.</p>
Log Location	Choose the folder to save the log details while the task is executed.
Enable Schedule	If backup is set as "Schedule", please input the related period and time.

4. More advanced settings

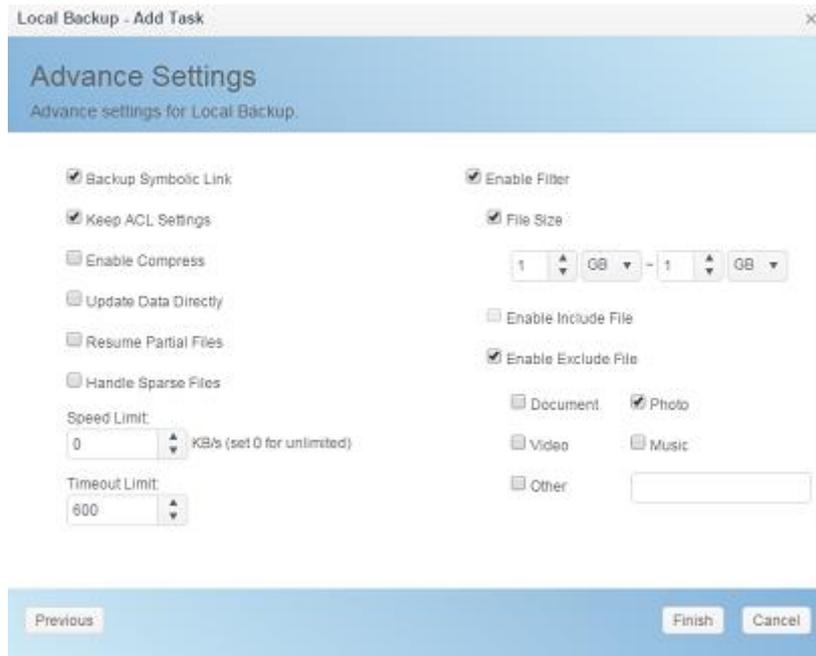

5. Click Finish to complete task added.

Add Rsync Backup Task	
Item	Description
Backup Symbolic Link	
Keep ACL Setting	It will backup not just data itself but also ACL configuration with associated folders/files.
Enable Compress	With this option, compress the file data as it is sent to the destination machine, which reduces the amount of data being transmitted – something that is useful over a slow connection.
Update Data Directly	It could by pass temp file creation wile copy file from source to destination. It will more efficiency but risky if any interrupt during operation.
Resume Partial File	Enable this could keep the partial file which should make a subsequent transfer of the rest of the file much faster
Handle Sparse File	Try to handle sparse file efficiently so they take up less space on the destination.
Speed Limit	Input the bandwidth control for data backup operation.
Timeout Limit	Setup the timeout when trying to build up a connection in between the source and the target system.
Enable Filter	<p>The filter can be set to be executed only in certain circumstances. If none of them has been selected, it will do the backup from the source to the destination in full.</p> <p>File size: From xx ~ xxx If xx=1 and xxx blank then only file size > xx will execute real time backup. If xx=1 and xxx=2 then only size in between xx and xxx will execute real time backup. If xx blank and xxx=2 then only file size < xxx will execute real time backup.</p> <p>Include File Type: Only the associated file format will do the real time backup.</p>

	<p>Exclude File Type: The excluded file format won't be included in the real time backup.</p> <p>For document file format: doc, xls, pdf, docx, xlsx, txt, ppt, pptx, html, htm</p> <p>For picture file format: jpg, bmp, tif, png, pbm, tga, xar, xbm</p> <p>For video file format: avi, mpg, mp4, mkv, flv, flv, rm, ram</p> <p>For music file format: mp3, wav, wma, acc, dss, msv, dvf, m4p, 3gp, amr, awb</p> <p>User defined can be input in other box.</p>
--	---

Edit Task:

To edit created task, select desired item and click on **Edit**.

Local		iSCSI					
Add		Edit					
Status	Task...	Source Folders	Target	Type	Syn...	Last Run Time	Curre...
Enable	test	Public	test	Sch...	Sync	2015/11/23 16:16	Finish
Disa...	MyFi...	Public, os5164, test	Local_backup01	Sch...	Sync	--	Manual Stop

Then you can follow the task creation wizard to do the necessary modification.

Start Task:

If the task has status Enabled, it can be selected and click on Start button to execute right away.

Local		iSCSI					
Add		Edit		Start		Restore	
Status	Task...	Source Folders	Target	Type	Syn...	Last Run Time	Curre...
Enable	test	Public	test	Sch...	Sync	2015/11/23 16:16	Finish
Disa...	MyFi...	Public, os5164, test	Local_backup01	Sch...	Sync	--	Manual Stop
Enable	local...	Snapshot	Public	Sch...	Sync	--	Manual Stop

Restore Task:

To restore a backup from the backup task, simply select a task from the task list then click "Restore" from the function bar. The restore task will start to have the associated files/folders from the target folder restored to the source.

Status	Task...	Source Folders	Target	Type	Syn...	Last Run Time	Curre...
Enable	test	Public	test	Sch...	Sync	2015/11/23 16:16	Finish
Disa...	MyFi...	Public, os5164, test	Local_backup01	Sch...	Sync	--	Manual Stop
Enable	local...	Snapshot	Public	Sch...	Sync	--	Manual Stop

NOTE

- To restore task with backup type set as "Real time", first you need to stop the task then you can proceed with the restore operation.

iSCSI Backup


From "iSCSI" tab click on "Add" button and the setting screen appear as below. Follow the steps to complete the setting.

The screenshot shows a 'Setting Panel' window with a sidebar on the left containing categories like Control, Privilege, Storage, Services, and Backup. The 'Backup' category is expanded, showing options like Local Backup, Remote Backup, Rsync Service, USB Copy, AWS S3, and System Failover. The 'Local Backup' option is selected. The main area shows the 'iSCSI' tab with an 'Add' button and an 'Import' button. Below this is a table with the following data:


Status	Task...	Source Folders	Target	Type	Task Type	Last Run Time	Curre...
Enable	MyFi...	iSCSI_kendo01, iSCSI_kendo03, iSCSI_kendo04	local_backup0...	Sch...	Backup Task	--	Manual Stop

Add Task:

1. Choose backup target folder, this is the destination where the iSCSI volume will backup to.

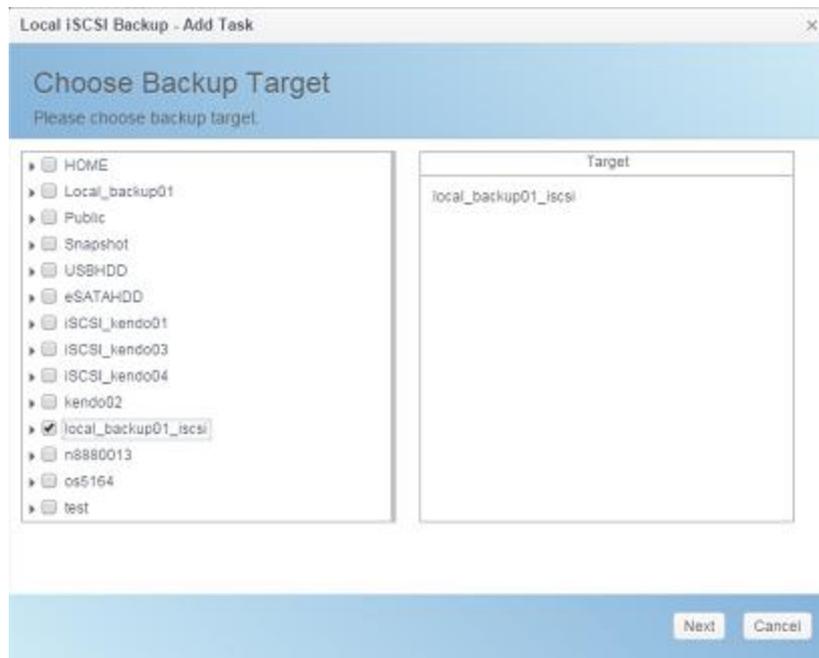

2. System will list available iSCSI volume, choose source iSCSI volume to backup. The multiple iSCSI volume selection is allowed.

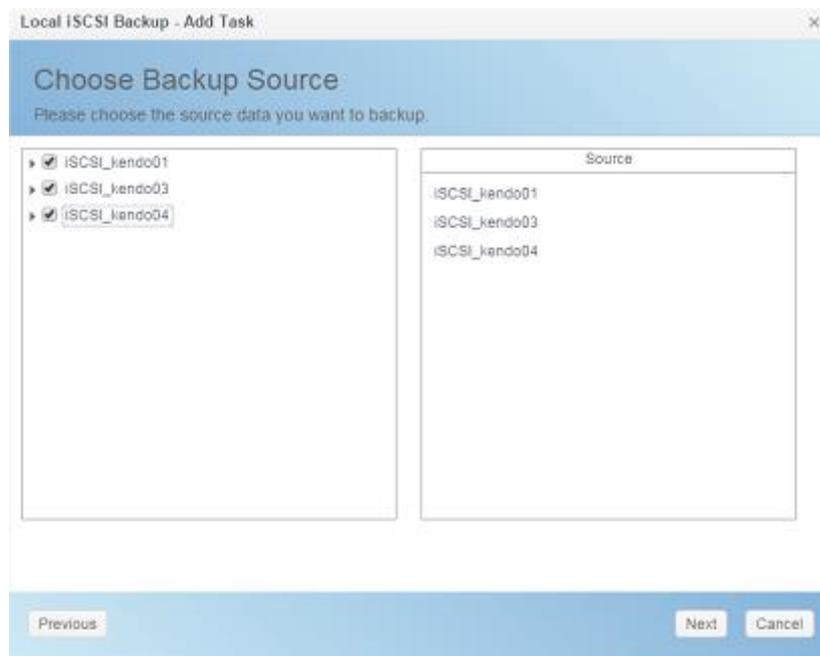

3. **Input** task name and related options.

Add Rsync Backup Task	
Item	Description
Task Name	This is how this task will appear in the task list.
Activate	Enable to activate task or disable to execute later.
Log Location	Choose the folder to save the log details while the task is executed.
Speed Limit	Input the bandwidth control for data backup operation.
Timeout Limit	Setup the timeout when trying to build up a connection in between the source and the target system.
Update Data Directly	It could by pass temp file creation wile copy file from source to destination. It will more efficiency but risky if any interrupt during operation.
Enable Schedule	If backup is set as "Schedule", please input the related period and time.

4. Click **Finish** to complete task added.

Edit Task:

To edit created task, select desired item and click on **Edit**.

Status	Task...	Source Folders	Target	Type	Task Type	Last Run Time	Curre...
Enable	local...	iSCSI_kendo03	local_iscsi_backup01	Sch...	Backup Task	2015/11/25 15:54	Finish

Then you can follow the task creation wizard to do the necessary modification.

Start Task:

If the task has status Enabled, it can be selected and click on Start button to execute right away.


Local		iSCSI					
Add		Edit	Start	Import		Clear Import Task	
Status	Task...	Source Folders	Target	Type	Task Type	Last Run Time	Curre...
Enable	iscsi...	iSCSI_kendo03	local_iscsi_backup01	Sch...	Backup Task	--	Manual Stop

Import:


It can be imported from backup of iSCSI and become to physical iSCSI volume. Click on "Import" tab on right hand portion of task bar and screen appear as below. Follow the steps to complete the setting.

Local		iSCSI					
Add		Import		Clear Import Task			
Status	Task...	Source Folders	Target	Type	Task Type	Last Run Time	Curre...
Enable	impo...	data/USBCopy/iSCSI_300211	RAID	--	Import Task	2015/12/11 19:09	Finish
Enable	dual...	iSCSI_300jbodbtrfs, data/iSCSI_300211	iscsilbackup	Sch...	Backup Task	2015/12/11 20:07	Finish


1. Choose RAID volume where iSCSI is going to import.

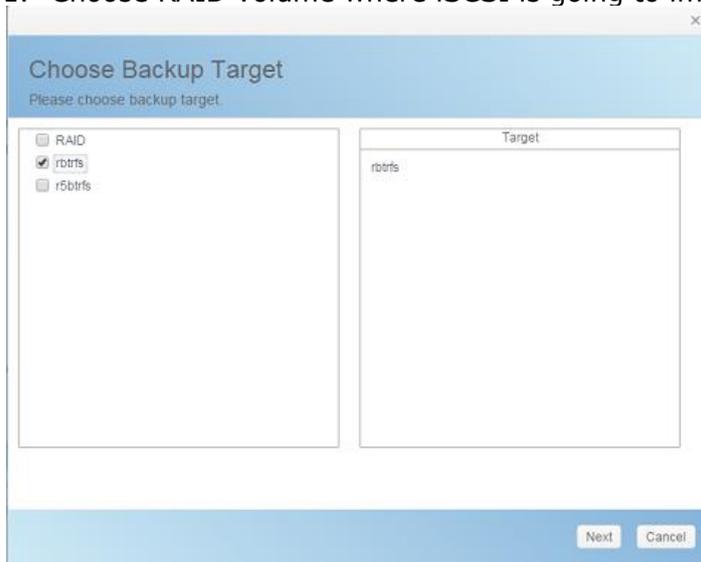

2. Choose the iSCSI backup folder and locate the file where the iSCSI volume has backed up previously. System will denote the triangle symbol for the valid file which can be imported.

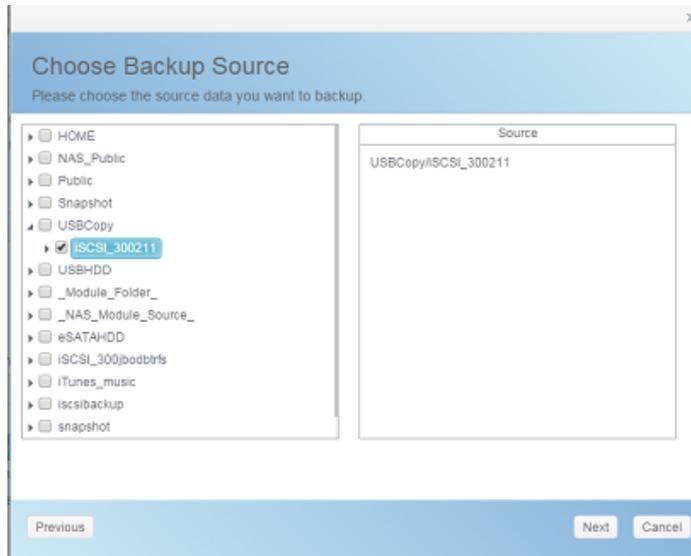

3. Input task name for this iSCSI import job and select where the task log will be recorded.

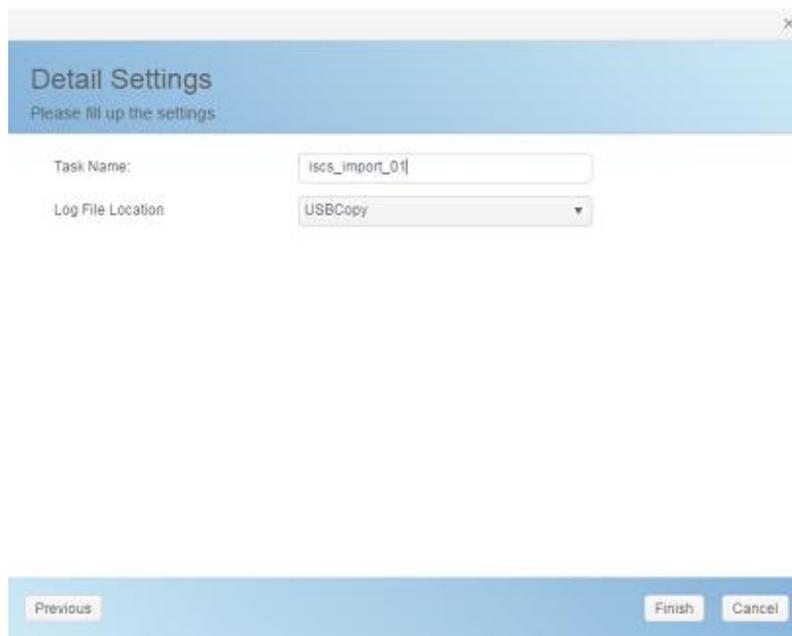

4. Clicking on "Finish" to complete the iSCSI import task and confirm OK to start the iSCSI import job.



5. Now the local backup task list has the iSCSI import job listed and under process.

Enable	iscs...	data/USBCopy/iSCSI_300211	rbtrfs	--	Import Task	--	Process
--------	---------	---------------------------	--------	----	-------------	----	---------

6. The status will change to "Finish" once the task has completed. iSCSI volume 30021 can be found on iSCSI list under RAID volume btrfs.

Enable	iscs...	data/USBCopy/iSCSI_300211	rbtrfs	--	Import Task	2015/12/14 12:53	Finish
--------	---------	---------------------------	--------	----	-------------	---------------------	--------

iSCSI List						iSCSI Setting		NAS Stacking	
Add									
Status	Name	Create o...	Auth	LUNs	IQN				
Enable	300211	rbtrfs	No Authority	1	iqn.2015-12.com.thecus.n5810pro:iscsi.300211.raid1				

NOTE

- To import iSCSI volume from backup folder → file, system will check whether the physical iSCSI volume existed or not. If the iSCSI volume is existed, then warning message "The target name already exists."

Clear Import Task:

Click on "Clear Import Task" tab on right hand portion of task bar, following with confirmation "OK" to remove all import tasks.


Add						Import	Clear Import Task
Status	Task...	Source Folders	Target	Type	Task Type	Last Run Time	Curre...
Enable	iscsi...	data/USBCopy/iSCSI_300211	rbtrfs	--	Import Task	2015/12/14 13:20	Finish

Remove Imported Tasks ×

Are You Sure You Want to Remove Imported Tasks?

Remote Backup

When it comes to backing up your data, it's very important to have flexibility. Remote Backup provides you with many options, including custom/full backup for shares and iSCSI volume backup.

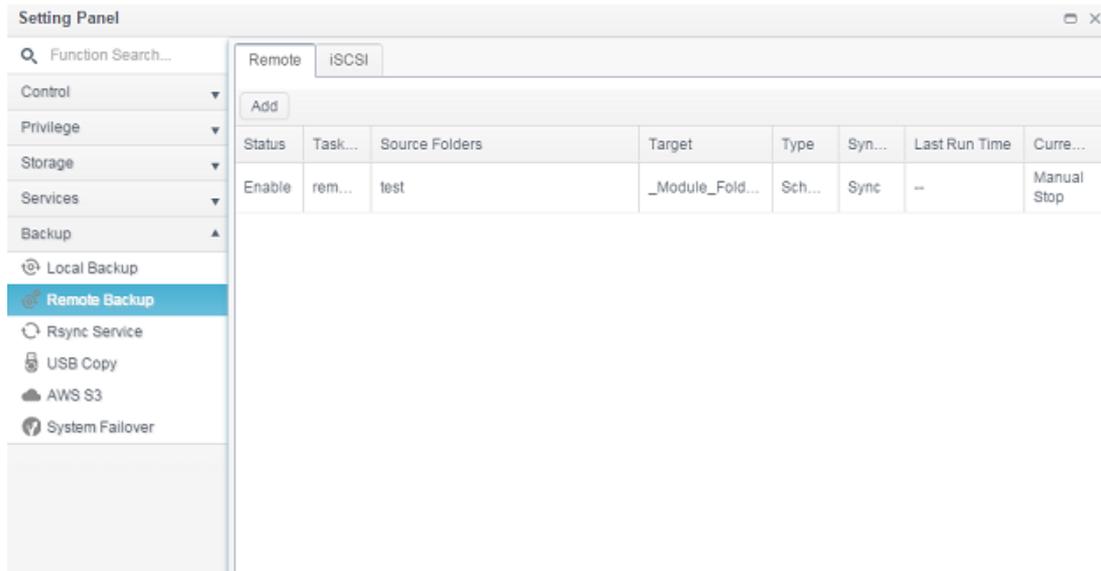


Remote File/Folder Backup


Add Task:

From "Remote" tab click on "Add" button and the setting screen will appear as below. Follow the steps to complete the setting.


1. Fill in the remote target IP (Destination) and port (need to be changed only if this port is already in use). If encryption is required then enable it. Please make sure the associated target server also has encryption enabled. And click on "Get Server Folder" to get remote target server folder list to choose destination.

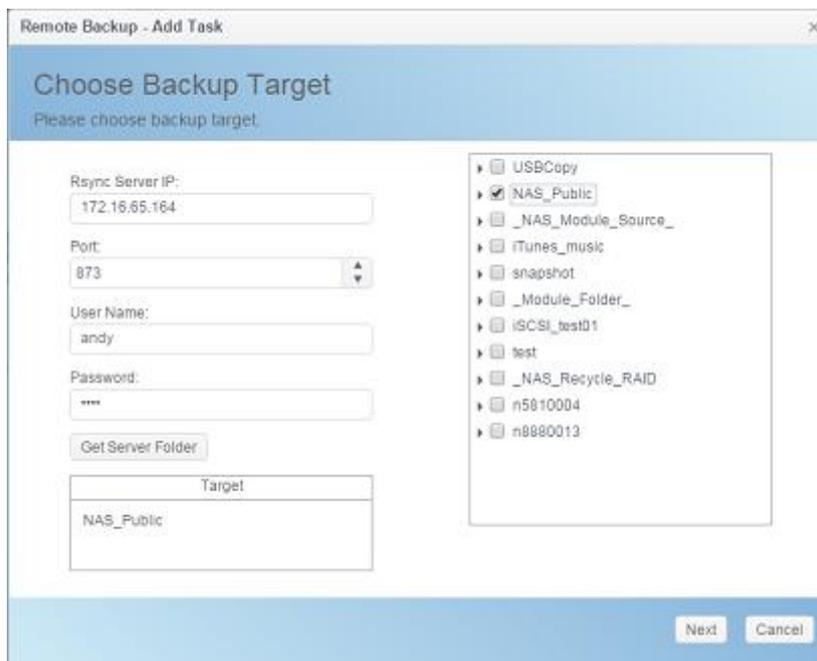

2. Choose source folder to backup. The multiple folders selection is allowed.

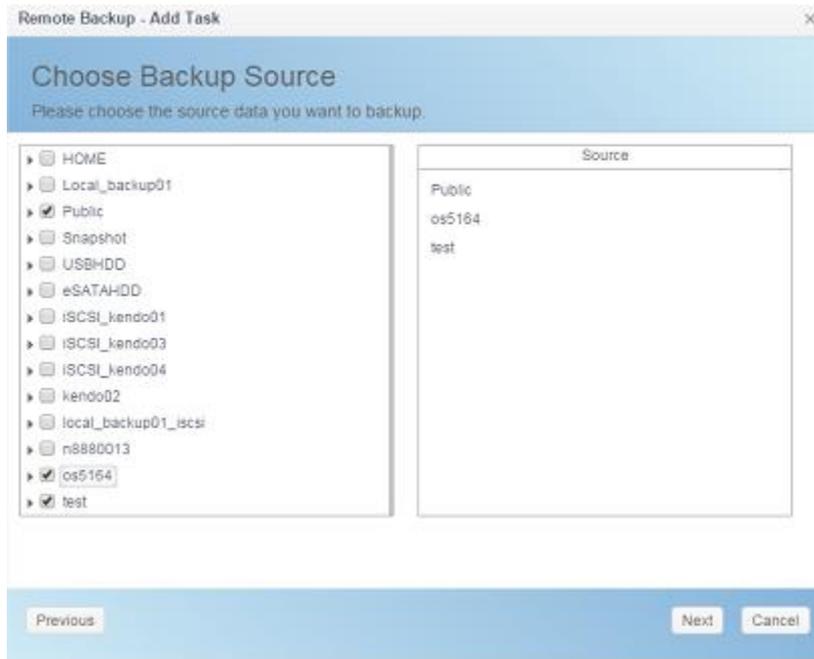


3. Input task name and related options.

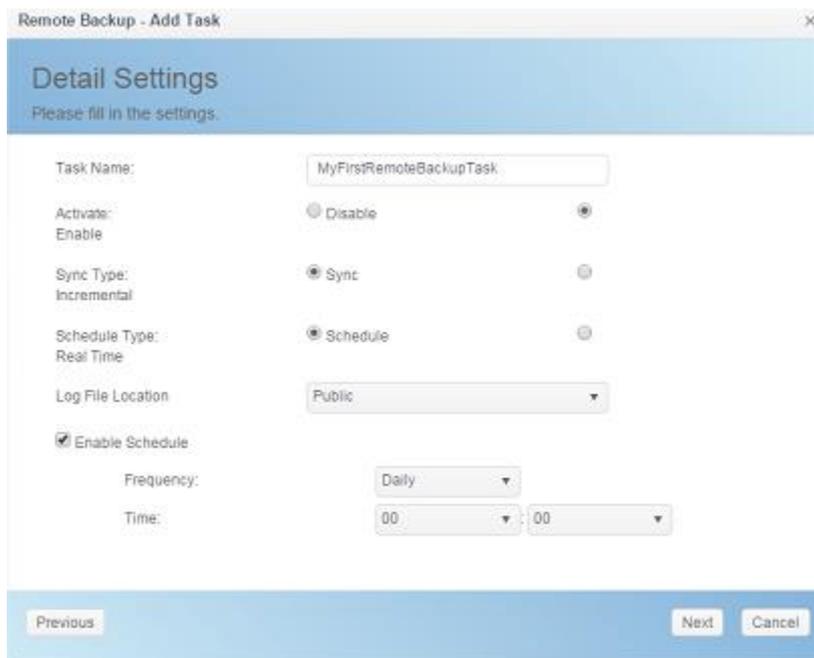

Add Rsync Backup Task	
Item	Description
Task Name	This is how this task will appear in the task list.
Activate	Enable to activate task or disable to execute later.
Sync Type	<p>Sync mode: Makes your source match your target completely; deleting and adding files on your target as they are deleted and added on your source.</p> <p>Incremental Mode : Makes your source match your target and keep all old files; adding files on your target as they are added on</p>

	your source, but NOT deleting files on your target as they are deleted on your source.
Schedule Type	Real time: It will backup folders/files from source to target on the fly. On the other hand, any changes from the source will back up to the target right away. Schedule: The task will start only according to the schedule.
Log Location	Choose the folder to save the log details while the task is executed.
Enable Schedule	If backup is set as "Schedule", please input the related period and time.

4. More advanced settings.

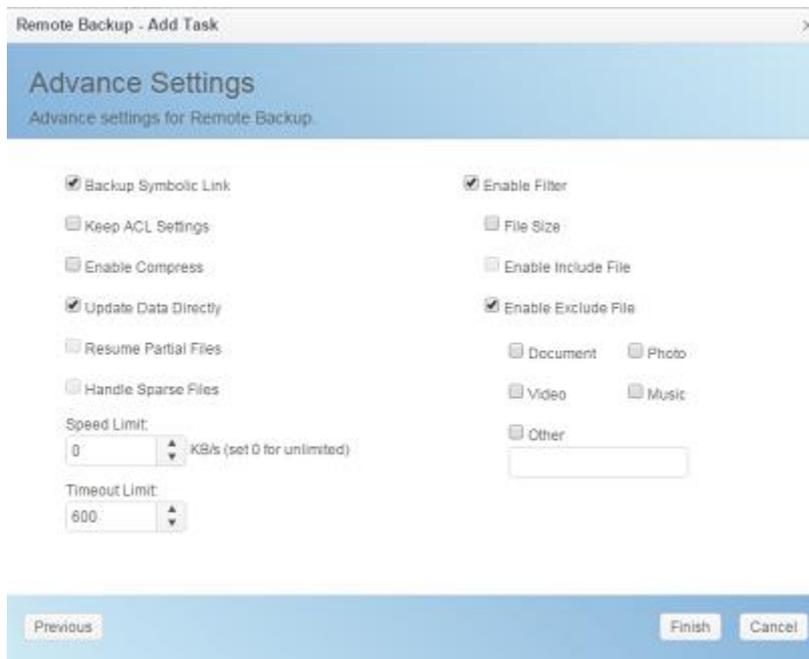


Add Rsync Backup Task	
Item	Description
Backup Symbolic Link	
Keep ACL Setting	It will backup not just data itself but also ACL configuration with associated folders/files.
Enable Compress	With this option, compress the file data as it is sent to the destination machine, which reduces the amount of data being transmitted – something that is useful over a slow connection.
Update Data Directly	It could by pass temp file creation wile copy file from source to destination. It will more efficiency but risky if any interrupt during operation.
Resume Partial File	Enable this could keep the partial file which should make a subsequent transfer of the rest of the file much faster
Handle Sparse File	Try to handle sparse file efficiently so they take up less

	space on the destination.
Speed Limit	Input the bandwidth control for data backup operation.
Timeout Limit	Setup the timeout when trying to build up a connection in between the source and the target system.
Enable Filter	<p>The filter can be set to be executed only in certain circumstances. If none of them has been selected, it will do the backup from the source to the destination in full.</p> <p>File size: From xx ~ xxx If xx=1 and xxx blank then only file size > xx will execute real time backup. If xx=1 and xxx=2 then only size in between xx and xxx will execute real time backup. If xx blank and xxx=2 then only file size < xxx will execute real time backup.</p> <p>Include File Type: Only the associated file format will do the real time backup.</p> <p>Exclude File Type: The excluded file format won't be included in the real time backup.</p> <p>For document file format: doc, xls, pdf, docx, xlsx, txt, ppt, pptx, html, htm</p> <p>For picture file format: jpg, bmp, tif, png, pbm, tga, xar, xbm</p> <p>For video file format: avi, mpg, mp4, mkv, fli, flv, rm, ram</p> <p>For music file format: mp3, wav, wma, acc, dss, msv, dvf, m4p, 3gp, amr, awb</p> <p>User defined can be input in other box.</p>

5. Click Finish to complete task added

Edit Task:

To edit created task, select desired item and click on Edit.

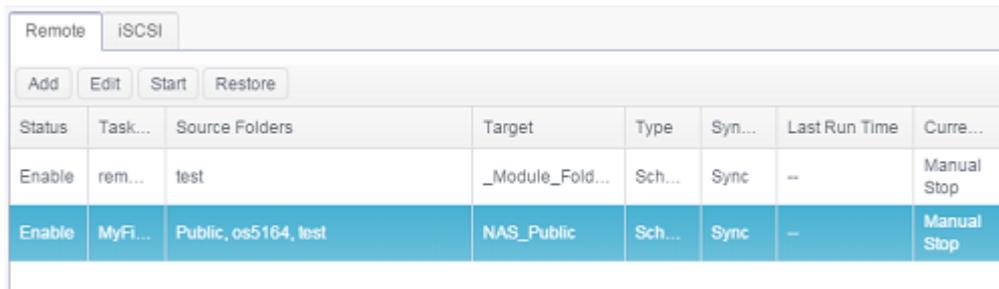

The screenshot shows a web interface for managing Remote iSCSI tasks. At the top, there are tabs for 'Remote' and 'iSCSI'. Below the tabs are buttons for 'Add', 'Edit', 'Start', and 'Restore'. A table lists the tasks with columns for Status, Task name, Source Folders, Target, Type, Sync, Last Run Time, and Current Action.

Status	Task...	Source Folders	Target	Type	Syn...	Last Run Time	Curre...
Enable	rem...	test	_Module_Fold...	Sch...	Sync	--	Manual Stop
Enable	MyFi...	Public, os5164, test	NAS_Public	Sch...	Sync	--	Manual Stop

Then you can follow the task creation wizard to do the necessary modification.

Start Task:

If the task has status Enable, it can be selected and click on **Start** button to execute right away.



This screenshot is identical to the one above, showing the Remote iSCSI task management interface with a table of tasks.

Status	Task...	Source Folders	Target	Type	Syn...	Last Run Time	Curre...
Enable	rem...	test	_Module_Fold...	Sch...	Sync	--	Manual Stop
Enable	MyFi...	Public, os5164, test	NAS_Public	Sch...	Sync	--	Manual Stop

Restore Task:




The screenshot shows the Remote iSCSI task management interface. The 'Start' button is highlighted. The table below shows the tasks, with the first task highlighted in blue, indicating it is selected.

Status	Task...	Source Folders	Target	Type	Syn...	Last Run Time	Curre...
Enable	rem...	Public	NAS_Public	Sch...	Sync	2015/11/23 19:32	Finish
Enable	MyFi...	Public, os5164, test	NAS_Public	Sch...	Sync	--	Manual Stop


Remote iSCSI Backup

Add Task:


From "iSCSI" tab click on **Add** button and the setting screen will appear as below. Follow the steps to complete the setting.

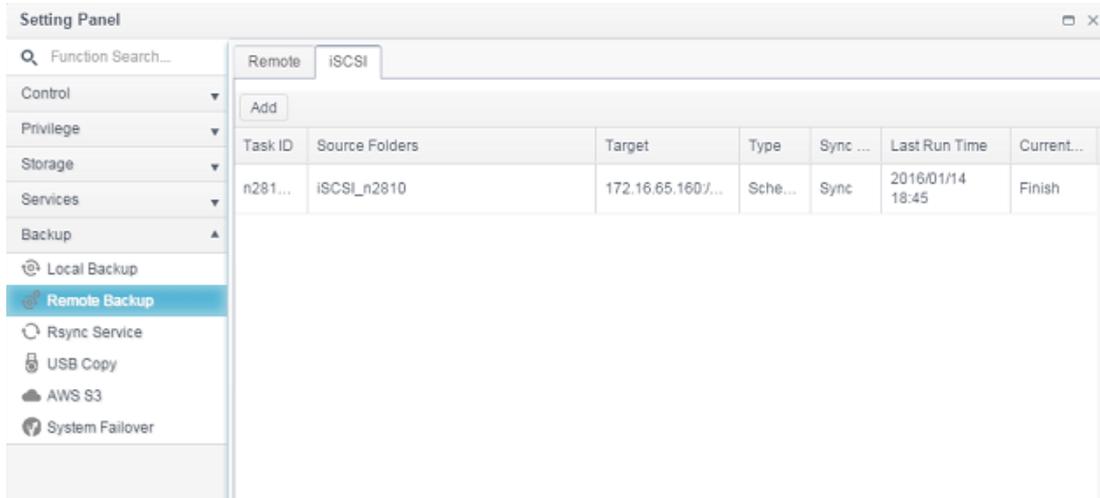


1. Fill in the remote target IP (Destination) and port (need to be changed only if this port is already in use). If encryption is required then enable it. Please make sure the associated target server also has encryption enabled. And click on "Get Server Folder" to get remote target server folder list to choose destination.

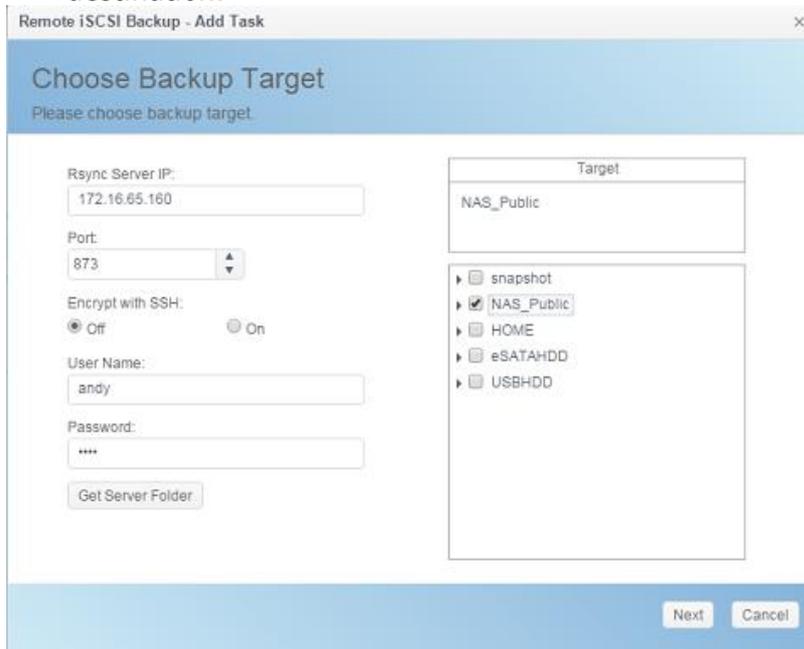

2. System will list available iSCSI volume, choose source iSCSI volume to backup. The multiple iSCSI volume selection is allowed.

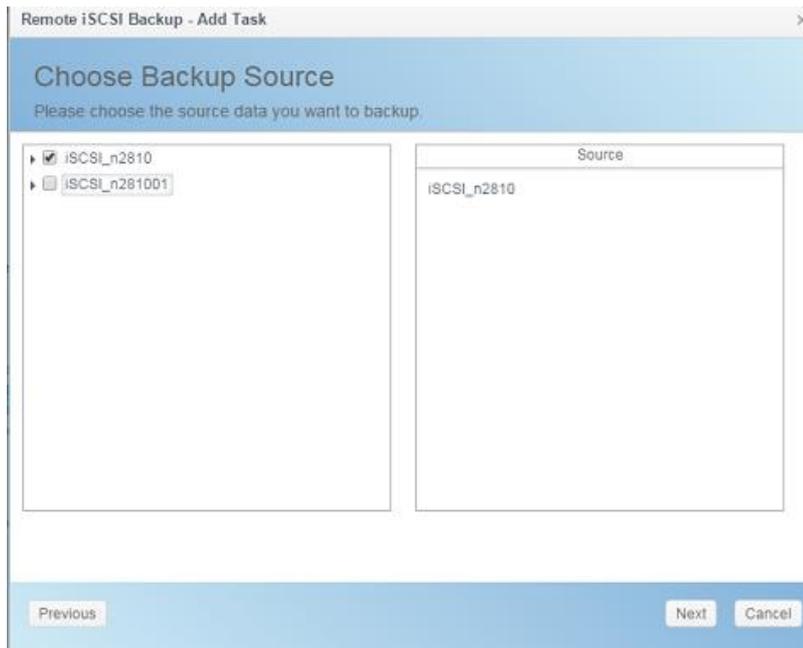

3. Input task name and related options.

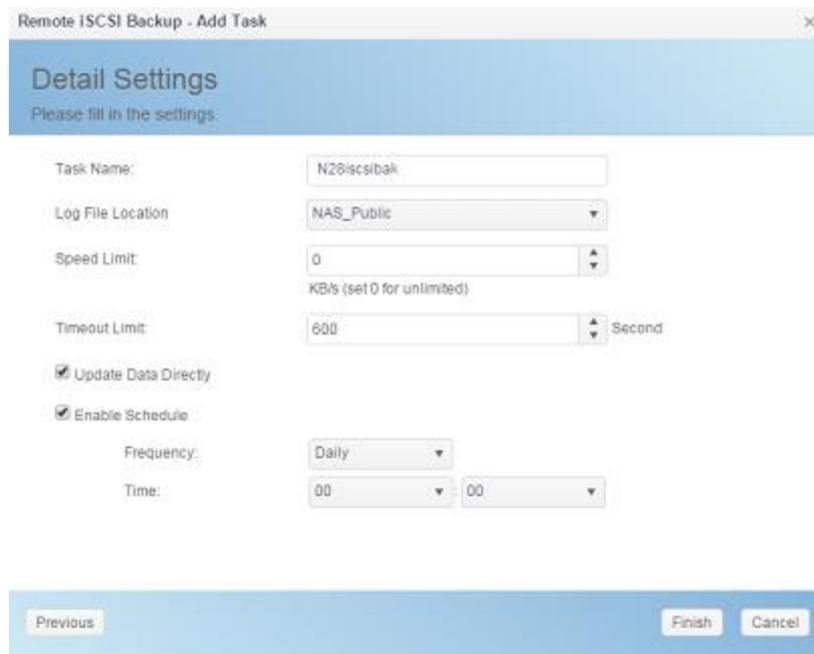

Add Rsync Backup Task	
Item	Description
Task Name	This is how this task will appear in the task list.
Log Location	Choose the folder to save the log details while the task is executed.
Speed Limit	Input the bandwidth control for data backup operation.
Timeout Limit	Setup the timeout when trying to build up a connection in between the source and the target system.
Update Data Directly	It could by pass temp file creation wile copy file from source to destination. It will more efficiency but risky if

	any interrupt during operation.
Enable Schedule	If backup is set as "Schedule", please input the related period and time.

4. Click Finish to complete task added.

Edit Task:

To edit created task, select desired item and click on Edit.

Task ID	Source Folders	Target	Type	Sync ...	Last Run Time	Current...
n281...	iSCSI_n2810	172.16.65.160/...	Sche...	Sync	2016/01/14 18:45	Finish
N28is...	iSCSI_n2810	172.16.65.160/...	Sche...	Sync	--	Manual Stop

Then you can follow the task creation wizard to do the necessary modification.

Start Task:

The task can be started right away by selecting the associated task and clicking on **Start** button to execute.

Task ID	Source Folders	Target	Type	Sync ...	Last Run Time	Current...
n281...	iSCSI_n2810	172.16.65.160/...	Sche...	Sync	2016/01/14 18:45	Finish
N28is...	iSCSI_n2810	172.16.65.160/...	Sche...	Sync	--	Manual Stop


Restore Task:

iSCSI volumeserver

Task ID	Source Folders	Target	Type	Sync ...	Last Run Time	Current...
n281...	iSCSI_n2810	172.16.65.160/...	Sche...	Sync	2016/01/14 18:45	Finish
N28is...	iSCSI_n2810	172.16.65.160/...	Sche...	Sync	--	Manual Stop

Rsync Service

Rsync Service is used for rsync remote backup a target role. So while setup rsync remote backup the associated rsync service from target side is required. To enable Thecus NAS as rsync target role, click on Rsync Service under Backup category and the setting screen will appear as below.

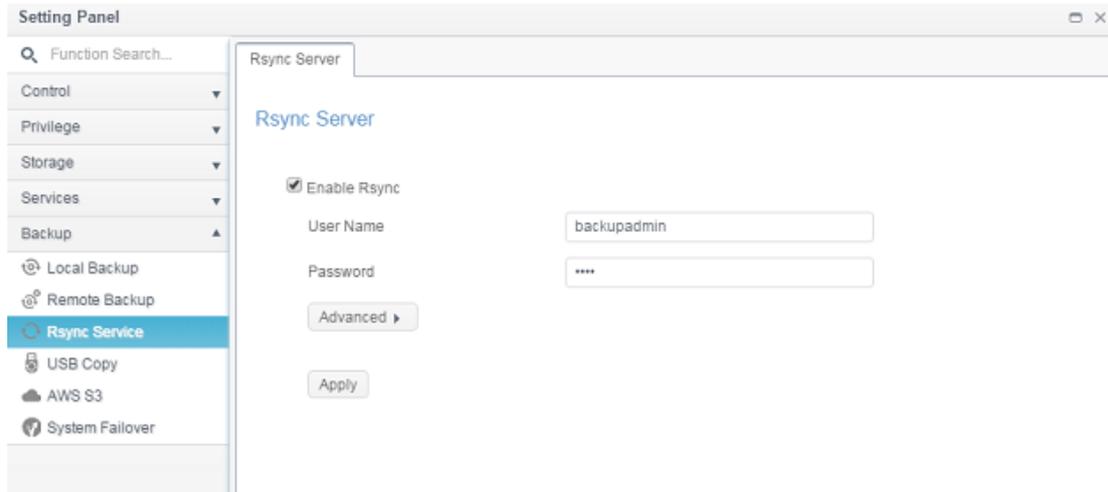


1. Enable **Rsync Service**
2. Add a **username** and **password** (they can be different than your NAS's username and password)
3. Select **Apply**

NOTE

- You will need this user name and password while the data is going to remotely backup to this Rsync target server.


Now Rsync is turned on your NAS, which means it can be used as a target for Rsync backup, in other words, only the backup NAS needs to be activated in this way.

Click on **Advanced** to change network port or enable encryption transfer. If encryption transfer has been enabled, it needs to input both public and private keys. Or click on **Download keys** button to use system default.

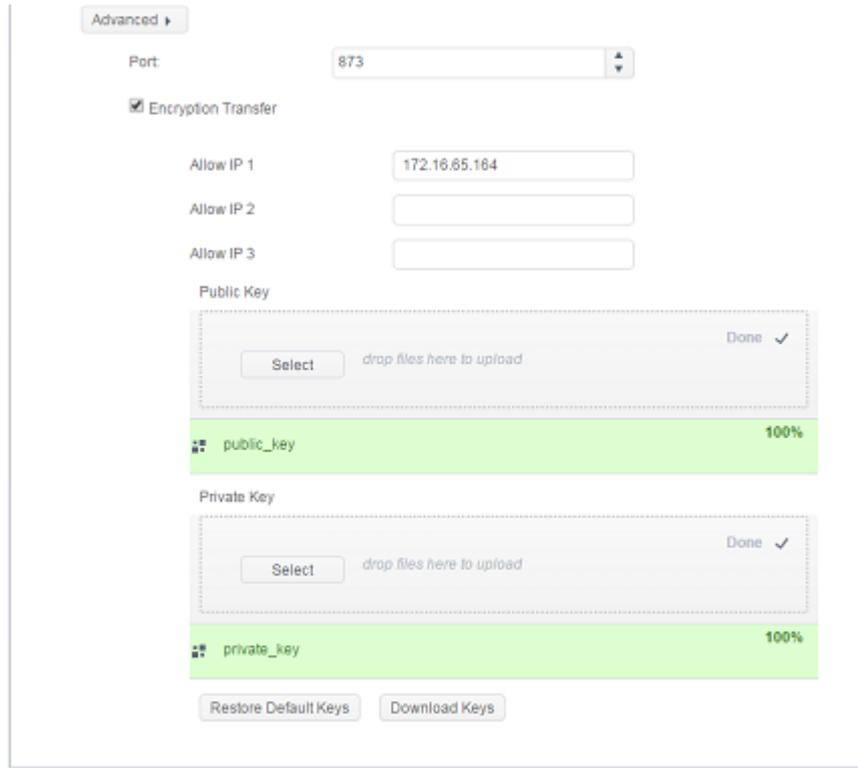

USB Copy

The USB Copy function using the USB copy button or front panel LCM/OLED of system used to only offer one-way transfers (i.e. only from the USB drive to the designated NAS folder). Now numerous options are available, such as: Disabled, bi-directional, and scheduled.

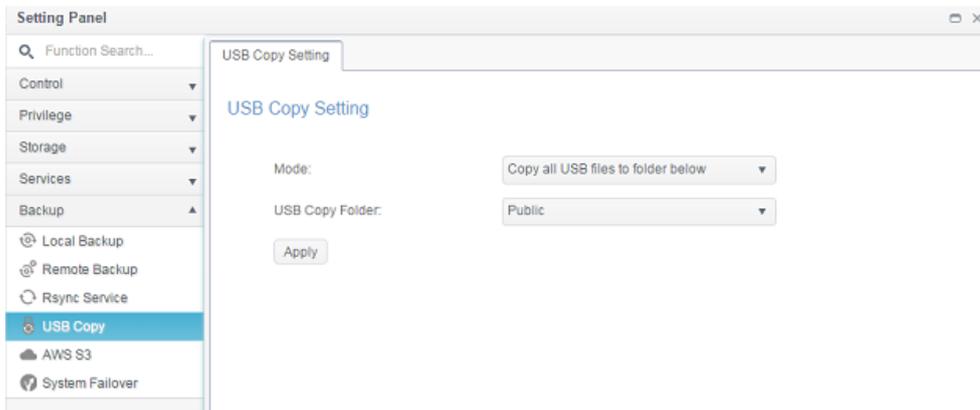


Disable USB Copy:

Simply select **Disable** from USB Copy Mode and the USB Copy button or LCM/OLED USB Copy item will become inactive.




Copy all USB files to folder below:

If you select "Copy all USB files to folder below", then please choose the target path from the drop-down list. All files and folders on the USB device will be copied over to the NAS.

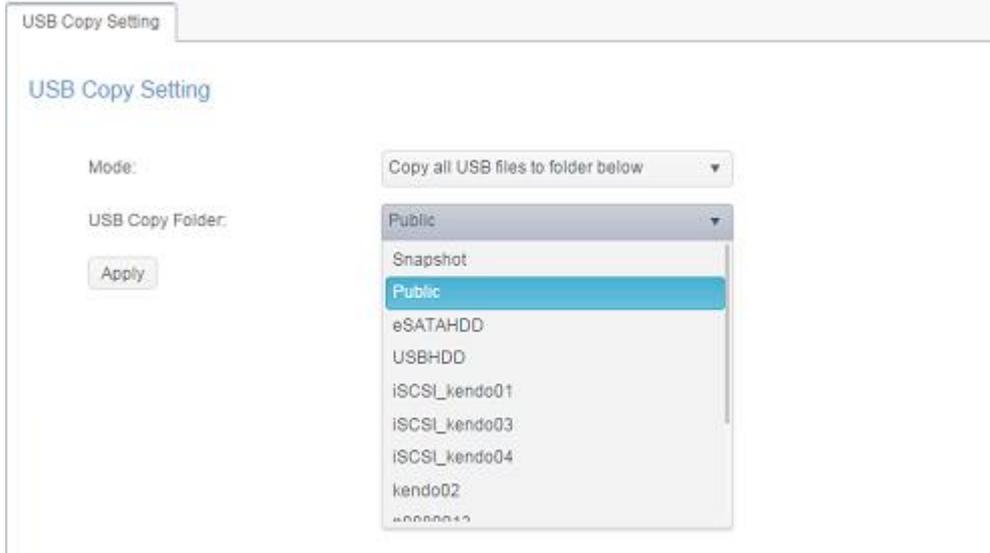


User defined:

By applying the USB Copy service in user defined mode, the additional USB Copy tab will appear, click on USB Copy to add new task.

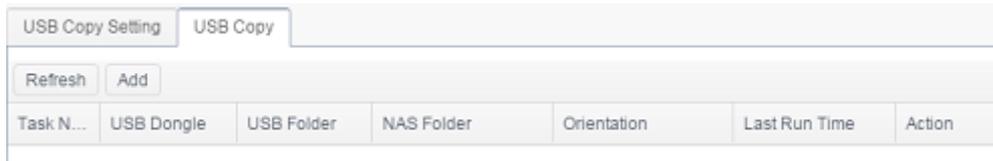

There are 2 options available: "USB to NAS" and "NAS to USB", following the steps below to complete the setting.


1. Choose direction and input task name then click **next**.

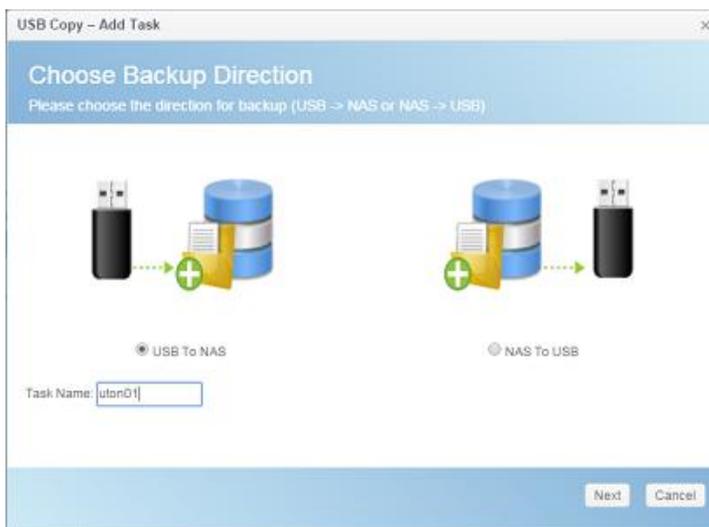

2. Choose USB device which has been installed on the system then select folder(s) to copy.



3. Choose the destination on NAS folder.

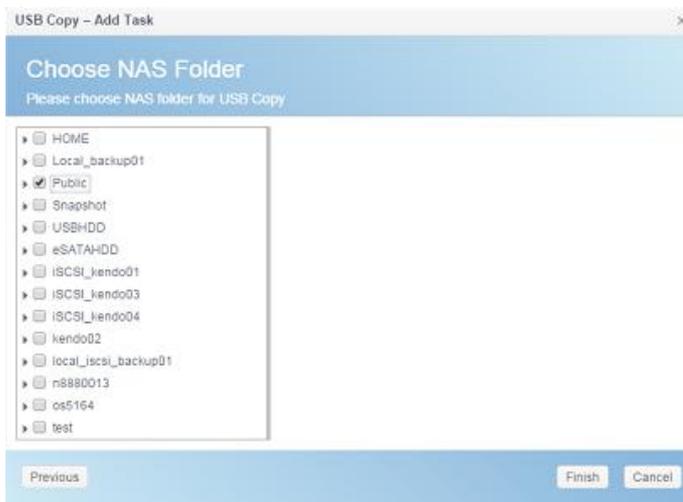

4. Click on **Finish** to complete add USB copy task. The USB Copy page will have a new task listed.

USB Copy Setting		USB Copy				
Task N...	USB Dongle	USB Folder	NAS Folder	Orientation	Last Run Time	Action
uton01	USB-Flash-Disk	1	Public	USB To NAS	--	

5. Now you can operate by using USB copy button or LCM to execute USB copy task. Once the task has been completed, the Last Run Time and Action will update.

USB Copy Setting		USB Copy				
Task N...	USB Dongle	USB Folder	NAS Folder	Orientation	Last Run Time	Action
uton01	USB-Flash-Disk	1	Public	USB To NAS	2015/11/30 17:30	Finished

AWS S3

Please refer to the link

http://www.thecus.com/sp_download_page.php?TYPE_ID=1&PROD_ID=113

System Failover

Please refer to the link

http://www.thecus.com/sp_download_page.php?TYPE_ID=1&PROD_ID=113

Chapter 5: General User Login


Overview

The Thecus IP storage provides an easily accessible connection for **General User** via web interface. With it, you can manage your own files and photos on Thecus IP storage anywhere on the network.


General User Login Interface

Make sure your network is connected to the Internet and the system administrator has local user account created. To login Thecus IP storage as **General User**:

1. Type the Thecus IP storage IP address into your browser. (Default IP address is <http://192.168.1.100>)

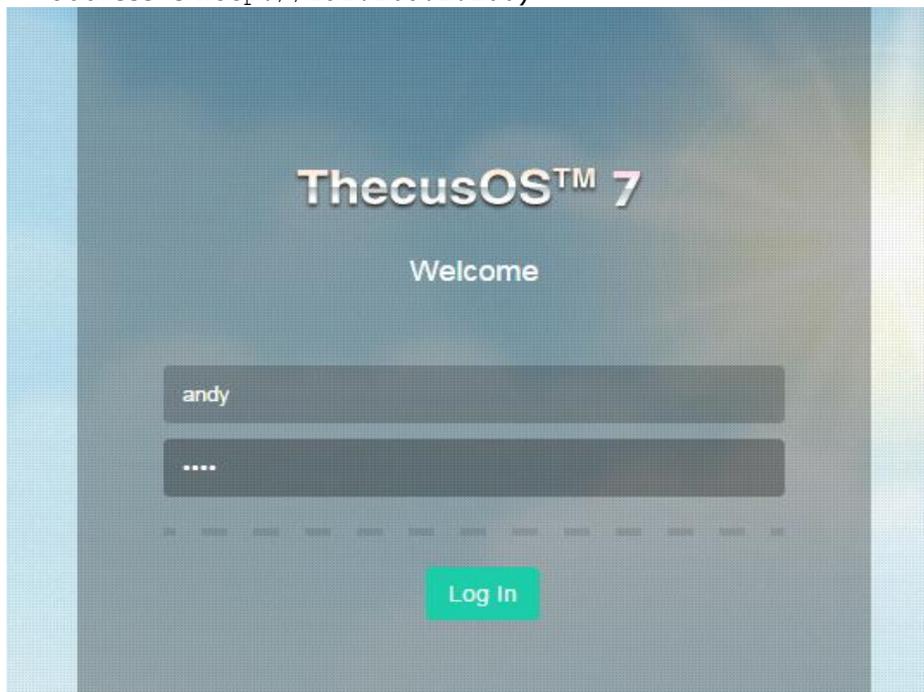

2. Login to the system using the valid system user name and password which is created by administrator. The example for user andy and password 0000:

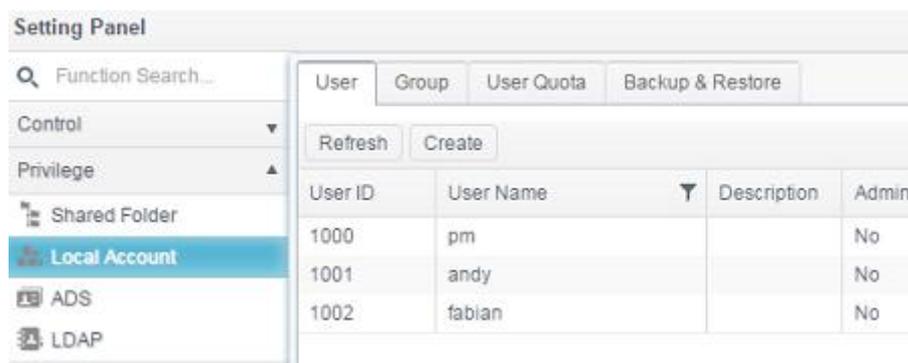

User Name: andy
Password: 0000

You will see the **General User Interface** as below. From here, you can manage your own files/photos, change password, select display language and monitor virtually every aspect of the Thecus IP storage from anywhere on the network.

Menu Tree

The **Menu Tree** is where you will find the entry for each topic which General User can operate in the Thecus IP storage.




Menu Bar	
Item	Description
App Center	The entry of App Center
File Center	The entry of File Center
Photo Center	The entry of Photo Center

Moving your cursor over any of these items and click, it will display associated screen for each topic.

Quick System Resource Monitor

On the top right hand corner of menu bar, click on  and it will display the system resource monitor info such as CPU, memory and storage usage. .

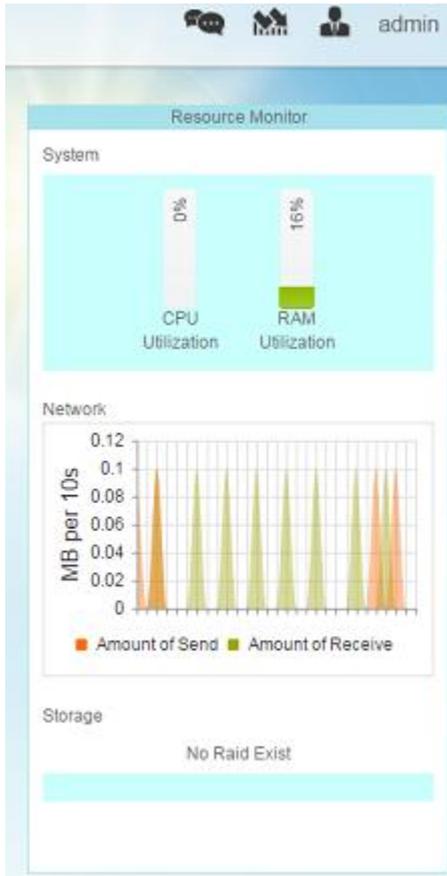

Language Selection

The Thcus IP storage supports multiple Languages, including:

- English
- Japanese
- Traditional Chinese
- Simplified Chinese
- French
- German
- Italian
- Korean
- Spanish
- Russian
- Polish
- Portuguese


On the top right hand corner of menu bar, select desired language from drop down list. This user interface will switch to the selected language for Thcus IP storage.

Logout

Click on logout to quit **General User Web Interface**.

Change Password

On the top right hand corner of menu bar, select **Password** item and the **Change Password** screen appears. Enter a new password in the **New Password** box and confirm your new password in the **Verify** box. Press **Change** to confirm password changes.

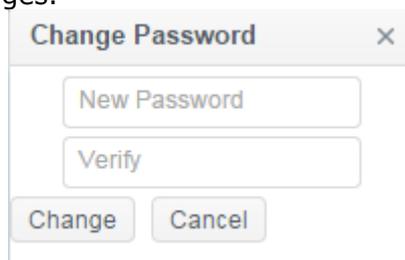


A dialog box titled "Change Password" with a close button (X) in the top right corner. It contains two input fields: "New Password" and "Verify". Below the input fields are two buttons: "Change" and "Cancel".




App Center

The **App Center** is where to store additional application which has provided by either 3rd party users or Thcus. Click on App Center icon and a screen will appear as below. It will list "installed Apps" which has installed by administrator.



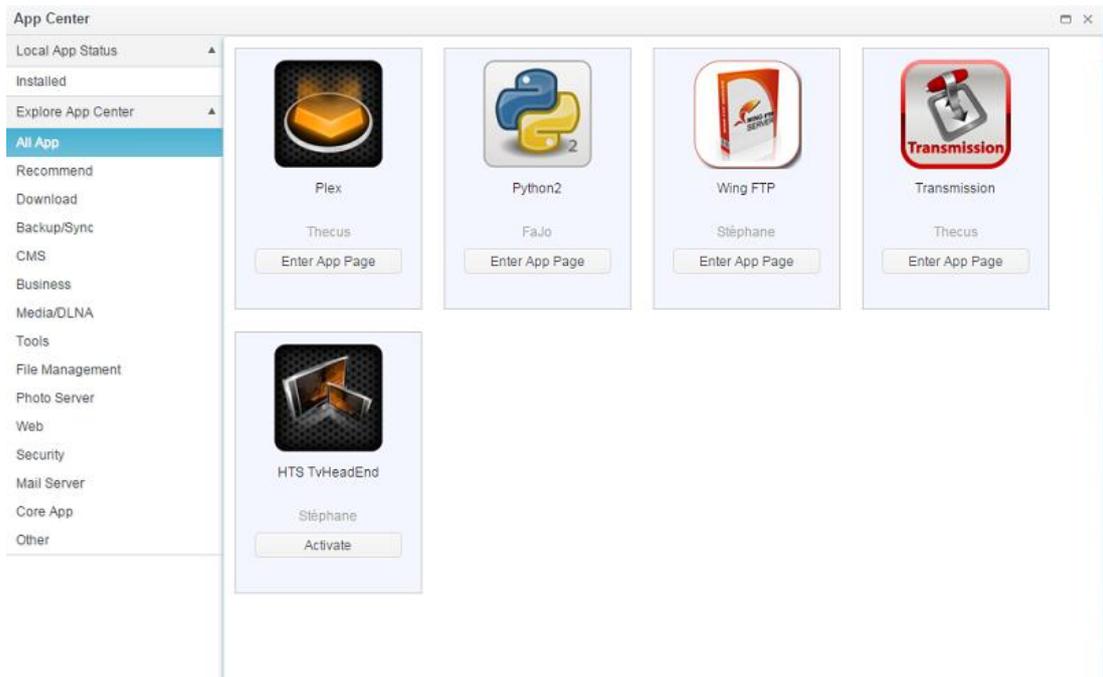

To view the details of associated App, click on icon of App to open the window. To execute associated App, click on 'Enter App Page'.

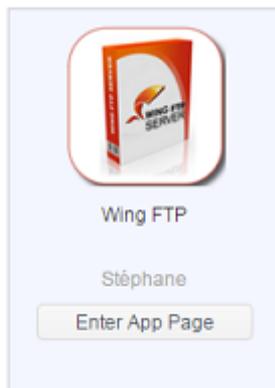



Wing FTP

Enter App Page

Latest Version
4.3.8.1
現在版本
4.3.8.1
Module Size
12.4MB
Release Date
2014-07-18
Developer
Stéphane
Release Note
4.3.8.1

Description:

Wing FTP Server is a highly functional, easy-to-use and secure FTP Server solution that can be used in Windows, Linux, Mac OSX and Solaris. It supports a number of file transfer protocols, including FTP, HTTP, FTPS, HTTPS and SFTP, giving your end-users flexibility in how they connect to the server. And it provides admins with a web based interface to administer the server from anywhere. You can also monitor server performance and online sessions and even receive email notifications about various events taking place on the server.

Features

Major Features:

Cross Platform
You can run the server on Windows, Linux, Mac OSX and Solaris.

Multiple Protocols
Supports FTP, FTPS(FTP with SSL), HTTP, HTTPS, and SFTP(FTP with SSH).

FIPS 140-2
Uses OpenSSL FIPS 140-2 validated cryptographic module (certificate #1051).

Remote Web Based Administration
Administrate your file server anytime, anywhere.

Web Based Client
Access your files anytime, anywhere.

Multiple Domains
You can run multiple virtual servers on the same IP address.


Task Scheduler
Uses the Lua scripting tasks to appoint an action at a specified time.

File Center

The **File Center** allowed General NAS user to manage public, permitted and own files through web interface. Click on File Center icon and the system will display public system folder, associated ACL allowed folders and login user's **Home** folder.

The left pane has listed all available folders list for associated login user. The right pane will list details files/folders to against selected folder.

To manage files/folders using the function tabs or click on right button of mouse to bring out context menu.

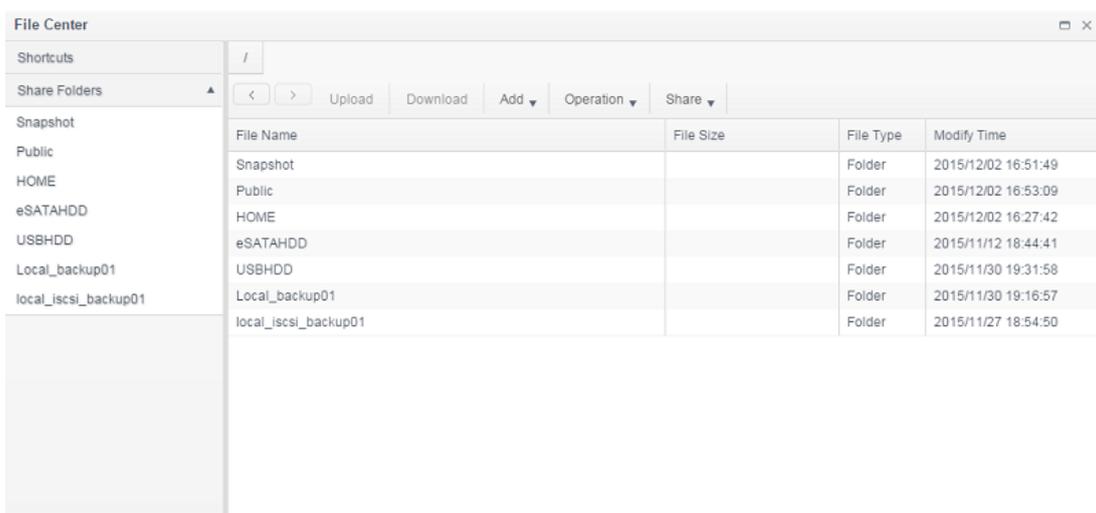


File Name	File Size	File Type	Modify Time
Snapshot		Folder	2015/12/02 16:51:49
Public		Folder	2015/12/02 16:53:09
HOME		Folder	2015/12/02 16:27:42
eSATAHDD		Folder	2015/11/12 18:44:41
USBHDD		Folder	2015/11/30 19:31:58
Local_backup01		Folder	2015/11/30 19:16:57
local_iscsi_backup01		Folder	2015/11/27 18:54:50

A description for functions on File Center as following:


UPnP Port Management	
Item	Description
Upload	Upload the file(s) to associated NAS folder
Download	Download file(s) from NAS associated NAS folder to local system
Add	Allowed you to create folder
Operation	
Cut	Cut selected folder/file
Copy	Copy selected folder(s)/file(s), hold on shift key and next file/folder to have multiple selection
Paste	Paste Cut/Copy file(s)/folder(s)
Delete	Delete selected folder/file
Rename	Rename selected folder/file
Add to shortcut	Add selected file/folder to short list
Detail	Display selected file/folder details
Share	
Share file	Can generate share link/QR Code and shared on the network
Manage share link	To manage share link list

For above function list, sharing file is very useful tool that could have particular file shared instantly via URL or QR Code. And it could also protect by password if there is security concern.


To share the file, simply select desired file from file list then click on "Share" to have drop down menu appear. Click on "Share File" and setting screen will appear as below. Input the password to have shared file protected if needed. The shared file can also setup duration for haring period. Carry on to click on "Generate Share Link", system will generate URL and QR Code automatically. You could provide either one to whom have this file shared.

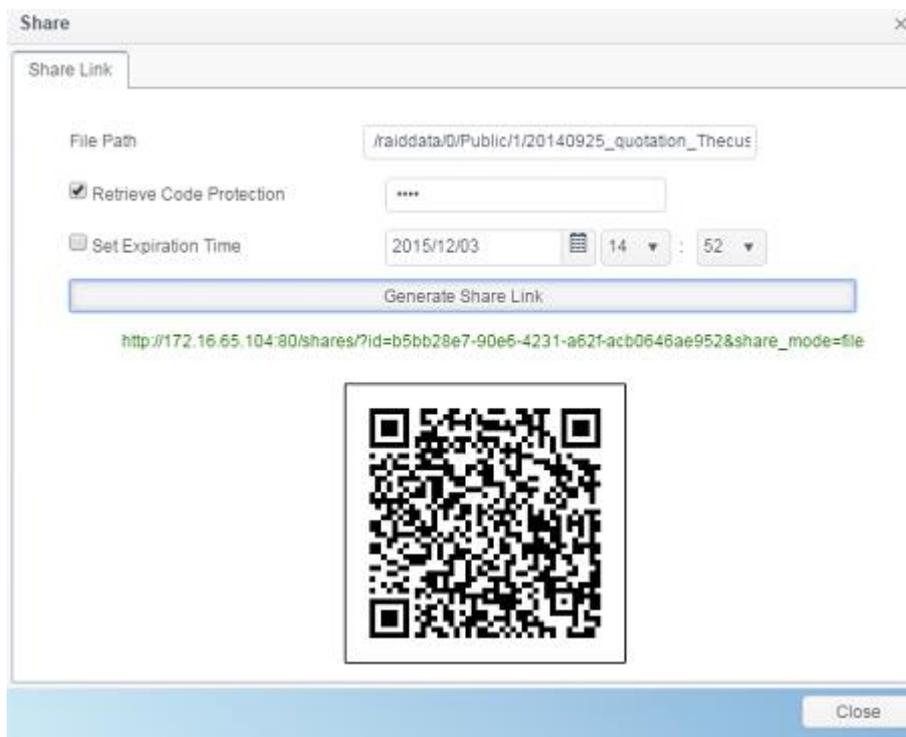

For all of share link been generated, it can be managed from "Manage Share Link". Click on "Share" to bring out drop down menu list then select "Manage Share Link". The all existed share link will be listed.

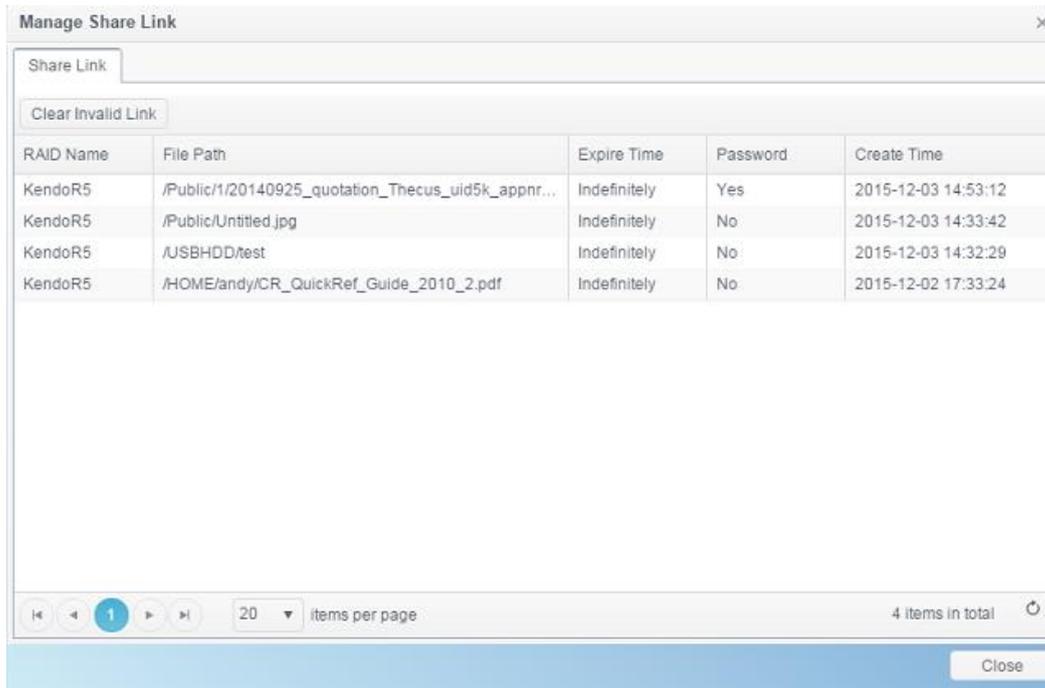


Click on "Clear Invalid Link", system will check listed share link for file path correctness. If found the file is no longer existed, the share link will be deleted. To manage single share link, click on desired one from share link list. The additional function tab will appear to allow you "Edit" or "Delete" associated share link.

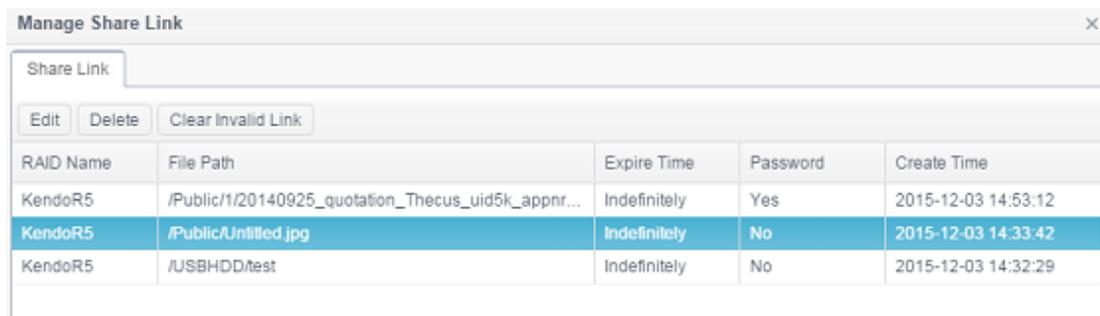


To remove associated share link, simply click on "Delete". To add/remove password or make expire time, click on "Edit" to make the modification.

Photo Center

The **Photo Center** allowed General NAS user to manger album and photos through web interface. Click on **Photo Center** icon and system will display album list and operation tabs to manage album and photos. .

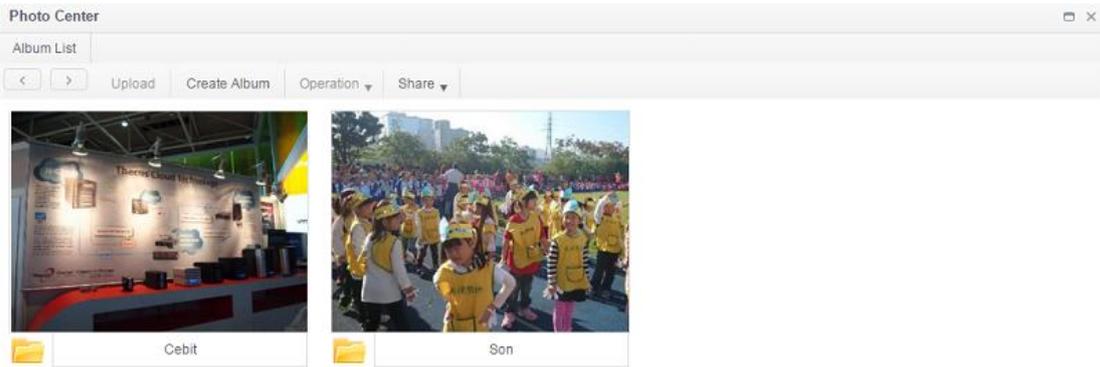

Click on created album to have all photos listed.

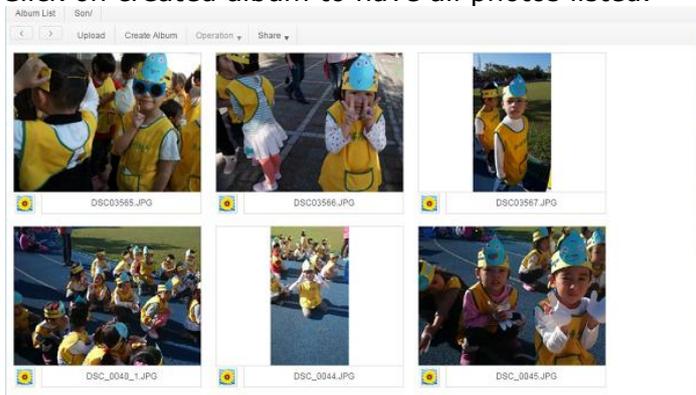

A description for functions on Photo Center as following:

UPnP Port Management	
Item	Description
Upload	Upload the file(s) to associated NAS folder
Create Album	
Add	Allowed you to create folder
Operation	
Delete	Delete selected photo
Rename	Rename selected photo
Detail	Display selected photo details
Set as Cover	Set selected photo as album cover
Share	
Share album	Can generate share link/QR Code and shared associated album on the network
Share photo	Can generate share link/QR Code and shared associated photo on the network
Manage share link	To manage share link list


Just like sharing tool from File Center, Photo Center is also capable of this. The album and photo can be shared on the network with or without password protection and also setup sharing time.

Exactly same way as File Center to manage share link, system could validate all of created share link and allowed to add/remove password protection or sharing duration.

Chapter 6: Tips and Tricks


Access your NAS from Windows

The quick way to access your Thecus IP storage from Windows is if the NAS IP is at 172.16.67.1, to access the NAS share folder, input `\\172.16.67.1` from file explore.

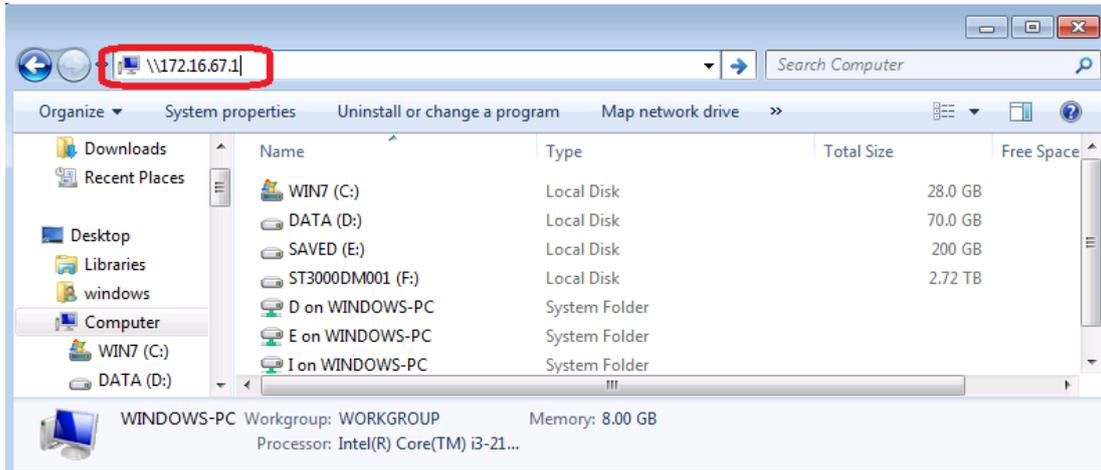


Share folder accessibility with associated login user account

If it is an open permission share folder (PUBLIC =YES), just click the right mouse key to map network driver.

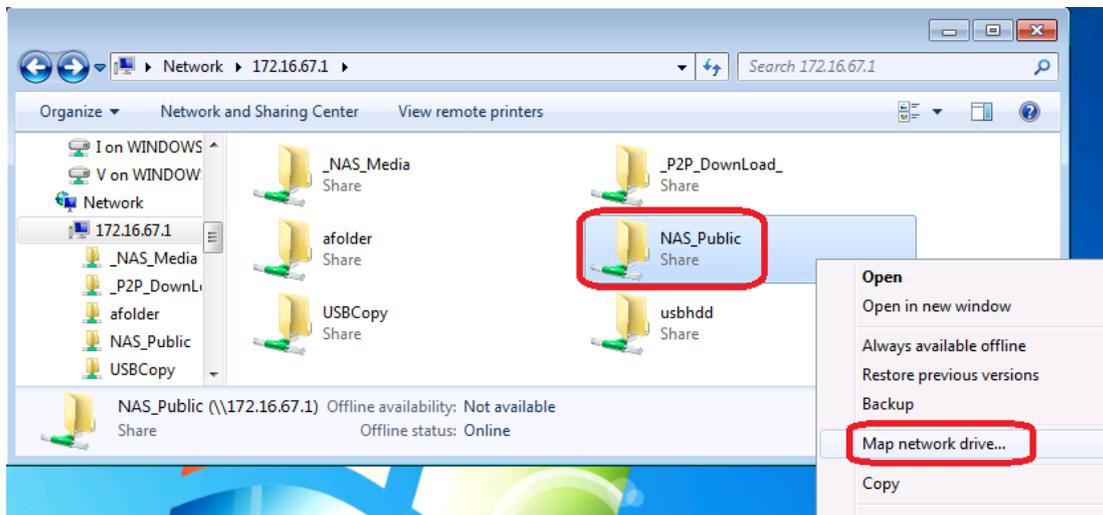

If it is nonpublic ACL share folder (PUBLIC =NO), you will need to key-in the user account & password which has been created on Thecus IP storage user database and permission granted.

Warning: Windows will auto save the connection account & password automatically. If you want to test multiple accounts & ACL, please doing test from FTP.

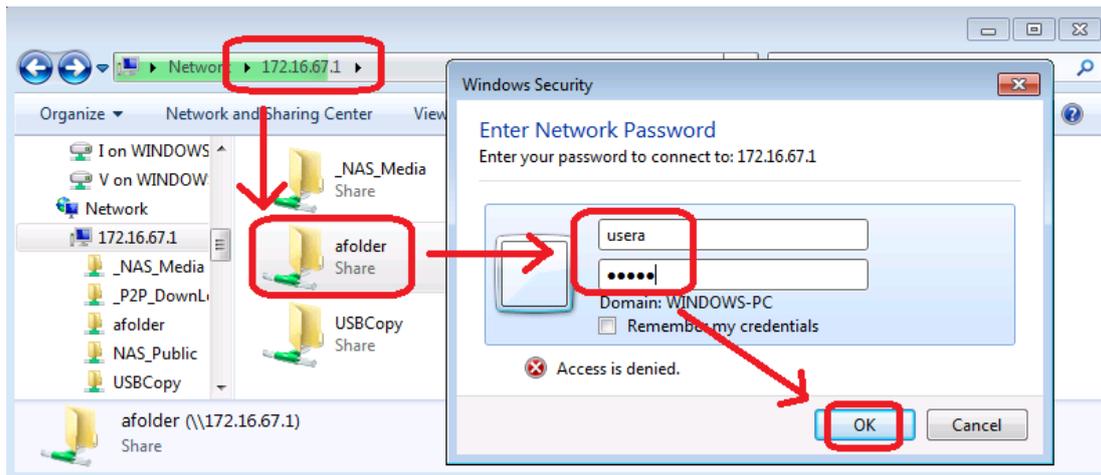

For more information and resources, see [How to remove Windows saved network password](#).

USB Storage Expansion

The Thcus IP storage supports external USB hard disks through its USB ports. Once a USB hard disk is successfully mounted, the entire volume will be linked automatically to the default USB HDD folder. The Thcus IP storage supports USB external storage devices. All file names on the USB disk volume are case sensitive.

Before attaching a USB disk drive to Thcus IP storage, you have to partition and format it on a desktop computer or a notebook first. The attached device will be located at `\\192.168.1.100\usbhdd\sd(x)1` where `192.168.1.100` means the IP address of Thcus IP storage and `sd(x)1` stands for the first partition on the USB disk drive.

Remote Administration

You can set up your Thcus IP storage for remote administration. With remote administration, you can access your Thcus IP storage over the Internet, even if your Thcus IP storage is behind a router. This is especially useful if you are traveling and suddenly need a file from your Thcus IP storage.

Setting up remote administration is a three-part process, and will require the following equipment:

- Thcus IP storage device
- Cable / DSL Router with Dynamic DNS support
- Home PC
- Internet Connection

NOTE

Router setup will differ slightly depending on router used. For this example, we will use the Asus WL500g because it has support for Dynamic DNS. Contact your router hardware vendor for setup help.

Part I - Setup a DynDNS Account

1. Go to <http://www.dyndns.org> from your home PC.
2. Click on the **Sign Up Now** link.
3. Check the Check boxes, select a user name (i.e.: N5810), enter your email address (i.e.: xxx@example.com), check **Enable Wildcard**, and create a password (i.e.: xxxx).
4. Wait for an email from www.dyndns.org.
5. Open the email and click on the link to activate your account

Part II - Enable DDNS on the Router

1. Go to the router setup screen and select **IP Config > Miscellaneous DDNS Setting** from your Home PC.
2. Click on **Yes** for **Enable the DDNS Client?**
3. Select **www.dyndns.org**.
4. Go to router setup screen, and enter the following information:
 - a. User Name or E-mail Address: **xxx@example.com**
 - b. Password or DDNS Key: **xxxx**
 - c. Host Name: **www.N5810.dyndns.org**
 - d. Enable wildcard? Select **Yes**
 - e. Update Manually: Click **Update**

Part III - Setting up Virtual Servers (HTTPS)

1. Navigate to **NAT Setting > Virtual Server**.
2. For **Enable Virtual Server?**, select **Yes**
3. Setup the HTTPS Server
 - a. **Well-Known Applications:** Select **User Defined**
 - b. **Local IP:** Enter **192.168.1.100**
 - c. **Port Range:** **443** (the default HTTPS port setting on the Thecus IP storage)
 - d. **Protocol:** select **TCP**
 - e. Click **Add**.
 - f. Click **Apply**.
4. Test the HTTPS connection from another computer on the Internet
 - a. From a remote computer, open your browser and enter **https://www.N5810.dyndns.org**
 - b. You should see the login page of Thecus IP storage.

Firewall Software Configuration

If you are using a software firewall (i.e. Norton Internet Security) and are having trouble connecting to Thecus IP storage, you can try the following steps:

1. Double click the **NIS** icon on system tray, and then configure the **Personal Firewall**.
2. On the **Programs** page, find the **SetupWizard.exe** and change its permission to "Permit All". If it's not in the program list, use the **Add** or **Program Scan** buttons to find it.
3. On the **Networking** page, manually add Thecus IP storage IP address (i.e. 192.168.1.100) to the **Trusted** list.

Replacing Damaged Hard Drives

If you are using RAID 1 you can easily replace a damaged hard drive in the Thecus IP storage while keeping your data secure with the system's automatic data recovery.

Hard Drive Damage

When a hard drive is damaged and data in the RAID volume is corrupted, the system will beep to notify the status.

Replacing a Hard Drive

To replace a hard disk drive in the Thecus IP storage:

1. Remove the tray with the damaged hard disk.
2. Unscrew the damaged hard disk and remove it from the tray.
3. Slide a new hard disk into the tray and fasten the screws.
4. Insert the hard disk tray back into the Thecus IP storage until it snaps into place. You can also lock it with a key if desired.
5. The LED will blink green when the HDD is accessed.

RAID Auto-Rebuild

When using RAID 1 on the Thecus IP storage, you can use the auto-rebuild function when an error is detected.

1. When a hard disk fails the system beeps and/or an email notification is sent to the specified receivers.
2. Follow the steps mentioned above to replace the failed hard disk.
3. The system automatically recognizes the new hard disk and starts the auto-rebuild sequence to resume its status before the hard disk crash.

Chapter 7: Troubleshooting

Forgot My Network IP Address

If you forget your network IP address and have no physical access to the system, you can find out the IP address by using the setup wizard to retrieve the IP of your Thcus IP storage.

1. Start the Setup Wizard, and it will automatically detect all Thcus IP storage products on your network.
2. You should be able to find the IP address of the Thcus IP storage which you have forgotten in the **Device Discovery** screen.

Can't Map a Network Drive in Windows XP

You may have problems mapping a network drive under the following conditions:

1. The network folder is currently mapped using a different user name and password. To connect using a different user name and password, first disconnect any existing mappings to this network share.
2. The mapped network drive could not be created because the following error has occurred: **Multiple connections to a server or shared resource by the same user, using more than one user name, are not allowed.** Disconnect all previous connections to the server or shared resource and try again.

To check out existing network connections, type `net use` under the DOS prompt. You may refer the URL below for more network mapping information.

http://thcus.kayako.com/default_import/Knowledgebase/Article/View/541/0/three-ways-to-remove-windows7-saved-network-password

http://thcus.kayako.com/default_import/Knowledgebase/Article/View/113/0/what-is-unc-path

Restoring Factory Defaults

From the **Firmware Setting** menu, choose the **Reset to Default** item and the **Reset to Factory Default** screen appears. Press **Apply** to reset Thcus IP storage factory default settings.

WARNING

Resetting to factory defaults will not erase the data stored in the hard disks, but WILL revert all the settings to the factory default values.

Problems with Time and Date Settings

The administrator is able to select an NTP Server to keep Thecus IP storage time synchronized. However, if Thecus IP storage cannot access the Internet, you may encounter a problem when setting the Time and Time Zone. If this happens:

1. Login to the Web Administration Interface.
2. Navigate to **Regional Option>NTP Service**.
3. Under **NTP Service**, untick to disable.
4. Set the **Date**, **Time**, and **Time Zone** manually from **Date/Time**.
5. Click **Apply**.

In addition, if the Thecus IP storage is able to access the Internet and you want to keep the NTP Server clock.isc.org by default, please make sure the DNS Server is correctly entered, thereby allowing the NTP Server name to correctly resolve. (See **Network > Host Setting > DNS Setting**)

Appendix A: Customer Support

If your Thecus IP storage is not working properly, we encourage you to check out **Chapter 7: Troubleshooting**, located in this manual. You can also try to ensure that you are using the latest firmware version for your Thecus IP storage. Thecus is committed to providing free firmware upgrades to our customers. Our newest firmware is available on our Download Center:

http://www.thecus.com/sp_download.php

If you are still experiencing problems with your Thecus IP storage, or require a Return Merchandise Authorization (RMA), feel free to contact technical support via our Technical Support Website:

http://www.thecus.com/sp_tech.php

For Sales Information you can e-mail us at:

sales@thecus.com

Thank you for choosing Thecus!

Appendix B: RAID Basics

Overview

A Redundant Array of Independent Disks (RAID) is an array of several hard disks that provide data security and high performance. A RAID system accesses several hard disks simultaneously, which improves I/O performance over a single hard disk. Data security is enhanced by a RAID, since data loss due to a hard disk failure is minimized by regenerating redundant data from the other RAID hard disks.

Benefits

RAID improves I/O performance, and increases data security through fault tolerance and redundant data storage.

Improved Performance

RAID provides access to several hard disk drives simultaneously, which greatly increases I/O performance.

Data Security

Hard disk drive failure unfortunately is a common occurrence. A RAID helps prevent against the loss of data due to hard disk failure. A RAID offers additional hard disk drives that can avert data loss from a hard disk drive failure. If a hard drive fails, the RAID volume can regenerate data from the data and parity stored on its other hard disk drives.

RAID Levels

The Thecus IP storage supports standard RAID levels 0, 1, 5, 6, 10, 50, 60 and JBOD. You choose a RAID level when you create a system volume. The factors for selecting a RAID level are:

- Your requirements for performance
- Your need for data security
- Number of hard disk drives in the system, capacity of hard disk drives in the system

The following is a description of each RAID level:

RAID 0

RAID 0 is best suited for applications that need high bandwidth but do not require a high level of data security. The RAID 0 level provides the best performance of all the RAID levels, but it does not provide data redundancy.

RAID 0 uses disk striping and breaking up data into blocks to write across all hard drives in the volume. The system can then use multiple hard drives for faster read and write. The stripe size parameter that was set when the RAID was created determines the size of each block. No parity calculations complicate the write operation.

RAID 1

RAID 1 mirrors all data from one hard disk drive to a second one hard disk drive, thus providing complete data redundancy. However, the cost of data storage capacity is doubled.

This is excellent for complete data security.

RAID 5

RAID 5 offers data security and it is best suited for networks that perform many small I/O transactions at the same time, as well as applications that require data security such as office automation and online customer service. Use it also for applications with high read requests but low write requests.

RAID 5 includes disk striping at the byte level and parity information is written to several hard disk drives. If a hard disk fails the system uses parity stored on each of the other hard disks to recreate all missing information.

RAID 6

RAID 6 is essentially an extension of RAID level 5 which allows for additional fault tolerance by using a second independent distributed parity scheme (dual parity) Data is striped on a block level across a set of drives, just like in RAID 5, and a second set of parity is calculated and written across all the drives; RAID 6 provides for an extremely high data fault tolerance and can sustain two simultaneous drive failures.

This is a perfect solution for mission critical applications.

RAID 10

RAID 10 is implemented as a striped array whose segments are RAID 1 arrays. RAID 10 has the same fault tolerance as RAID level 1.

RAID 10 has the same overhead for fault-tolerance as mirroring alone. High I/O rates are achieved by striping RAID 1 segments.

Under certain circumstances, RAID 10 array can sustain up to 2 simultaneous drive failures

Excellent solution for applications that would have otherwise gone with RAID 1 but need an additional performance boost.

RAID 50

A RAID 50 combines the straight block-level striping of RAID 0 with the distributed parity of RAID 5. This is a RAID 0 array striped across RAID 5 elements. It requires at least 6 drives.

RAID 60

A RAID 60 combines the straight block-level striping of RAID 0 with the distributed double parity of RAID 6. That is, a RAID 0 array striped across RAID 6 elements. It requires at least 8 disks.

JBOD

Although a concatenation of disks (also called JBOD, or "Just a Bunch of Disks") is not one of the numbered RAID levels, it is a popular method for combining multiple physical disk drives into a single virtual one. As the name implies, disks are merely concatenated together, end to beginning, so they appear to be a single large disk.

As the data on JBOD is not protected, one drive failure could result total data loss.

Stripe Size

The length of the data segments being written across multiple hard disks. Data is written in stripes across the multiple hard disks of a RAID. Since multiple disks are accessed at the same time, disk striping enhances performance. The stripes can vary in size.

Disk Usage

When all disks are of the same size, and used in RAID, Thecus IP storage disk usage percentage is listed below:

RAID Level	Percentage Used
RAID 0	100%
RAID 1	$1/n \times 100\%$
RAID 5	$(n-1)/n \times 100\%$
RAID 6	$(n-2)/n \times 100\%$
RAID 10	50%
RAID 50	$(n-1)/n \times 100\%$
RAID 60	$(n-2)/n \times 100\%$
JBOD	100%

n : HDD number

Appendix C: Active Directory Basics

Overview

With Windows 2000, Microsoft introduced Active Directory (ADS), which is a large database/information store. Prior to Active Directory the Windows OS could not store additional information in its domain database. Active Directory also solved the problem of locating resources; which previously relied on Network Neighborhood, and was slow. Managing users and groups were among other issues Active Directory solved.

What is Active Directory?

Active Directory was built as a scalable, extensible directory service that was designed to meet corporate needs. A repository for storing user information, accounts, passwords, printers, computers, network information and other data, Microsoft calls Active Directory a "namespace" where names can be resolved.

ADS Benefits

ADS lets Thecus IP storage integrate itself with the existing ADS in an office environment. This means the Thecus IP storage is able to recognize your office users and passwords on the ADS server. Other major benefits ADS support provides include:

1. Easy integration of Thecus IP storage into the existing office IT infrastructure

The Thecus IP storage acts as a member of the ADS. This feature significantly lowers the overhead of the system administrator. For example, corporate security policies and user privileges on an ADS server can be enforced automatically on Thecus IP storage.

2. Centralized user/password database

The Thecus IP storage does not maintain its own copy of the user/password database. This avoids data inconsistency between Thecus IP storage and other servers. For example, without ADS support, an administrator might need to remove a specific user privilege on Thecus IP storage and each individual server. With ADS support, the change on an ADS server is known to all of its ADS members.

Appendix D: Licensing Information

Overview

This product included copyrighted third-party software licensed under the terms of GNU General Public License. Please see THE GNU General Public License for extra terms and conditions of this license.

Source Code Availability

Thecus Technology Corp. has exposed the full source code of the GPL licensed software. For more information on how you can obtain our source code, please visit our web site, <http://www.thecus.com>.

Copyrights

- This product includes cryptographic software written by Eric Young (eay@cryptsoft.com).
- This product includes software developed by Mark Murray.
- This product includes software developed by Eric Young (eay@cryptsoft.com).
- This product includes software developed by the OpenSSL Project for use in the OpenSSL Toolkit (<http://www.openssl.org/>).
- This product includes PHP, freely available from (<http://www.php.net/>).
- This product includes software developed by the University of California, Berkeley and its contributors.
- This product includes software developed by Winning Strategies, Inc.
- This product includes software developed by the Apache Group for use in the Apache HTTP server project (<http://www.apache.org/>).
- This product includes software developed by Softweyr LLC, the University of California, Berkeley, and its contributors.
- This product includes software developed by Bodo Moeller.
- This product includes software developed by Greg Roelofs and contributors for the book, "PNG: The Definitive Guide," published by O'Reilly and Associates.
- This product includes software developed by the NetBSD Foundation, Inc. and its contributors.
- This product includes software developed by Yen Yen Lim and North Dakota State University.
- This product includes software developed by the Computer Systems Engineering Group at Lawrence Berkeley Laboratory.
- This product includes software developed by the Kungliga Tekniska Högskolan and its contributors.
- This product includes software developed by the Nick Simicich.
- This product includes software written by Tim Hudson (tjh@cryptsoft.com).
- This product includes software developed by Christopher G. Demetriou for the NetBSD Project.

CGIC License Terms

Basic License

CGIC, copyright 1996, 1997, 1998, 1999, 2000, 2001, 2002, 2003, 2004 by Thomas Boutell and Boutell.Com, Inc.

Permission is granted to use CGIC in any application, commercial or noncommercial, at no cost. HOWEVER, this copyright paragraph must appear on a "credits" page accessible in the public online and offline documentation of the program. Modified versions of the CGIC library should not be distributed without the attachment of a clear statement regarding the author of the modifications, and this notice may in no case be removed. Modifications may also be submitted to the author for inclusion in the main CGIC distribution.

GNU General Public License

Version 2, June 1991

Copyright © 1989, 1991 Free Software Foundation, Inc.
51 Franklin St, Fifth Floor, Boston, MA 02110-1301 USA

Everyone is permitted to copy and distribute verbatim copies of this license document, but changing it is not allowed.

PREAMBLE

The licenses for most software are designed to take away your freedom to share and change it. By contrast, the GNU General Public License is intended to guarantee your freedom to share and change free software--to make sure the software is free for all its users. This General Public License applies to most of the Free Software Foundation's software and to any other program whose authors commit to using it. (Some other Free Software Foundation software is covered by the GNU Library General Public License instead.) You can apply it to your programs, too.

When we speak of free software, we are referring to freedom, not price. Our General Public Licenses are designed to make sure that you have the freedom to distribute copies of free software (and charge for this service if you wish), that you receive source code or can get it if you want it, that you can change the software or use pieces of it in new free programs; and that you know you can do these things.

To protect your rights, we need to make restrictions that forbid anyone to deny you these rights or to ask you to surrender the rights. These restrictions translate to certain responsibilities for you if you distribute copies of the software, or if you modify it.

For example, if you distribute copies of such a program, whether gratis or for a fee, you must give the recipients all the rights that you have. You must make sure that they, too, receive or can get the source code. And you must show them these terms so they know their rights.

We protect your rights with two steps: (1) copyright the software, and (2) offer you this license which gives you legal permission to copy, distribute and/or modify the software.

Also, for each author's protection and ours, we want to make certain that everyone understands that there is no warranty for this free software. If the software is modified by someone else and passed on, we want its recipients to know that what they have is not the original, so that any problems introduced by others will not reflect on the original authors' reputations.

Finally, any free program is threatened constantly by software patents. We wish to avoid the danger that redistributors of a free program will individually obtain patent licenses, in effect making the program proprietary. To prevent this, we have made it clear that any patent must be licensed for everyone's free use or not licensed at all.

The precise terms and conditions for copying, distribution and modification follow.

TERMS AND CONDITIONS FOR COPYING, DISTRIBUTION AND MODIFICATION

1. This License applies to any program or other work which contains a notice placed by the copyright holder saying it may be distributed under the terms of this General Public License. The "Program", below, refers to any such program or work, and a "work based on the Program" means either the Program or any derivative work under copyright law: that is to say, a work containing the Program or a portion of it, either verbatim or with modifications and/or translated into another Language. (Hereinafter, translation is included without limitation in the term "modification".) Each licensee is addressed as "you".

Activities other than copying, distribution and modification are not covered by this License; they are outside its scope. The act of running the Program is not restricted, and the output from the Program is covered only if its contents constitute a work based on the Program (independent of having been made by running the Program).

Whether that is true depends on what the Program does.

2. You may copy and distribute verbatim copies of the Program's source code as you receive it, in any medium, provided that you conspicuously and appropriately publish on each copy an appropriate copyright notice and disclaimer of warranty; keep intact all the notices that refer to this License and to the absence of any warranty; and give any other recipients of the Program a copy of this License along with the Program.

You may charge a fee for the physical act of transferring a copy, and you may at your option offer warranty protection in exchange for a fee.

3. You may modify your copy or copies of the Program or any portion of it, thus forming a work based on the Program, and copy and distribute such modifications or work under the terms of Section 1 above, provided that you also meet all of these conditions:
 - a) You must cause the modified files to carry prominent notices stating that you changed the files and the date of any change.
 - b) You must cause any work that you distribute or publish, that in whole or in part contains or is derived from the Program or any part thereof, to be licensed as a whole at no charge to all third parties under the terms of this License.

- c) If the modified program normally reads commands interactively when run, you must cause it, when started running for such interactive use in the most ordinary way, to print or display an announcement including an appropriate copyright notice and a notice that there is no warranty (or else, saying that you provide a warranty) and that users may redistribute the program under these conditions, and telling the user how to view a copy of this License. (Exception: if the Program itself is interactive but does not normally print such an announcement, your work based on the Program is not required to print an announcement.)

These requirements apply to the modified work as a whole. If identifiable sections of that work are not derived from the Program, and can be reasonably considered independent and separate works in themselves, then this License, and its terms, do not apply to those sections when you distribute them as separate works. But when you distribute the same sections as part of a whole which is a work based on the Program, the distribution of the whole must be on the terms of this License, whose permissions for other licensees extend to the entire whole, and thus to each and every part regardless of who wrote it.

Thus, it is not the intent of this section to claim rights or contest your rights to work written entirely by you; rather, the intent is to exercise the right to control the distribution of derivative or collective works based on the Program.

In addition, mere aggregation of another work not based on the Program with the Program (or with a work based on the Program) on a volume of a storage or distribution medium does not bring the other work under the scope of this License.

4. You may copy and distribute the Program (or a work based on it, under Section 2) in object code or executable form under the terms of Sections 1 and 2 above provided that you also do one of the following:
 - a) Accompany it with the complete corresponding machine-readable source code, which must be distributed under the terms of Sections 1 and 2 above on a medium customarily used for software interchange; or,
 - b) Accompany it with a written offer, valid for at least three years, to give any third party, for a charge no more than your cost of physically performing source distribution, a complete machine-readable copy of the corresponding source code, to be distributed under the terms of Sections 1 and 2 above on a medium customarily used for software interchange; or,
 - c) Accompany it with the information you received as to the offer to distribute corresponding source code. (This alternative is allowed only for noncommercial distribution and only if you received the program in object code or executable form with such an offer, in accord with Subsection b above.)

The source code for a work means the preferred form of the work for making modifications to it. For an executable work, complete source code means all the source code for all modules it contains, plus any associated interface definition files, plus the scripts used to control compilation and installation of the executable. However, as a special exception, the source code distributed need not include anything that is normally distributed (in either source or binary form) with the major components (compiler, kernel, and so on) of the

operating system on which the executable runs, unless that component itself accompanies the executable.

If distribution of executable or object code is made by offering access to copy from a designated place, then offering equivalent access to copy the source code from the same place counts as distribution of the source code, even though third parties are not compelled to copy the source along with the object code.

5. You may not copy, modify, sublicense, or distribute the Program except as expressly provided under this License. Any attempt otherwise to copy, modify, sublicense or distribute the Program is void, and will automatically terminate your rights under this License. However, parties who have received copies, or rights, from you under this License will not have their licenses terminated so long as such parties remain in full compliance.
6. You are not required to accept this License, since you have not signed it. However, nothing else grants you permission to modify or distribute the Program or its derivative works. These actions are prohibited by law if you do not accept this License. Therefore, by modifying or distributing the Program (or any work based on the Program), you indicate your acceptance of this License to do so, and all its terms and conditions for copying, distributing or modifying the Program or works based on it.
7. Each time you redistribute the Program (or any work based on the Program), the recipient automatically receives a license from the original licensor to copy, distribute or modify the Program subject to these terms and conditions. You may not impose any further restrictions on the recipients' exercise of the rights granted herein. You are not responsible for enforcing compliance by third parties to this License.
8. If, as a consequence of a court judgment or allegation of patent infringement or for any other reason (not limited to patent issues), conditions are imposed on you (whether by court order, agreement or otherwise) that contradict the conditions of this License, they do not excuse you from the conditions of this License. If you cannot distribute so as to satisfy simultaneously your obligations under this License and any other pertinent obligations, then as a consequence you may not distribute the Program at all. For example, if a patent license would not permit royalty-free redistribution of the Program by all those who receive copies directly or indirectly through you, then the only way you could satisfy both it and this License would be to refrain entirely from distribution of the Program.

If any portion of this section is held invalid or unenforceable under any particular circumstance, the balance of the section is intended to apply and the section as a whole is intended to apply in other circumstances.

It is not the purpose of this section to induce you to infringe any patents or other property right claims or to contest validity of any such claims; this section has the sole purpose of protecting the integrity of the free software distribution system, which is implemented by public license practices. Many people have made generous contributions to the wide range of software distributed through that system in reliance on consistent application of that system; it is up to the author/donor to decide if he or she is willing to distribute software through any other system and a licensee cannot impose that choice.

This section is intended to make thoroughly clear what is believed to be a consequence of the rest of this License.

9. If the distribution and/or use of the Program is restricted in certain countries either by patents or by copyrighted interfaces, the original copyright holder who places the Program under this License may add an explicit geographical distribution limitation excluding those countries, so that distribution is permitted only in or among countries not thus excluded. In such case, this License incorporates the limitation as if written in the body of this License.
10. The Free Software Foundation may publish revised and/or new versions of the General Public License from time to time. Such new versions will be similar in spirit to the present version, but may differ in detail to address new problems or concerns.

Each version is given a distinguishing version number. If the Program specifies a version number of this License which applies to it and "any later version", you have the option of following the terms and conditions either of that version or of any later version published by the Free Software Foundation. If the Program does not specify a version number of this License, you may choose any version ever published by the Free Software Foundation.

11. If you wish to incorporate parts of the Program into other free programs whose distribution conditions are different, write to the author to ask for permission. For software which is copyrighted by the Free Software Foundation, write to the Free Software Foundation; we sometimes make exceptions for this. Our decision will be guided by the two goals of preserving the free status of all derivatives of our free software and of promoting the sharing and reuse of software generally.

NO WARRANTY

12. BECAUSE THE PROGRAM IS LICENSED FREE OF CHARGE, THERE IS NO WARRANTY FOR THE PROGRAM, TO THE EXTENT PERMITTED BY APPLICABLE LAW. EXCEPT WHEN OTHERWISE STATED IN WRITING THE COPYRIGHT HOLDERS AND/OR OTHER PARTIES PROVIDE THE PROGRAM "AS IS" WITHOUT WARRANTY OF ANY KIND, EITHER EXPRESSED OR IMPLIED, INCLUDING, BUT NOT LIMITED TO, THE IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE. THE ENTIRE RISK AS TO THE QUALITY AND PERFORMANCE OF THE PROGRAM IS WITH YOU. SHOULD THE PROGRAM PROVE DEFECTIVE, YOU ASSUME THE COST OF ALL NECESSARY SERVICING, REPAIR OR CORRECTION.
13. IN NO EVENT UNLESS REQUIRED BY APPLICABLE LAW OR AGREED TO IN WRITING WILL ANY COPYRIGHT HOLDER, OR ANY OTHER PARTY WHO MAY MODIFY AND/OR REDISTRIBUTE THE PROGRAM AS PERMITTED ABOVE, BE LIABLE TO YOU FOR DAMAGES, INCLUDING ANY GENERAL, SPECIAL, INCIDENTAL OR CONSEQUENTIAL DAMAGES ARISING OUT OF THE USE OR INABILITY TO USE THE PROGRAM (INCLUDING BUT NOT LIMITED TO LOSS OF DATA OR DATA BEING RENDERED INACCURATE OR LOSSES SUSTAINED BY YOU OR THIRD PARTIES OR A FAILURE OF THE PROGRAM TO OPERATE WITH ANY OTHER PROGRAMS), EVEN IF SUCH HOLDER OR OTHER PARTY HAS BEEN ADVISED OF THE POSSIBILITY OF SUCH DAMAGES.

END OF TERMS AND CONDITIONS